



DOCK LEVELER SIZE	WIDTH (W)	LENGTH (L)	HEIGHT (H)	LIP (C) LENGTH	BUFFER SIZE (OPTIONAL)
	2000	2500	480	400	200X300X100


PIT DIMENSION	WIDTH (W 1)	LENGTH (L 1)	DEPTH (D)	ALL DIMENSIONS ARE IN mm
	2050	2570	485	

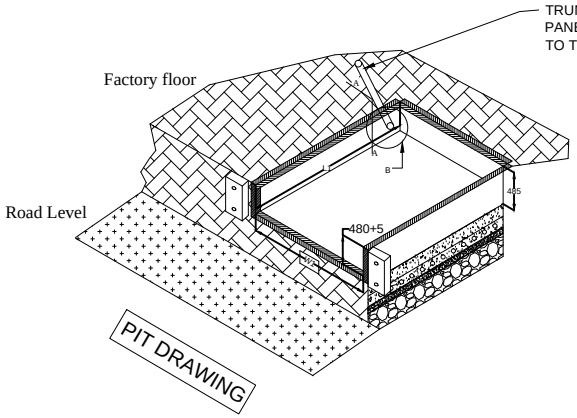





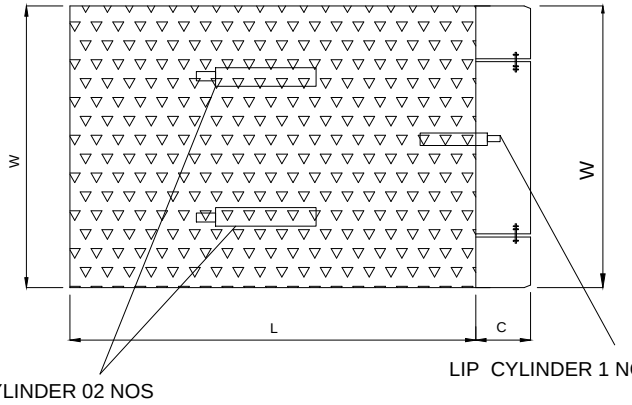

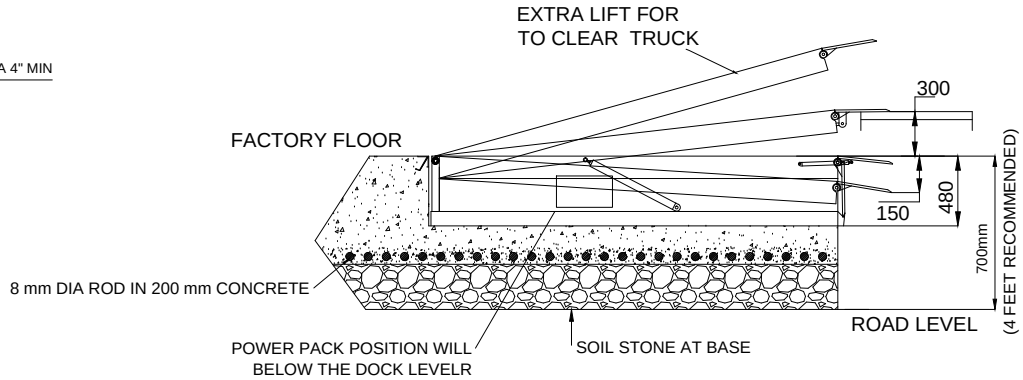

NOTE: -

1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY CABLE LENGTH STD. 5000 MM)
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 12000 KGB FLOOR LOADING
4. MOUNTING ARRANGEMENT FOR BUFFERS SHOULD BE MADE AS PER BUFFER DRAWING (IF ORDERED)
5. FABRICATION TOLERANCE FOR PLATFROM SIZE WILL BE +-15 MM

DOCK LEVELER- 06 TON CAPACITY. QTY-01NOS

CLIENT APPORVAL-				NIHVA TECHNOLOGIES PVT. LTD.	NIHVA TECHNOLOGY PVT. LTD., PUNE Tel : 020 66304033 Email:- info@nihva.com Website:- www.nihva.com
	NAME	DATE	SIGN.	CLIENT - SCON	
DRAWN	SURAJ	24/01/2018		PROJECT - MINDARIKA PVT LTD.	
CHECKED	OMKAR	24/01/2018		SITE - CHAKAN,PUNE	
CHECKED	SHEKHAR	24/01/2018		DWG. NO. - NIHVA/17-18/0339	REV- 0
ALL DIMENSION ARE IN mm				If any queries contact : design@nihva.com	