

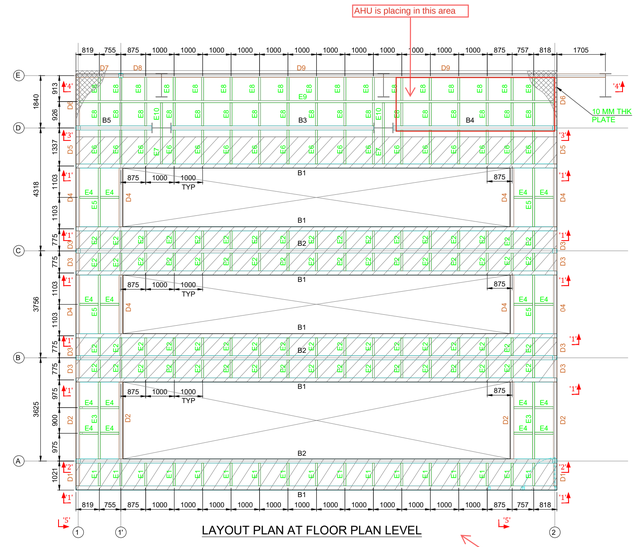


LAYOUT PLAN AT FLOOR PLAN LEVEL

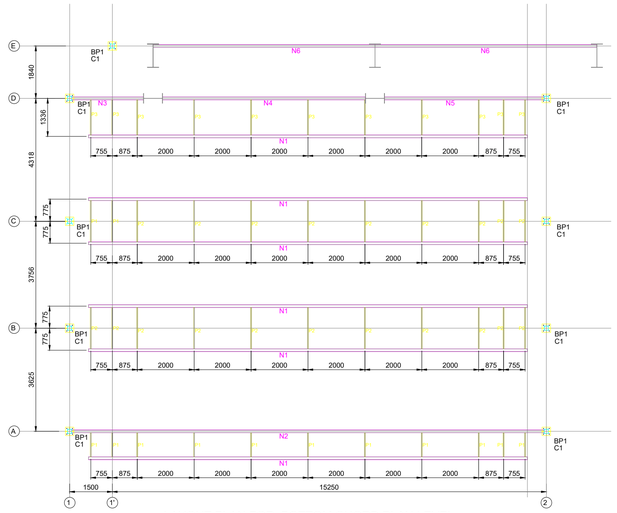


LAYOUT PLAN FOR BOTTOM CHORD PLAN LEVEL


this Structure layout is OK for us . So please proceed for the BOM and manufacturing drawings

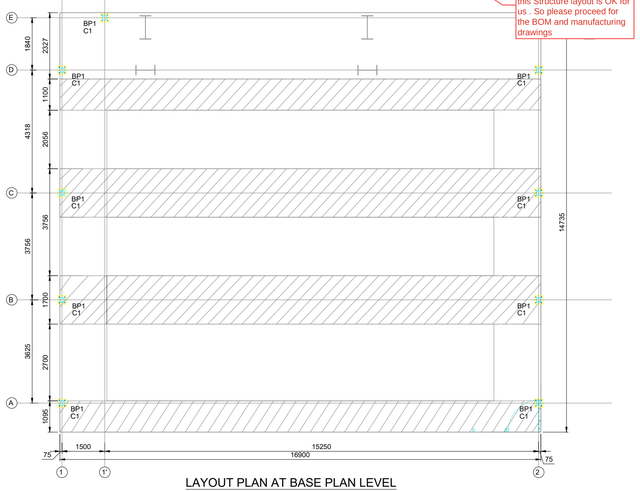


LAYOUT PLAN AT BASE PLAN LEVEL

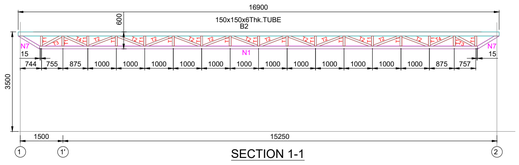


SECTION 1-1

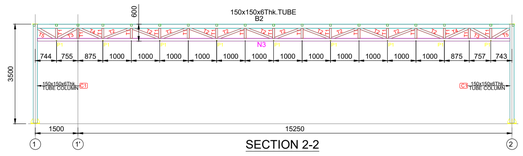


SECTION 2-2

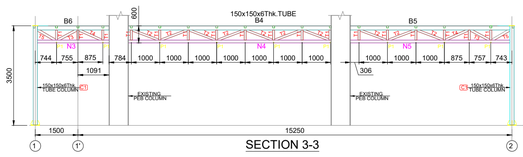

SECTION 3-3

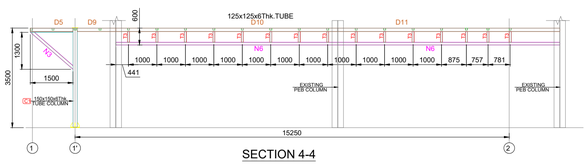

SECTION 4-4



DETAIL FOR BASE PLATE FOR 150X150X6THK.

MEMBER (BEAMS)	TUBE SECTION	
C	150x150x6Thk.TUBE	
B	150x150x6Thk.TUBE	
D	125x125x6Thk.TUBE	
E	75x75x6Thk.TUBE	
N	100x100x5Thk.TUBE	
T	72x72x3.2Thk.TUBE	
P	32x32x3.2Thk.TUBE	

10 mm THK. PLATE	156.37 SQ.M

MTO

ITEM No.	DESCRIPTION	WD. mm	LG. mm	UNIT WT. (kg/m)	QTY.	WEIGHT IN kg. UNIT	TOTAL
BP1	20thk pl.	300	300.00	157.00	9	14.13	127.17
C1	150x150x6Thk.		3480.00	26.40	9	91.87	826.85
B1	150x150x6Thk.		16900.00	26.40	6	446.16	2676.96
B2	150x150x6Thk.		16600.00	26.40	3	438.24	1314.72
B3	150x150x6Thk.		7122.00	26.40	1	188.02	188.02
B4	150x150x6Thk.		5606.00	26.40	1	148.00	148.00
B5	150x150x6Thk.		2516.00	26.40	1	66.42	66.42
D1	125x125x6Thk.		796.00	21.69	2	17.27	34.53
D2	125x125x6Thk.		2700.00	21.69	4	58.56	234.25
D3	125x125x6Thk.		625.00	21.69	8	13.56	108.45
D4	125x125x6Thk.		2056.00	21.69	8	44.59	356.76
D5	125x125x6Thk.		1187.00	21.69	2	25.75	51.49
D6	125x125x6Thk.		1702.00	21.69	2	36.92	73.83
D7	125x125x6Thk.		1500.00	21.69	1	32.54	32.54
D8	125x125x6Thk.		1351.00	21.69	1	29.30	29.30
D9	125x125x6Thk.		7792.00	21.69	2	169.01	338.02
E1	75X75X6Thk.		795.00	12.27	17	9.75	165.83
E2	75X75X6Thk.		625.00	12.27	68	7.67	521.48
E3	75X75X6Thk.		2700.00	12.27	2	33.13	66.26
E4	75X75X6Thk.		656.00	12.27	16	8.05	128.79
E5	75X75X6Thk.		2056.00	12.27	4	25.23	100.91
E6	75X75X6Thk.		1187.00	12.27	17	14.56	247.60
E7	75X75X6Thk.		1258.00	12.27	2	15.44	30.87
E8	75X75X6Thk.		814.00	12.27	34	9.99	339.58
E9	75X75X6Thk.		16650.00	12.27	1	204.30	204.30
E10	75X75X6Thk.		885.00	12.27	2	10.86	21.72
N1	100X100X6Thk.		15425.00	16.98	6	261.92	1571.50
N2	100X100X6Thk.		16600.00	16.98	1	281.87	281.87
N3	100X100X6Thk.		2516.00	16.98	1	42.72	42.72
N4	100X100X6Thk.		7122.00	16.98	1	120.93	120.93
N5	100X100X6Thk.		5606.00	16.98	1	95.19	95.19
N6	100X100X6Thk.		7792.00	16.98	2	132.31	264.62
N7	100X100X6Thk.		864.00	16.98	12	14.67	176.05
N8	100X100X6Thk.		1305.00	16.98	8	22.16	177.27
N9	100X100X6Thk.		1413.00	16.98	2	23.99	47.99
N10	100X100X6Thk.		1700.00	16.98	2	28.87	57.73
T1	72X72X3.2Thk.		350.00	6.71	136	2.35	319.40
T2	72X72X3.2Thk.		969.00	6.71	94	6.50	611.19
T3	72X72X3.2Thk.		736.00	6.71	16	4.94	79.02
T4	72X72X3.2Thk.		850.00	6.71	16	5.70	91.26
T5	72X72X3.2Thk.		692.00	6.71	4	4.64	18.57
P1	32X32X3.2Thk.		795.00	2.69	11	2.14	23.52
P2	32X32X3.2Thk.		1400.00	2.69	22	3.77	82.85
P3	32X32X3.2Thk.		1187.00	2.69	11	3.19	35.12
						TOTAL	12531.42

PN
0°
270° 90°
180°
ORIENTATION

STEEL NOTES:-

1. ALL DIMENSIONS ARE IN MILLIMETRES & LEVELS ARE IN METRES.
2. ALL STRUCTURAL STEEL AS PER IS:2062.
3. PROVIDE WELDING AS PER IS:816.
4. PROVIDE MIN. 6MM WELD.
5. USE ELECTRODS AS PER IS:814 (PT.-I).
6. FILLET/ BUTT WELD SHALL BE OF 6MM SIZE AND SHALL BE CONTINUOUS.
7. FABRICATION AND ERECTION SHALL BE AS PER IS:800 AND IS:803.
8. WELD SHALL BE GROUND SMOOTH.
9. ALL GUSSET PLATES SHALL BE MIN. 8 THK.
10. ALL M.S. BLACK BOLTS AND NUTS SHALL CONFORM TO IS:1363(PT. 1 TO 3).
11. ALL STRUCTURE WILL BE PROVIDED WITH MIN. ONE COAT OF EPOXY PRIMER AND ONE COATS OF PU PAINT.
12. ALL CONNECTIONS SHALL BE FULLY WELDED AFTER BOLTING.

REV.NO.	DESCRIPTION.	REV.DATE	DRAWN.	CHKD.	APPD.
1	RELEASE FOR APPROVAL.	31.07.26	SVP	HAB	HAB
0	RELEASE FOR APPROVAL.	20.07.26	SVP	HAB	HAB

DWG.TITLE :- NEOTRAFO - FABRICATION FOR COLLAPS ROOF

CLIENT	NEOTRAFO SOLUTIONS PVT.LTD. HYDERABAD, INDIA.
PROJECT NIHVA Technologies Pvt. Ltd.	NIHVA TECHNOLOGIES PVT.LTD. WEBSITE - www.nihva.com
LOCATION :	HYDERABAD
SALT Design Services	SALT DESIGN SERVICES 4-PUSHKAR NIRZAR, SBI COLONY, NEAR ICICI BANK, KOTHRUD, PUNE-411038.

DRAWN : SVP	CHECKED : HAB	SCALE: NTS
APPROVED : HAB	JOB CODE. : ----	DATE: 15.01.26

DWG.NO: SALT-0000-STR-0003 (SH-1OF1) REV. - R1 SIZE. - A3