**NIHVA Technologies Pvt. Ltd.**
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

**An ISO 9001:2015 Certified Company**

**GST Pune : 27AAECN0437H1ZM**

# NIHVA Sales Quotation

**Om Logistics Ltd .**
130, Ring Road,
Transport Center, New Delhi-110035, India

**Date : 30.11.2019**
Quote NO : SQT.19.20.2278
**Kind Attn : Mr.Chetan Sharma**
Email Id : purchase1@omlogistics.co.in
Contact No: **9899914529**

**Project Name & Location: Om Logistics Ltd, Chakan.**

**Subject : Quotation for Dock Leveller.**

Dear Sir,

**Thank you for your opportunity and trust shown on "NIHVA" your preferred partner for innovative solutions.**
**This has reference to your above mentioned requirement, please find below our Solutions.**


| Sr. No | Description | Pages |
|---|---|---|
| A. | Commercial Offer | 1 |
| B. | Technical Specification | 2 |
| C. | General Conditions | 3 |
| D. | Terms & Condtions | 3 |


**A) Commercial Offer**


| Sr No | Description | Size | | Qty | Supply Charges in INR | | Installation Charges in INR | |
|---|---|---|---|---|---|---|---|---|
| | | Clear Width (mm) | Clear Length (mm) | (Nos) | Unit Price | Total Amount | Unit Price | Total Amount |
| | **Option -1** | | | | | | | |
| **A** | **NIHVA Dock Leveller Capacity 9 T** | 2000 | 2500 | 17 | 210,000 | 3,570,000 | 20,000 | 340,000 |
| | **Option -2** | | | | | | | |
| **B** | **NIHVA Dock Leveller Capacity 12 T** | 2000 | 2500 | 17 | 230,000 | 3,910,000 | 20,000 | 340,000 |
| | | | | **Total** | | | | |
| **C** | P&F Charges | | | 3% | | **Extra** | | |
| | **Total Without Taxes** | | | | | | | - |
| | GST Extra @ 18% | | | 18% | | **Extra** | | - |
| | **Total With Taxes** | | | | | | | - |
| **D** | Transportation Charges | | | | | **In Client Scope** | | |
| **E** | Unloading Charges @ Site | | | | | **In Client Scope** | | |


**NIHVA Technologies Pvt. Ltd.**
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

**An ISO 9001:2015 Certified Company**

**GST Pune : 27AAECN0437H1ZM**

**B) Technical Specification**

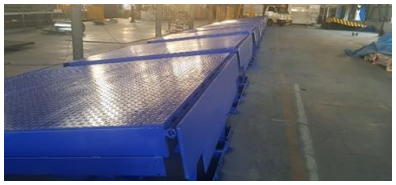



| Description | Specifications |
|---|---|
| Capacity | 9 Ton / 12 Ton |
| Dock operation mode | AC power pack hydraulically operated |
| Lip operation mode | Hydraulic |
| Operation control | Through panel |
| Loading platform height from road | 1250mm |
| Travel above & below dock level | (+) 300 / (-) 250 mm |
| Platform Size (W x L) | 2000 mm x 2500 mm |
| Lip size (W x L ) | 2000 x 400 mm |
| Shut Height | 480 mm |
| Overall length | 2000mm x 2500mm + Lip Length (400mm ) |
| Maximum slope can be achieved | 10% |
| Clear Pit dimensions (W x L x D) | (W) 2050mm x (L) 2050 mm x (D)485 mm |
| Hydraulic power pack | Standard |
| Driver type | Direct by electric Motor |
| Motor Ratings | 1 H.P |
| Pump design flow | 2.5 LPM |
| Pump pressure | 120 bar Operating 200 bar Max. |
| Safety valve set pressure | 120 Kg/cm² |
| Pump Type | Gear |
| Volume of oil receiver | 7 Lit |
| No Of Deck cylinder | 2 No |
| Lip Cylinder | 1 No |
| Dock Bumper | Pair of Dock Bumper |

**NIHVA Technologies Pvt. Ltd.**
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

**An ISO 9001:2015 Certified Company**

**GST Pune : 27AAECN0437H1ZM**

**C) General Conditions**

1 Installation will start after receiving of Site Readyness Photographs or written Email communication.

2 We will mobilize the Installation Team in 3 - 4 working days, after reciept of Site Readyness Confirmation

3 For any reason if we need to stop our Installation and demobilize the Team without completing the Work, then extra cost will be applicable for Remobilizing the Team.

4 If Lifting Equipements are in NIHVA Scope, then those will be used for Installation purpose only and not for any other works.

**Note: Please find below List which are in Client Scope**

| Sr. No | Description | Remark |
|---|---|---|
| 1 | Secured and fully covered Store area to keep the material | In Client Scope |
| 2 | Scaffolding/Hydra/Crane/Forklift etc - Required for Installation at Site | In Client Scope |
| 3 | Electrical Supply on the site single phase/three phase points at different places. | In Client Scope |
| 4 | Any civil / masonry/structural work required | In Client Scope |
| 5 | All structure support required | In Client Scope |
| 6 | In Case of any changes in the layout as per site requirements after the shipment of material , the additional quantities and the wastage. | In Client Scope |
| 7 | Conduits, Cables required | In Client Scope |

**D) Terms & Conditions**

**Price** : Ex Works Pune

**Delivery** : 6 - 7 weeks from the date of receipt of confirmed purchase order, Advance Payment & Drawing approval.

**Payment** : 80% Advance along with Confirmed Purchase Order & Balance before dispatch.

**Validity** : Validity of Offer is 15 days from the date of quotation

**Warranty** : 12 months from the date of supply.

For any further Clarification /Information in this Concern, Please feel free to Contact **Mr.Ravindra Kharat on 7410169333.**

With Best Regards
Ulka Auti
7219206333
For NIHVA Technologies Pvt Ltd