



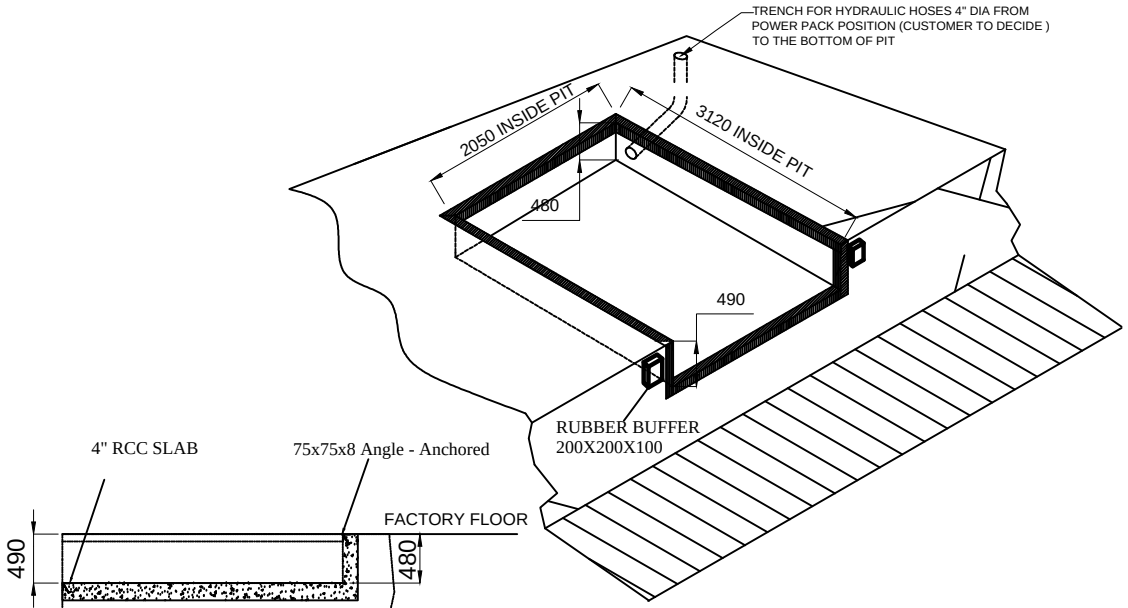


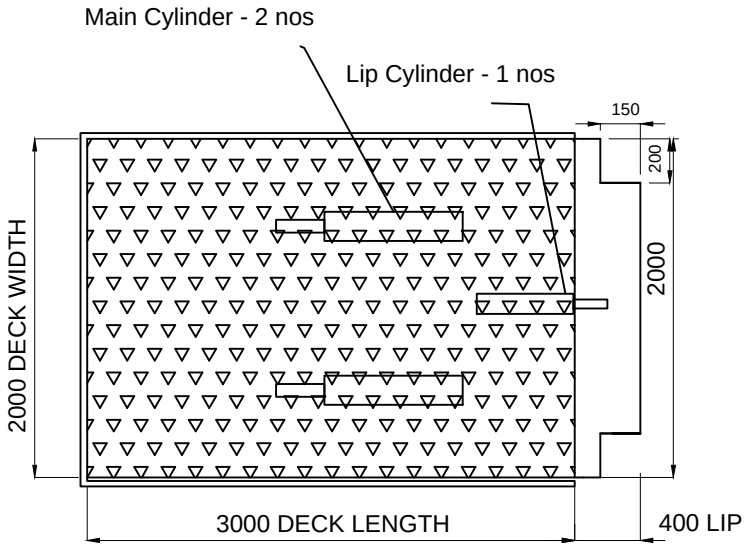

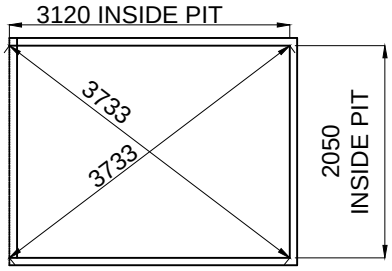

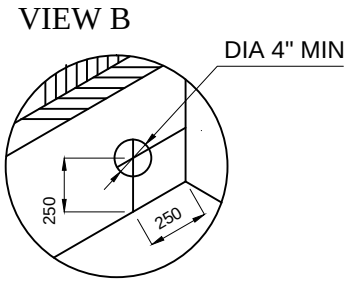

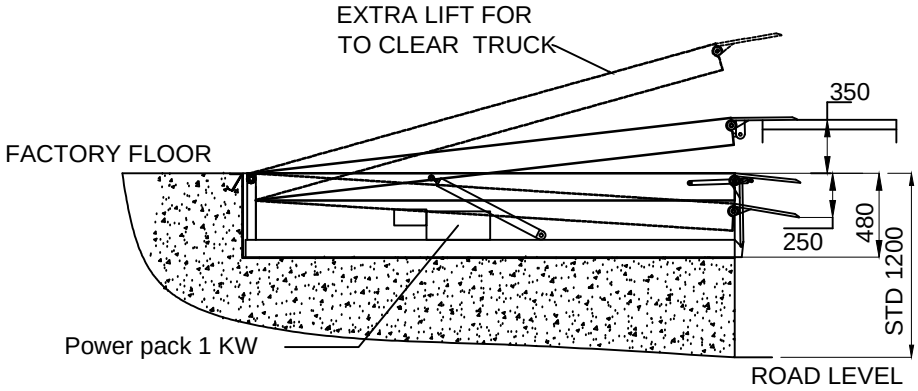

NOTE:

1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY HOSE LENGTH STD. 3000 MM)
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 18000 KGB FLOOR LOADING
4. FABRICATION TOLERANCE FOR PLATFORM SIZE WILL BE ± 10 MM .
5. PIT, DUCT FOR HOSES & ALL CIVIL WORK IS IN CLIENT SCOPE .

SPECIFICATIONS OF DOCK LEVELER -

1. PLATFORM SIZE -2000WX3000L
2. LIFT ABOVE- 350 MM
3. LIFT DOWN-250 MM
4. PIT SIZE- 2050WX3120LX480D
5. CAPACITY - 6 TON POINT LOAD 15 TON UDL
6. FINISH - HOT DEEP GALVANISING
7. QTY - TOTAL 4 NOS OF DOCK LEVER (2 NOS FOR PHASE 1 & 2 NOS FOR PHASE 2)
8. HYDRAULIC POWERPACK - 1kW , 3 PHASE AC , 50 Hz

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

TITLE			
PIT MOUNTED ELECTRO-HYDRAULIC DOCK LEVELER			NIHVA TECHNOLOGIES PVT. LTD.
	SIGN	DATE	
DRAWN	SS	17.7.2021	CLIENT - SUBHASHREE ENGG & CONSTRUCTIONS PVT LTD
CHECK	VJ		PROJECT - E+H FLOWTECH INDIA PVT LTD
REV.	AK		SITE - AURANGABAD
APPROVAL	VT		DWG. NO. : NIHVA/21-22/044/DL — REV NO - R00
If any queries contact : nihvacare@nihva.com			SCALE: NTS — WT: — SHEET: 01 OF 01
ALL DIMENSION ARE IN mm			

NIHVA TECHNOLOGY PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com