

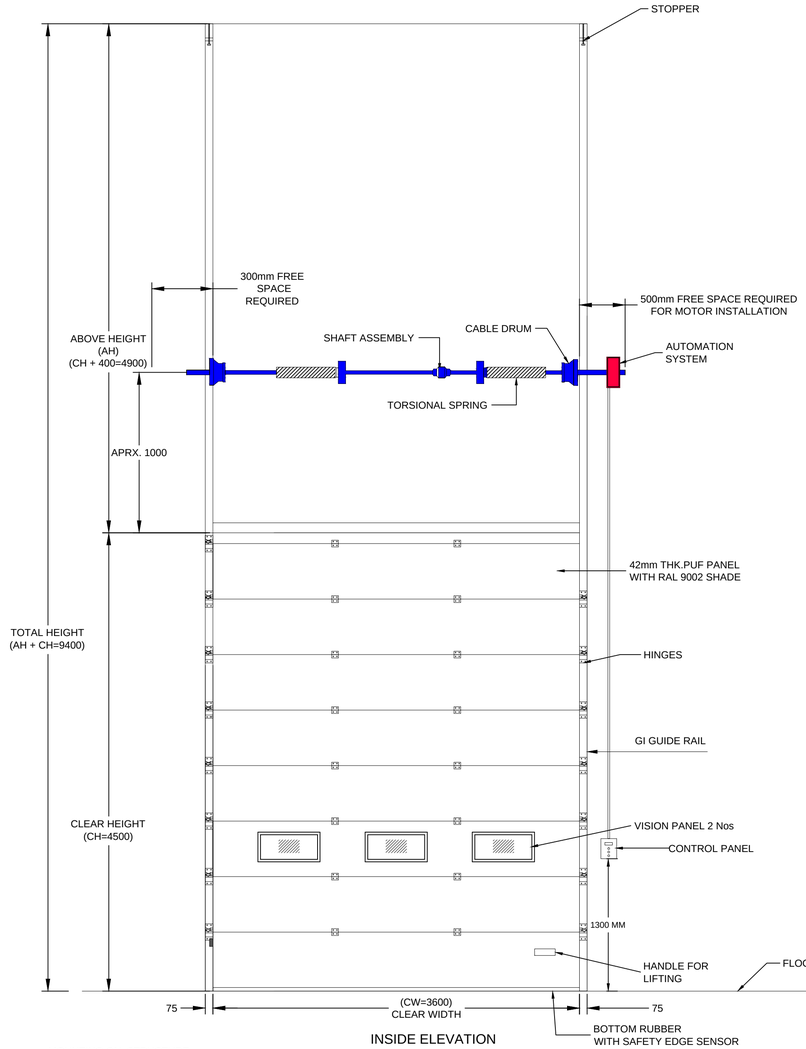



INSIDE ELEVATION

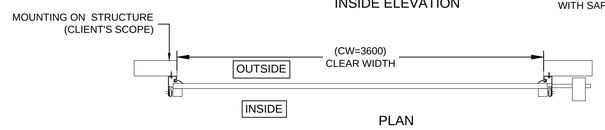

PLAN

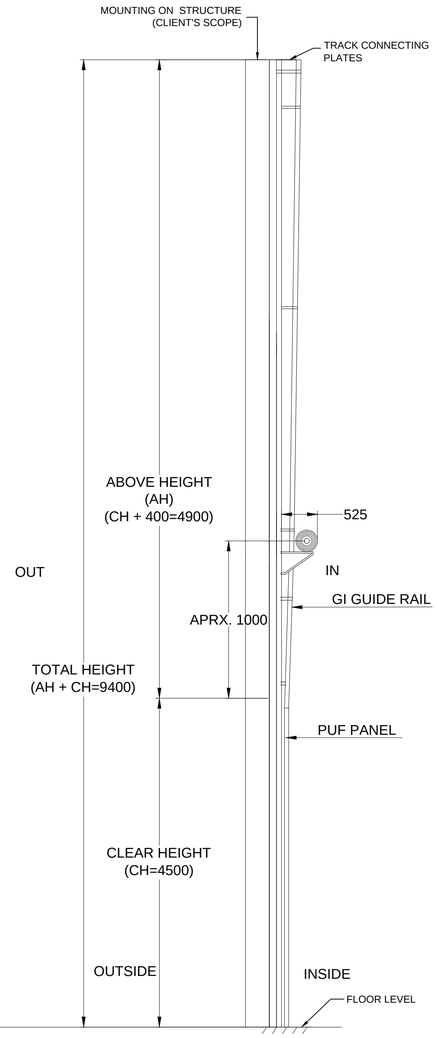

SIDE VIEW

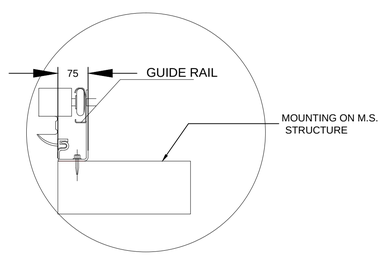

TRACK DETAILS

REV	DATE	DRAWN	REMARK

DIMENSION :

CLEAR WIDTH (CW)	CLEAR HEIGHT (CH)	QUANTITY
3600 mm	4500 mm	1 NOS

TECHNICAL DATA :

COMPONENTS	MATERIALS	SPECIFICATIONS
DOOR PANELS	GI & PUF	42 mm CFC- FREE POLYURETHANE WITH 0.5mm THK, GI PRECOATED PANELS.
DOOR HINGE	————	HEAVY DUTY HINGES FOR INTERLOCKING OF PANELS
SHAFT ASSEMBLY	STD.	TORSIONAL SPRING WITH SHAFT & BEARING PLATES
FINISH		PANELS ARE IN STANDARD RAL 9002 GREY WHITE COLOR

ACCESSORIES-

1. SAFETY EDGE SENSOR.

IMPORTANT NOTES:

1. REQUIRED STRUCTURE FOR DOOR IS IN CLIENT'S SCOPE.
2. SINGLE PHASE POWER SUPPLY REQUIRED AT DOOR LOCATION.
3. ALL CIVIL WORK IS IN CLIENT'S SCOPE.

NIHVA TECHNOLOGIES PVT. LTD.

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Email:- info@nihva.com
Website:- www.nihva.com

TITLE:

VERTICAL LIFTING SECTIONAL DOOR

CLIENT'S APPROVAL :

CLIENT - AJAY KALE AND ASSOSIATES

PROJECT -

SITE LOCATION - PIRANGUT

DWG. NO. : NIHVA/21-22/CLT/280			REV- 00
SCALE: NTS	WT:		SHEET:1 OF 1

	NAME	DATE	SIGN
DRAWN	G.I.P.	13.12.2021	
CHECK	A.K.	13.12.2021	
APPROVAL			

If any queries contact : design@nihva.com

NOTE: ALL DIMENSIONS ARE IN mm

THIS DRAWING & DESIGNING IS THE PROPERTY OF NIHVA TECHNOLOGIES. NOT TO BE SOLD OR COPIED TO ANY OTHER CONCERN.