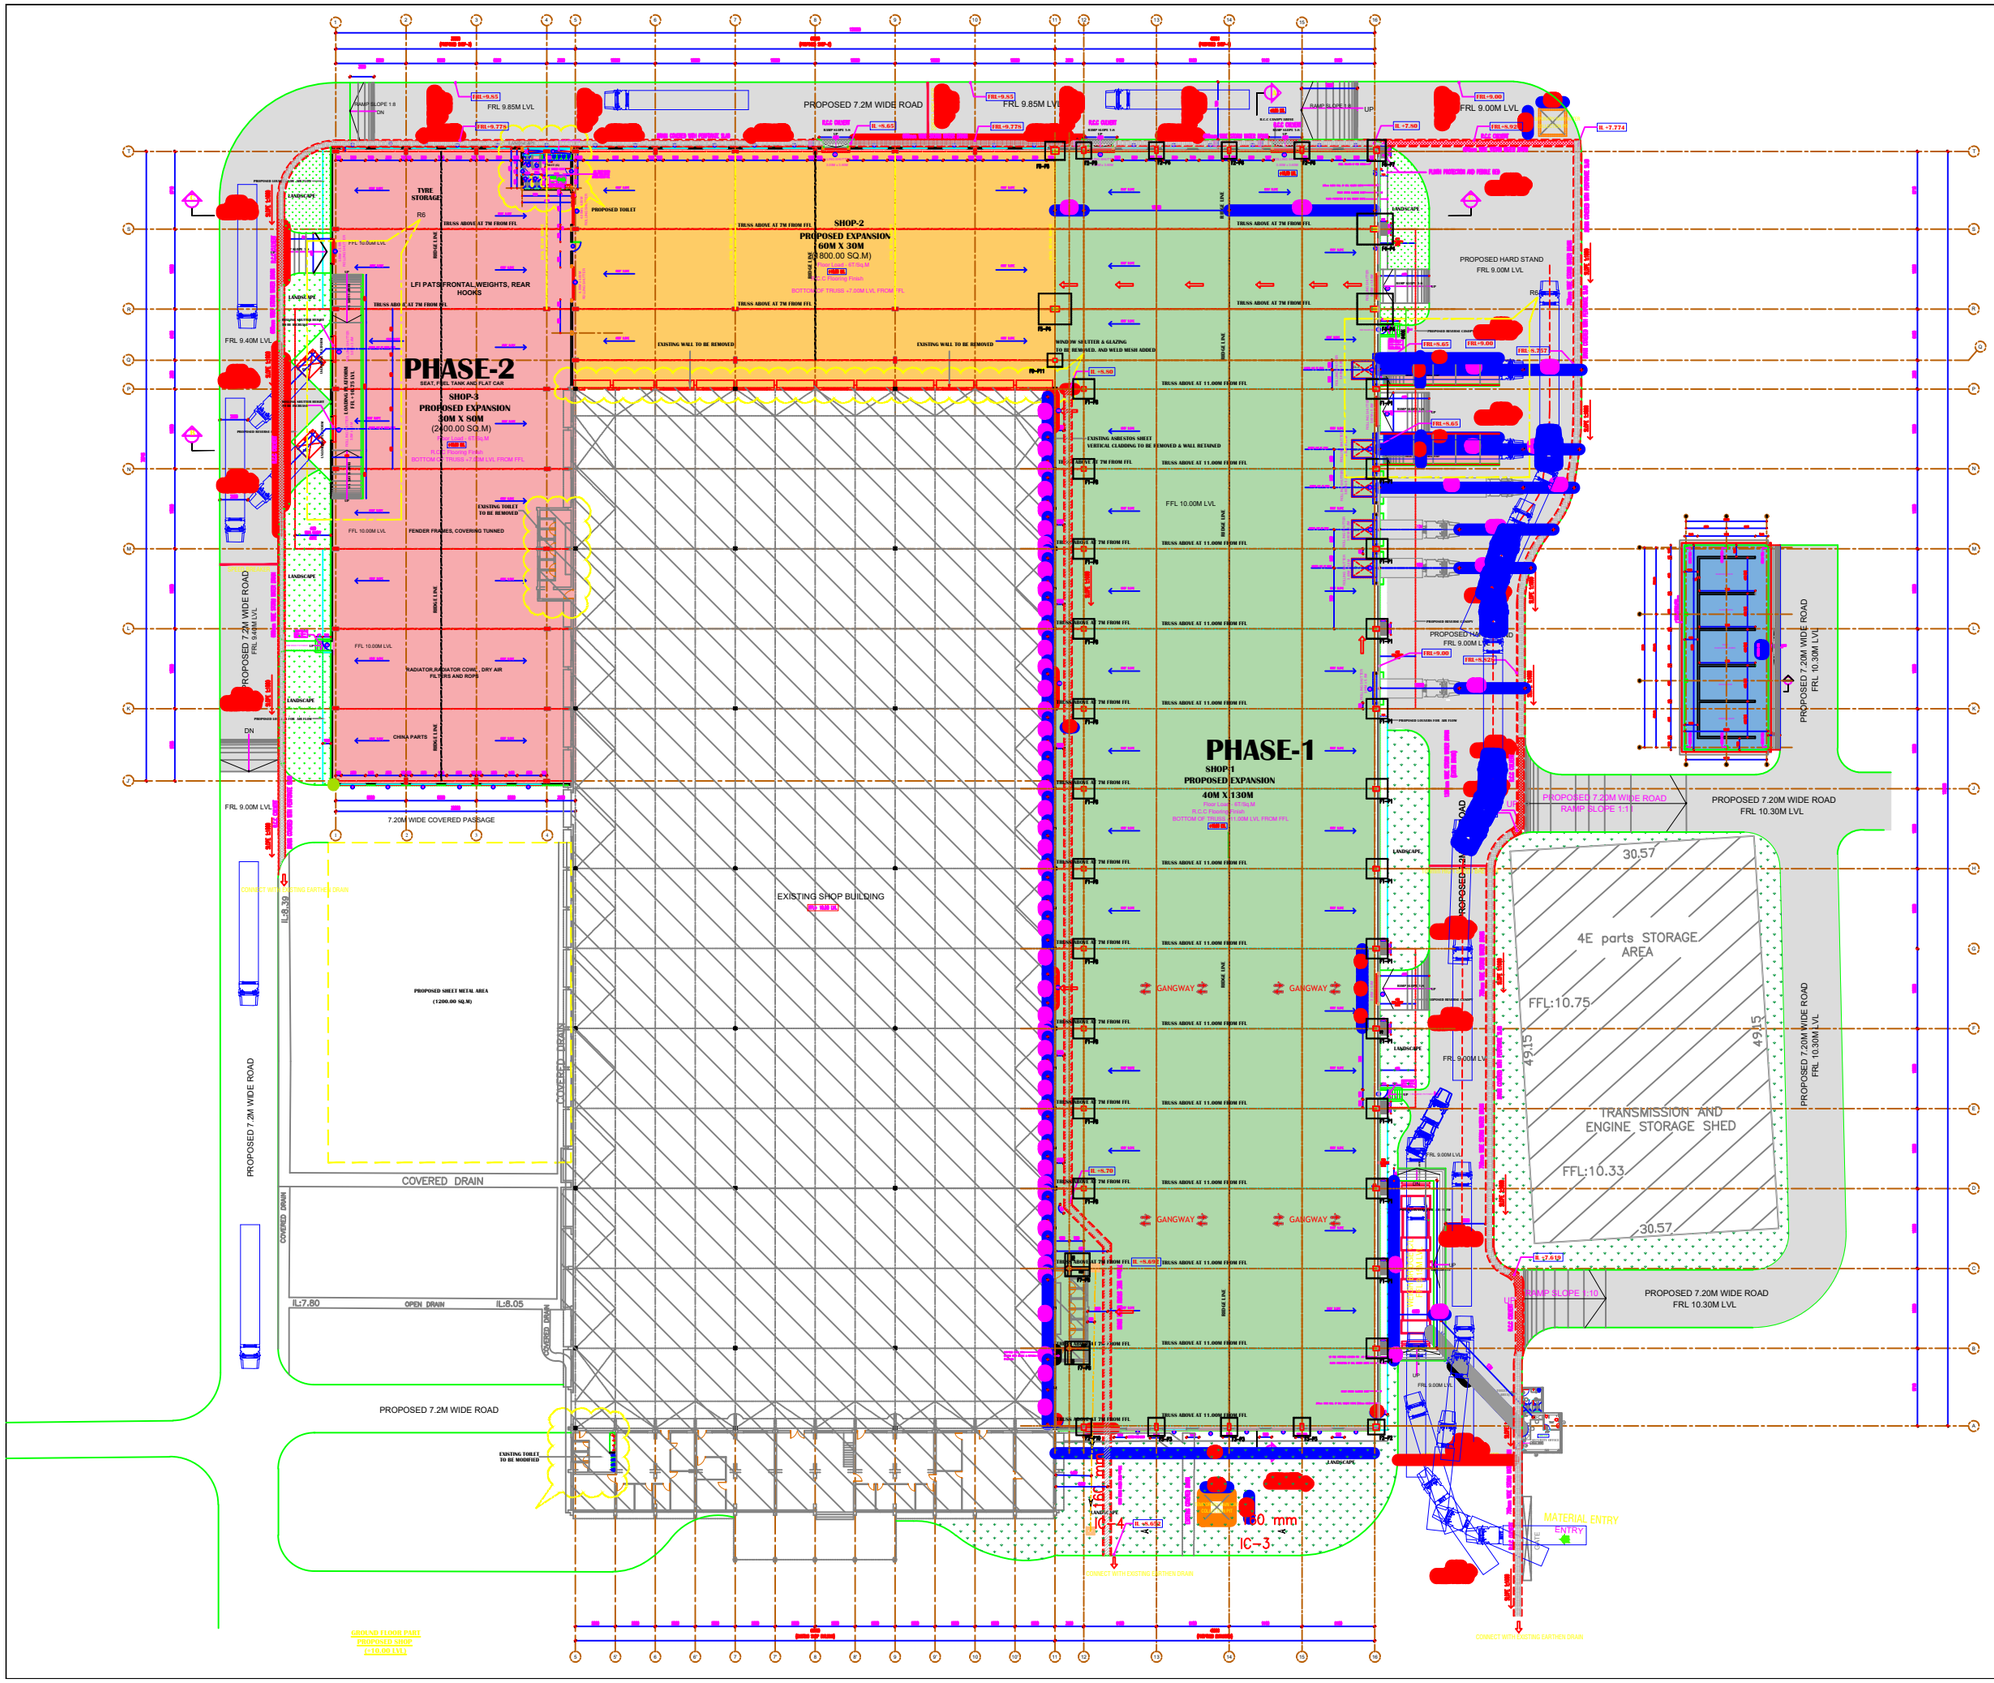


SCHEDULE OF OPENINGS:

TYPE	OPENING SIZE WIDTH	OPENING SIZE HEIGHT	CASEMENT SIZE WIDTH	CASEMENT SIZE HEIGHT	DESCRIPTION	NOS.
ROLLING SHUTTER:						
RS	3600	3000	-	-	NORMIZED ROLLING SHUTTERS TO DETAIL	08
RS1	3000	3600	-	-	NORMIZED ROLLING SHUTTERS TO DETAIL	07
RS2	4000	4000	-	-	NORMIZED ROLLING SHUTTERS TO DETAIL	02
RS3	3600	3600	-	-	NORMIZED ROLLING SHUTTERS TO DETAIL	03
DOORS:						
FD	1200	2100 (Bottom Door)			SHAKTI MET DOOR VIEW PANEL & ALUMINIUM FRAMED WITH FIXED GLAZING	03
D1	1200	2100	-	-	SHAKTI MET DOOR WITH VIEW PANEL	01
D2	900	2100	-	-	SHAKTI MET DOOR WITHOUT VIEW PANEL	02
D3	750	1650	-	-	PD OPENABLE DOOR WITHOUT VIEW PANEL	04
WINDOWS:						
W	3000	2400	2975	2375	ALUMINIUM FRAMED WITH FIXED GLASS WITH LOUVER	39
VENTILATOR:						
V	6000	1450	5975	1425	ALUMINIUM FRAME WITH TOP HUNG, FIXED GLASS AND EXHAUST FAN	02

NOTE:

1. ALL OPENING DIMENSIONS TO BE CHECKED AND VERIFIED AT SITE BEFORE FABRICATION OF CASEMENTS.
2. FOR ALL AIR CONDITIONED AREAS, DOUBLE GLAZING TO BE USED.

REFERENCE:

FLOOR FINISH	SKIRTING FINISH	SKIRTING HEIGHT (IN MM)
	DADO FINISH	DADO HEIGHT (IN MM)
CEILING FINISH	CEILING HEIGHT (IN METERS)	WALL FINISH

PP	PLASTERED & PAINTED
VC(V)	VERIFIED CERAMIC TILE OF UNIT FINISH OF APPROVED COLOUR, SIZE & MAKE
GR	GRANITE FINISH

NOTE:

FG = FIXED GLASS
TH = TOP HUNG
FC = FALSE CEILING

GENERAL NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETRES AND ARE UNFINISHED DIMENSIONS UNLESS OTHERWISE SPECIFIED.
2. ALL OPENING DIMENSIONS TO BE CHECKED AND VERIFIED AT SITE BEFORE FABRICATION OF CASEMENTS.
3. ALL LEVELS ARE IN MILLIMETRES AND ARE FINISHED LEVELS OTHER THAN WHAT IS MENTIONED FOR OPEN TERRACES.
4. DO NOT SCALE DRAWINGS. ONLY WRITTEN DIMENSIONS SHALL BE FOLLOWED, ANY DISCREPANCIES NOTED SHALL BE BROUGHT TO THE NOTICE OF THE ARCHITECT PRIOR TO EXECUTION.
5. FOR DETAILS SUCH AS DOORS, WINDOWS, GRILLS, GATES, SKYLIGHT, TOILETS, SYMBOLISES, HANDRAILS,RAILING, ETC. REFER RESPECTIVE ARCHITECTURAL DRAWINGS.
6. THESE DRAWINGS SHALL BE CORRELATED AND READ IN CHARACTER WITH RESPECTIVE CONSULTANT'S APPROVED DRAWINGS FOR STRUCTURAL MEMBERS, SERVICES SUCH AS PLUMBING,SANITARY,ELECTRICAL, AIR-CONDITIONING,VENTILATION, RAINWATER DRAINAGE & WATERPROOFING AND LANDSCAPING. ANY DISCREPANCIES NOTED SHALL BE BROUGHT TO THE NOTICE OF THE ARCHITECT PRIOR TO EXECUTION.
7. ALL OPEN/EXPOSED TERRACE ROOF SLABS TO HAVE WATERPROOFING AND INSULATION TREATMENT AS PER SPECIFICATIONS.
8. ALL OPENING DIMENSIONS TO BE CHECKED AND VERIFIED AT SITE BEFORE FABRICATION OF CASEMENTS.
9. OPENING SIZES MENTIONED IN THE SCHEDULE ARE CLEAR OPENING SIZES AFTER PLASTERING.

NOTES:

- PROPOSED SHOP -1
- PROPOSED SHOP -2
- PROPOSED SHOP -3
- PROPOSED SCRAP YARD
- EXISTING BUILDINGS
- PROPOSED CONCRETE ROAD
- PROPOSED SPEED BRAKER
- PROPOSED BRICK STORM WATER DRAIN
- PROPOSED R.C.C STORM WATER DRAIN

ADVANCE COPY

REV. NO.	DESCRIPTION	DATE	SIGN
	REVISIONS		

CLIENT:
SAME DEUTZ-FAHR INDIA (P) LIMITED,
No. 72M, Sipcot Industrial Complex,
Ranipet - 632 403. Tamil Nadu, India

PROJECT MANAGEMENT:
Cushman & Wakefield Property Advisers Pvt Ltd.,
Prestige Polygon, No. 471, 6th Floor,
Anna Salai, Teynampet, Chennai – 600 018

PROPOSED PLANT EXPANSION

GROUND FLOOR PLAN

DESIGN CONSULTANTS
ARCH PROJECTS CONSULTANTS PRIVATE LIMITED

ADVANCE COPY

DRAWN	Murugavel	DATE	SCALE	PROJ. NO.
CHECKED		03.02.2020	1:200	APC011
DWG NAME	APC-SDF-SH01-AR-AC-101			R5