

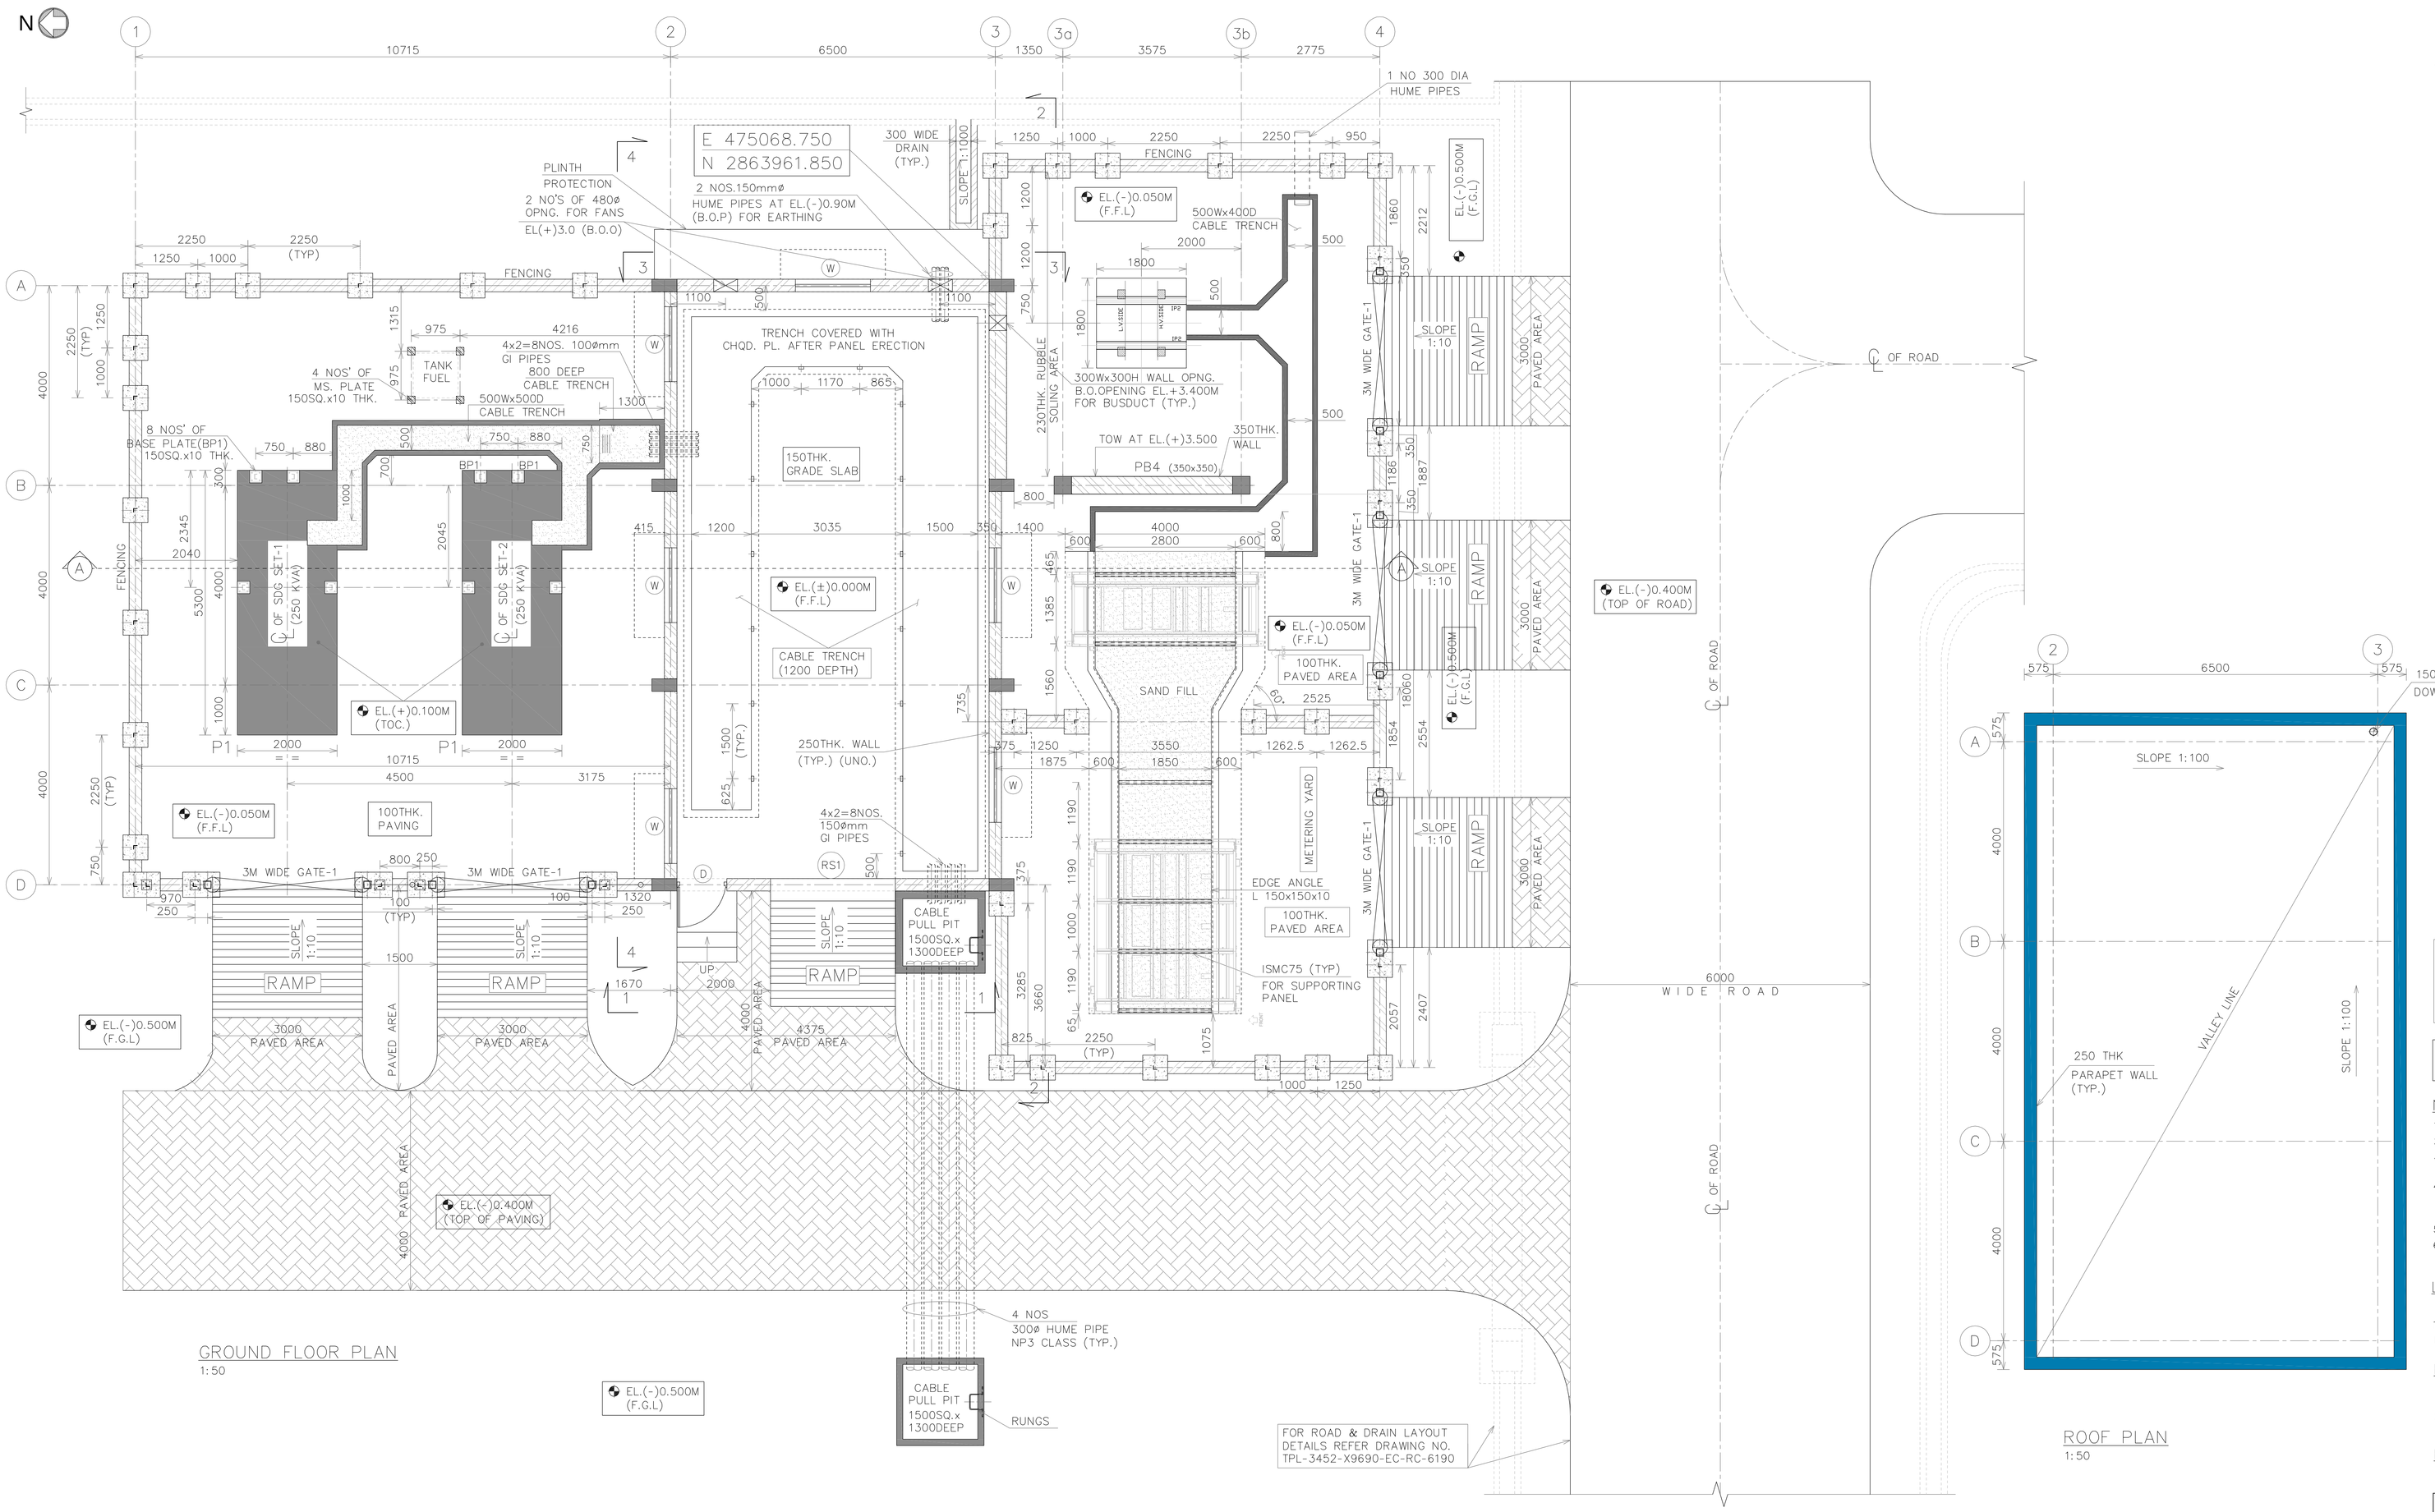


GROUND FLOOR PLAN
1:50

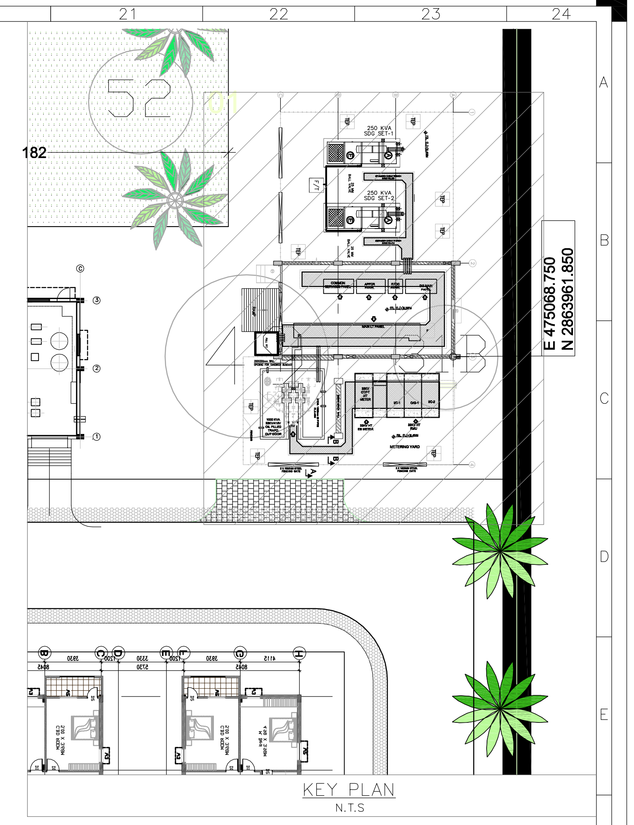

ROOF PLAN
1:50

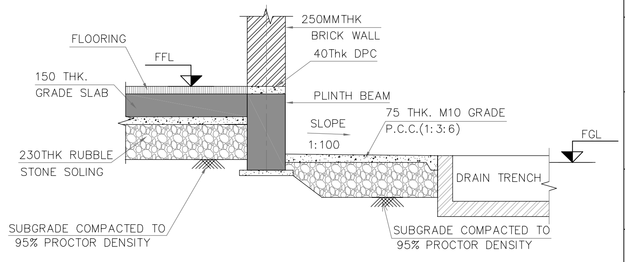

TYP. DETAIL OF PLINTH PROTECTION
1:20

FOR STAIRCASE HANDRAIL, JOINERY, FLOORING PATTERN, COLOR SCHEME DOOR, WINDOW SPECIFICATIONS PLEASE REFER
STANDARD ARCH DETAIL DRAWING - TPL-3452-X9690-EC-AC-6400
DOORS,WINDOWS DETAIL DRAWING - TPL-3452-X9690-EC-AC-6401

SPECIAL NOTES:
COORDINATES TO BE VERIFIED BEFORE SITE CONSTRUCTION.

NOTES

1. ALL DIMENSIONS ARE IN MILLIMETRES AND LEVELS ARE IN METRES, UNO.
2. EL(±)0.000 REFERS TO FINISHED FLOOR LEVEL WHICH CORRESPONDS TO RL 44.30
3. THICKNESS OF ALL THE WALLS SHOWN IN THE DRAWING SHALL BE 250MM IN CM(1:6)
4. ALL DIMENSIONS OF MASONRY WALL, COLUMNS, BEAMS WALL THICKNESS, DOOR/WINDOW/VENTILATOR/ROLLING SHUTTER OR ANY OTHER OPENINGS, ARE SHOWN EXCLUSIVE OF PLASTER,FINISHING OR FRAMES.
5. CLOSURE OF OPENINGS AFTER FAN INSTALLATION TO BE DONE BY CIVIL CONTRACTOR.
6. CABLE TRENCH INSIDE THE BUILDING SHALL BE COVERED WITH 6MM THK CHEQ. PLATE AFTER AERATION OF ELECTRICAL PANELS.

LEGEND

℄	: CENTER LINE	FFL	: FINISHED FLOOR LEVEL
TOC	: TOP OF CONCRETE	FGL	: FINISHED GROUND LEVEL
EL	: ELEVATION	TYP	: TYPICAL

REFERENCE

1. FOR RC DETAILS OF FOUNDATION & COLUMNS REFER DWG NO:TPL-3452-X9690-EC-RC-6348.
2. FOR SECTIONS & ELEVATION DETAILS REFER DWG NO: TPL-3452-X9690-EC-AC-6398 (Sht 2 of 2)

ENGG. REFERENCE

1. ELECTRICAL EQUIPMENT GA FOR TOWNSHIP SUBSTATION -- TPL-340052-X7274-EE-GA-2462.

SCHEDULE OF OPENINGS:

S.NO	DESCRIPTION	MARKING	OPENING SIZE WIDTH	OPENING SIZE HEIGHT	MATERIAL	NO'S
1	DOOR	D	1000	2100	STEEL FRAMED DOORS SINGLE LEAF FIRE RESISTANT DOOR (2 HRS RATING)	1
2	ROLLING SHUTTER	RS1	3000	3000	ROLLING SHUTTER (PARTLY LATHED & PARTLY GRILLED) MECHANICALLY OPERATED	1
3	WINDOW	W	1500	1200	POWDER COATED ALUMINUM FRAMES WITH 6MM THICK GLAZING FIXED WINDOWS	6

FINISHING SCHDULE

FLOORING	
GROUND FLOOR AREA	VDF
WALLS	
INTERNAL WALL & PLASTERING	INTERNAL 125MM THICK BRICK WALL & 15 MM THICK PLASTER WITH SMOOTH FINISH UP TO 3M HEIGHT AND WALL CARE PUTTY
EXTERNAL WALL & PLASTERING	EXTERNAL 250MM THICK BRICK WALL & 18 MM THICK PLASTER WITH SPONZE FINISH
ROOFING	
INTERNAL FINISHING	PLASTERING WITH CM (1:6) AND PAINTING
WATER PROOFING	BRICKBAT COBA WATER PROOFING OR APPROVED EQUIVALENT
RWP	150 mm ø PVC DOWN TAKE PIPES
PAINTING	
EXTERNAL FINISHING	TWO COATS OF WEATHER SHIELD PAINT OF BERGER MAKE OR APPROVED EQUIVALENT
INTERNAL FINISHING	TWO COATS OF PLASTIC ACRYLIC EMULSION OVER A COAT OF PRIMER
COLOR	AS PER OWNER RECOMMENDATION
CHAIN LINK FENCE	
FENCING	GI COATED CHAIN LINK FENCE, 75mm MESH(2.5mm THK.)

AREA STATEMENT:

1.	DG SET AREA	- GROUND FLOOR	-	124.76 Sq.m
2.	SUBSTATION AREA	- GROUND FLOOR	-	87.58 Sq.m
3.	METERING YARD AREA	- GROUND FLOOR	-	126.90 SQ.M

REV.NO.	DATE	REVISION	CIVIL	MECH	ELEC	INST	APPD	DRAWN
			CLEARED					
1	03.03.17	ISSUED FOR CONSTRUCTION	NP				AS	GMN
0	14.02.17	ISSUED FOR APPROVAL	NP				AS	GMN

THIS DRAWING IS PROPERTY OF **"TATA PROJECTS LIMITED"** MUST NOT BE PASSED ON TO ANY PERSON OR BODY NOT AUTHORIZED BY US TO RECEIVE IT NOR BE COPIED OR OTHERWISE MADE USE EITHER IN FULL OR IN PART BY SUCH PERSON OR BODY WITHOUT OUR PRIOR PERMISSION IN WRITING.

EPC CONTRACTOR
TATA PROJECTS LIMITED
H. NO.1-7-80 TO 87, "MITHONA TOWERS – 1"
PRENDERGHAST ROAD, SECUNDERABAD – 500003.

PROJECT TITLE
PLANT FACILITY FOR
MADHEPURA ELECTRIC LOCOMOTIVE PRIVATE LIMITED
AT MADHEPURA, BIHAR.

OWNER
MADHEPURA ELECTRIC LOCOMOTIVE PRIVATE LIMITED

OWNER A/E CONSULTANT :
SEMAC CONSULTANTS PVT LTD
6-1-276, 2ND FLOOR, ARCHANA BLOCK, CONJEEVARAM HOUSE, PADMARAO NAGAR SECUNDERABAD – 500025.

	SIGNATURE	DATE
DRAWN	GMN/MZ	14.02.17
DESIGNED	NP	14.02.17
CHECKED	AS	14.02.17
DEPT.HEAD	AS	14.02.17

RELEASED FOR: INFORMATION; APPROVAL; ENGINEERING; CONSTRUCTION ✓

DWG. TITLE:
TOWNSHIP AREA
ELECTRICAL SUBSTATION BUILDING
ARCHITECTURAL PLANS

DEPT. CIVIL | JOB NO. 0000 | SCALE: – | SHEET: 1 OF 2 | SIZE : A0
FILE NAME. ALSTOM-M-AR-SS-101 | REV./ISSUE
DWG.NO. TPL-3452-X9690-EC-AC-6398 | R1