

SQT.20.21.2723 Dated : 06.10.2020

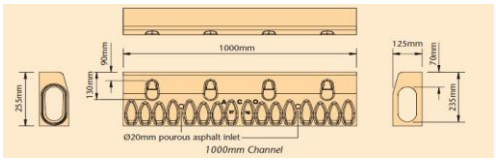


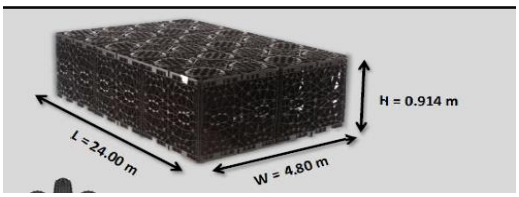
Kind Attn:- Avinash Pharande
Client Name:- SCON Project
Address :- S.NO.116, Hissa No.3/1, 3/3,3/10, Pune- Bangalore Highway, Near Shell petrol Pump, Warje, Pune- 411058

Email Id:- avinashp@sconprojects.com
Contact Details:- 9552002737

Dear Sir,

This is with reference to your requirement of Access Cover , we are pleased to quote, competitive rates for ***NIHVA Technologies Pvt. Ltd*** *authorized associated partner of* ***ACO Systems & Solutions (Germany).*** *We hope you find our quotation in line with your requirement. Looking forward for offering better solutions in drainage system.*

Project : Kerakoll India, Guajrat					
Article No	**Description of Products**		Total Qty	**Project Price Per Nos**	**Amount**
(A)	**Shed Roof Periphery Drains**				
	Supply of ACO HP Vertical Spigot Outlet Art No 105907 Nominal Bore Pipe Size 150 (mm) & Pipe OD (mm) 160 Area Drained‡ (m^2) 787 Flow Rate† 16.4 (l/s) Weight 4.20 Flow rate measured at 35mm head of water over outlet body for outlets up to 110mm diameter and 45mm head for 160mm diameter outlets as per EN 1253-2:2015. ‡ Based on a rainfall intensity of 75mm/hr (0.02083 l/s/m^2). All components to be manufactured from grade LM6 aluminium silicon alloy to BS EN 1706:2010.  		30	22,779	683,363
B	**Proposed new connection area drains - south side area - 42 mtrs.- V100 Multiline Channel + Composite Gratings**				
	Supply of Prefab Polymer Concrete ACO Drain V 100 Multiline Channels as per EN 1433 having following properties a) Compressive strength -96 N/mm2 b) Flexural strength -27N/mm2 c) Water absorption - 0.07% d) Manning's roughness- 0.011. The Channels must be 'V'-profile in shape with integrated edge protection made up of Galvanised Steel ..... with boltless drainlock®grating with anti-shunt 4 no. provision per length. The Channels must also be pre-sloped 1:200 or same invert / variable depth with 500 or 1000 mm length and with tongue and groove joints for interlocking, integrated lip labyrinth sealing for liquid-tight connection to ground line with needed accessories like end cap, end cap with outlet etc. Channels to have anchoring features on the outside wall to ensure mechanical bond to the surrounding bedding material and pavement surface.The Channel Composite Gratings are made up of ductile iron/ Galv. Steel / Stainless Steel 304/PP in 500 mm or 1000 mm length, suitable for polymer concrete drain channels as per load class B-125 confirming to EN 1433. The Channels will have the nominal width of 100 mm and invert depth varying between 150 mm as per design. Art No: 12330		42	5,704	239,558
	    				

C)	**Driveway area drains - south & west side area - 312 mtrs.**			
Supply of Prefab Polymer Concrete ACO Drain V 100 Multiline Channels as per EN 1433 having following properties a) Compressive strength -96 N/mm2 b) Flexural strength -27N/mm2 c) Water absorption - 0.07% d) Manning's roughness- 0.011. The Channels must be 'V'-profile in shape with integrated edge protection made up of Galvanised Steel ..... with boltless drainlock®grating with anti-shunt 4 no. provision per length. The Channels must also be pre-sloped 1:200 or same invert / variable depth with 500 or 1000 mm length and with tongue and groove joints for interlocking, integrated lip labyrinth sealing for liquid-tight connection to ground line with needed accessories like end cap, end cap with outlet etc. Channels to have anchoring features on the outside wall to ensure mechanical bond to the surrounding bedding material and pavement surface.The Channel Composite Gratings are made up of Ductile iron in 500 mm suitable for polymer concrete drain channels as per load class D400/E600 confirming to EN 1433. The Channels will have the nominal width of 100 mm and invert depth varying between 200 mm as per design. Art No: 12350 (Refer the Drawings for Details BOQ)    	312	7,011	2,187,510
D)	**Pathway area drains - east side area - 113 mtrs ACO Kerb Drain 255**			
Supply of Polymer Concrete Kerb Drain Channels as per EN 1433 with following properties. a) Compressive strength -96 N/mm b) Flexural strength -27 N/mm2 c) Water absorption - 0.07% d) Mannings roughness- 0.011. The kerb Channels will be monolithic structure with two 50 mm inlet aperture for drainage per 500 mm length and 25 mm holes for porous asphalt drain with fully certified to D load class as per EN 1433 and CE marked. The Channels will be with groove on the joint for sealing and anchoring features on the outside wall to ensure channels anchoring to surrounding bedding surface. The Channels will be with knock-out provision for connection to pipe. The Channels will have access unit with removable grating and sump unit with removable sludge Basket and Lip labyrinth connection for pipes as per EN-1433. The Channel's nominal width will be 100 mm and total depth 305 mm . Dimensions: 500x 150x255 mm. Art. No: 7950 (refer the BOQ Sheet in Drawings)    	113	18,755	2,119,315
E)	**ACO Strommbrixx SD Systems - Rain Water Harvesting - Two Wheeler Parking Site Areas - Volume 105.41 m³**			
Supply of The ACO StormBrixx® system consists of a single, recyclable, polypropylene body that can be assembled in a variety of ways to form an open bonded structure & tested independently to certify structural integrity and the long term life expectancy.The patented brickbonding and cross bonding feature provides a strong, long life installation and helps improve the construction speed of the tank. ACO StormBrixx® can be configured to minimise silt accumulation and can accommodate a sediment bay or silt trap facility, ensuring the system can be properly maintained throughout its life.Total Volume of Water is design Appox 1.00 Lacs Litre .Total Size Design Strommbrix Systems (L) 24.00 mtr x (W) 4.800 m Meter x (H) 0.914 m .Total Gross Volume Estimated 105.41 m³ and Net Volume 100.14 m³ . Product Details like Strombrixx SD Systems ,SD Panel , Top Cover ,Connector etc as per BOQ attach & Other Accessories Like Geotextile, Membrane ,ACO Double Sided butyl Mastic Tape & Flexible Top Hats as per as Final BOQ Apporved (refer BOQ Sheet Separate attach)  	105.41	37,136	3,914,532
IMP Note : Apart the Installation , Welding of Membrane for Strombrixx , Purchase of Local Company Geotextile Material , Construction Both Side Concrete Tank are in the Contractor Scope (refer the drawings) price is not cover above quote				
Total (Rs.)				**9,144,277**

Note :

1) Qty to be review before the Finalisation of Order

Terms & Conditions :-

1) Transportation Extra as applicable
2) Delivery : 13 -15 Weeks from date of confirmed Purchase Order & advance payment.
3) Taxes : GST 18% Extra
4) Validity : 30 Days from Date of Quotation
5) Installation is in your scope. Our Technician will only guide the installation on site.
6) Unloading of Material at site is in client Scope.
7) Payment Term :- 100 % advance along with Purchase Order

For any further Query please Contact **Mr. Arjun Patil** on 8551096333.

With Best Regards
Shailesh Bhoir
7219206333
For NIHVA Technologies Pvt Ltd