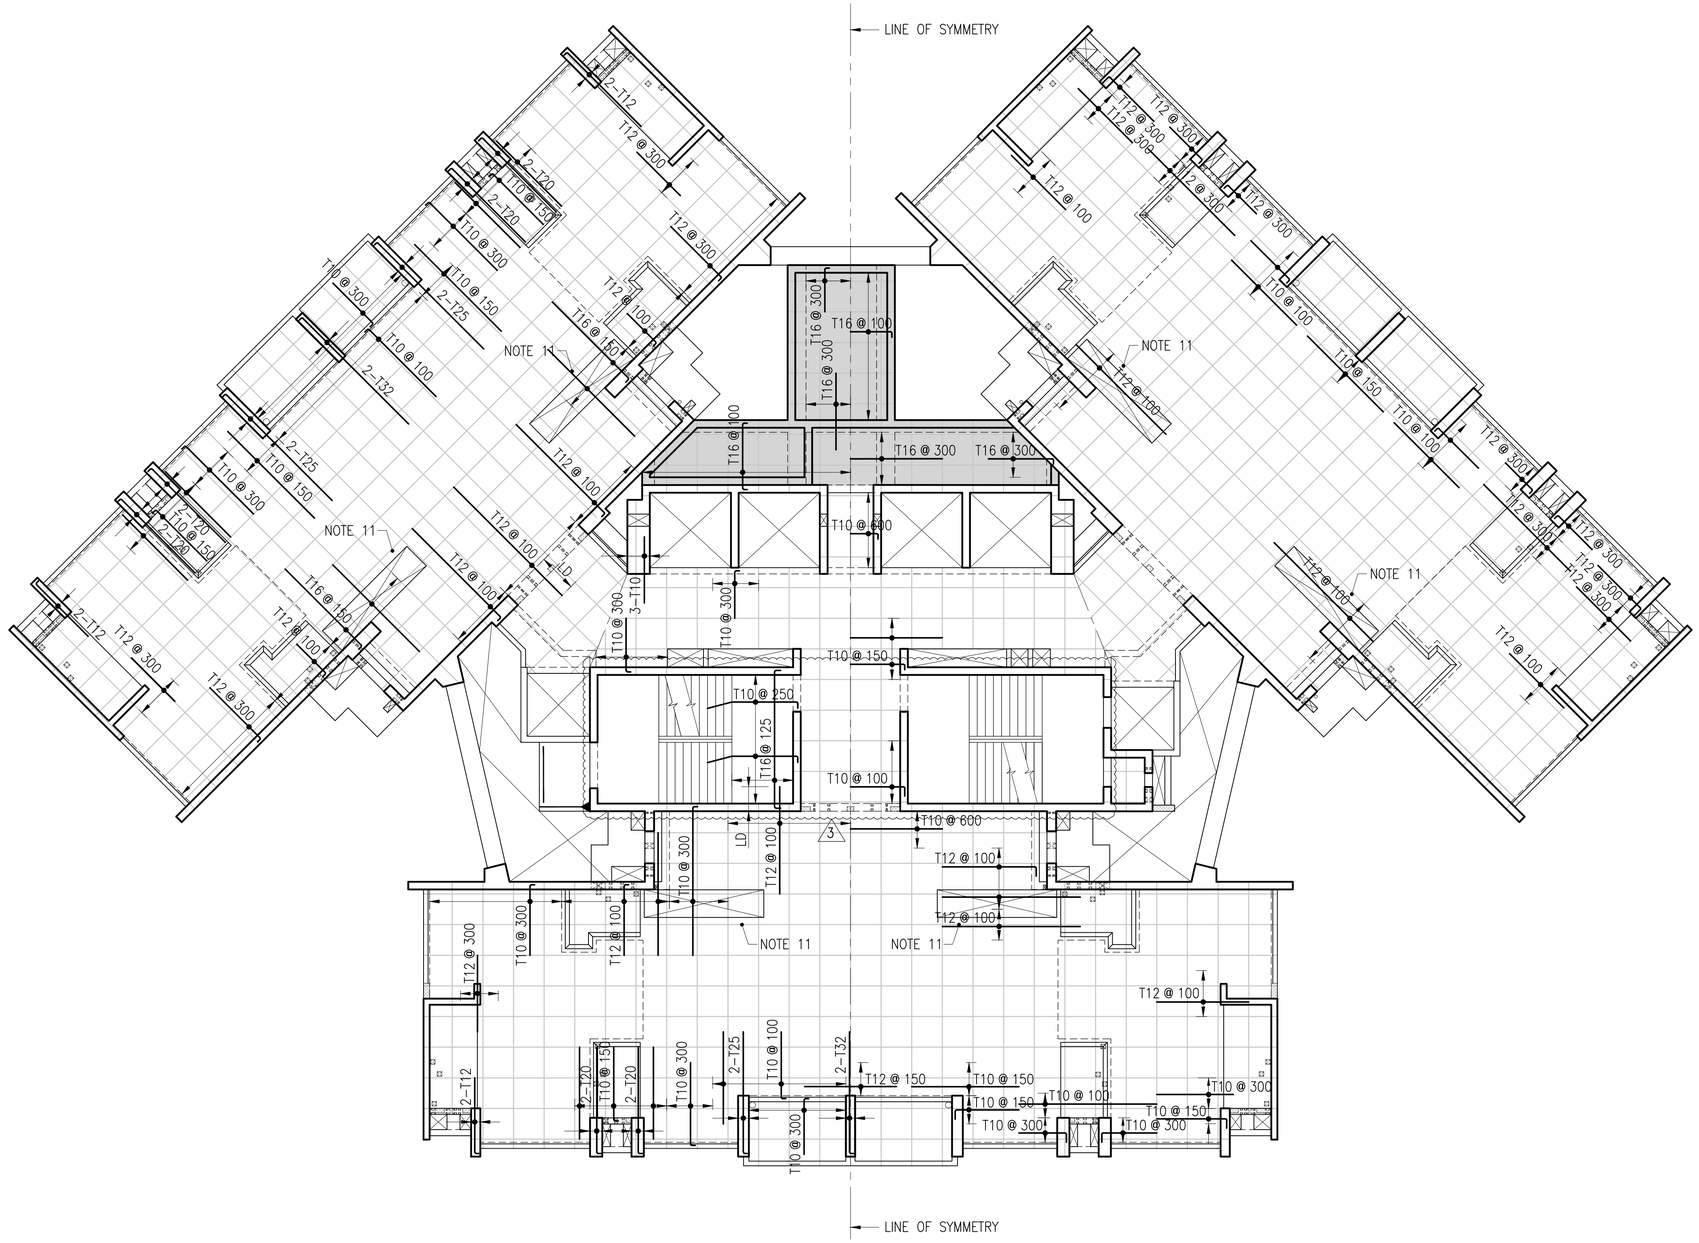


NOTES:


1. REFER TO DRAWING S–129 FOR NOTES & DIMENSIONS.
2. PROVIDE REINFORCING WHERE NOTED IN PLAN AS FOLLOWS:

   T# @ ### – [#]
   - BAR SIZE
   - BAR SPACING
   - TOTAL NO. OF LAYERS
3. WHERE MULTIPLE BAR LAYERS ARE INDICATED, THE LONGEST SHALL BE PLACED AT THE OUTERMOST LAYER.
4. TOP REINFORCEMENT:


   125, 175, 200 THK SLAB – T12 @ 300 BOTHWAYS
   250 THK SLAB – T12 @ 300 BOTHWAYS
   250 THK SLAB (AT DOMESTIC, FIRE TANK AND PUMP ROOM AREA) – T16 @ 300 BOTHWAYS.
5. REFER TO DRAWING S–340 FOR TYPICAL DETAILS.
6. SOLID LINES INDICATE EXTENT OF BARS WITH RESPECT TO 1 METER GRID. BARS END ON GRID OR 500 MM FROM GRIDLINES.
7. PLACE REINFORCEMENT BARS FOR FLAT SLAB IN THE FOLLOWING SEQUENCE, UON:

DIRECTION A	BOTTOM BARS
DIRECTION B	BOTTOM BARS
DIRECTION B	TOP BARS
DIRECTION A	TOP BARS

WHERE DIRECTION A AND DIRECTION B ARE DEFINED AS:

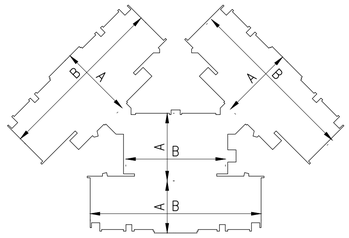

8. PROVIDE REBAR AT GRID TRANSITION AS FOLLOWS:

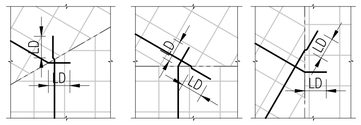

9. REINFORCEMENT ALONG DIRECTION–A SHOWN ON THE LHS OF LINE OF SYMMETRY TO BE PROVIDED ON RHS ALSO.
10. REINFORCEMENT ALONG DIRECTION–B SHOWN ON THE RHS OF LINE OF SYMMETRY TO BE PROVIDED ON LHS ALSO.
11. PROVIDE ADDITIONAL REINFORCEMENT PER "TYPICAL REINFORCING AT SLAB OPENING DETAIL" AT THE PROPOSED STAIRCASE LOCATION
12. INDICATES FIRE, DOMESTIC TANK , PUMP ROOM AREA

LERA

Leslie E. Robertson Associates
Consulting Engineers (India), Pvt. Ltd.
The Ruby, North Wing, 23rd Floor,
29 Senapati Bapat Marg,
Dadar West, Mumbai – 400 028 India
Tel: 91 22 2437 6001 and 91 22 2437 6003

Client

Oberoi Realty Limited
Commerz, 3rd Floor, International Business Park,
Oberoi Garden City, Mumbai – 400 063 India
Tel: +91 22 6677 3333 Fax: +91 22 6677 3334

No.	Revision/Issue	Date
R3	REVISED AS MARKED	27 JAN 23
R2	REVISED AS MARKED	14 FEB 22
R1	REVISED AS MARKED	06 SEP 21
R0	ISSUED FOR CONSTRUCTION	28 JUL 21

Warning:

© Copyright LESLIE E. ROBERTSON ASSOCIATES, CONSULTING ENGINEERS (INDIA), PVT. LTD. IT IS A VIOLATION OF LAW FOR ANY PERSON, UNLESS ACTING UNDER THE DIRECTION OF A PROFESSIONAL, LICENSED IN THE STATE OF THIS PROJECT, TO ALTER IN ANY WAY THESE DRAWINGS. WHERE ANY ITEM IS ALTERED, THE SUPERVISING PROFESSIONAL SHALL AFFIX TO THE ITEM HIS SEAL AND THE INSCRIPTION "ALTERED BY" FOLLOWED BY HIS SIGNATURE, THE DATE, AND A SPECIFIC DESCRIPTION OF THE ALTERATION.

Professional Stamp:

Phase:
GOOD FOR CONSTRUCTION

Project Title:
MAXIMA

Drawing Title:
FLOOR PLAN
29TH LEVEL
TOP REINFORCEMENT PLAN

Drawn:	Design:
LERA	LERA
Check:	Date:
LERA	28 JULY 2021
Scale:	Project Number:
1:100	P 992

Sheet:
S-129.T