

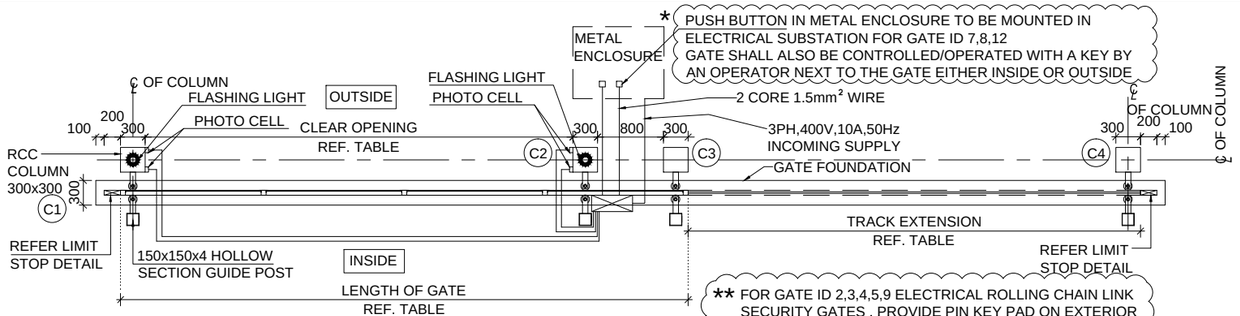



SLIDING GATE PLAN OPEN POSITION

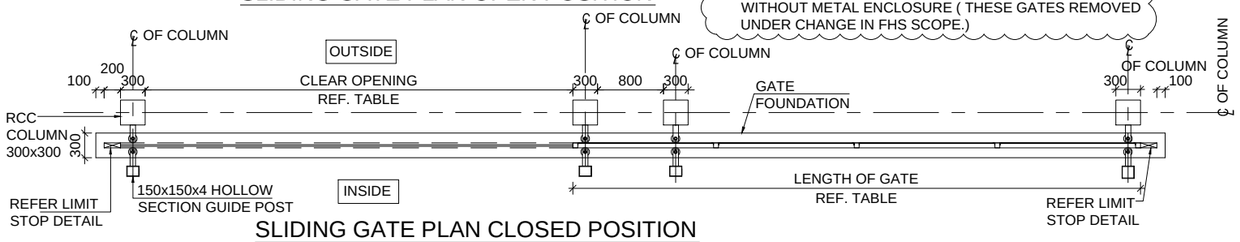


SLIDING GATE PLAN CLOSED POSITION

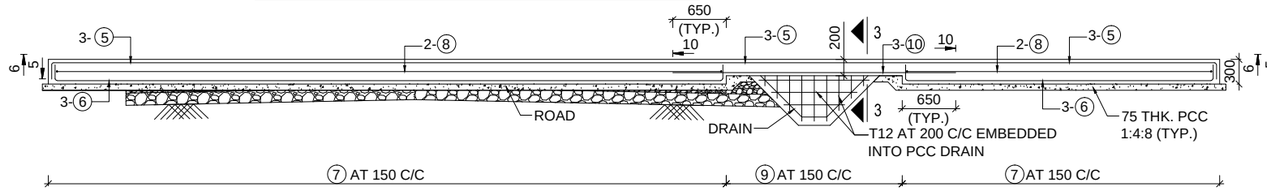


TYP. RC. DET. OF GATE FOUNDATION OVER DRAIN CROSSING

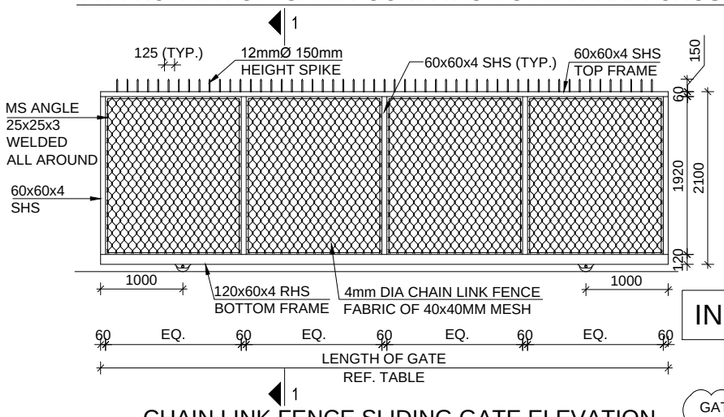


CHAIN LINK FENCE SLIDING GATE ELEVATION




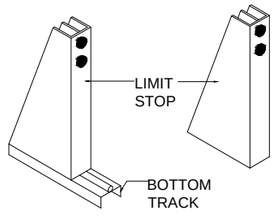

INPUT TO VENDOR




GATE ID 2, 3, 4, 5 & 9 ARE REMOVED UNDER CHANGE IN FHS SCOPE

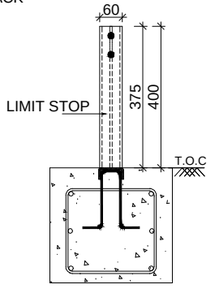


LIMIT STOP DETAILS


SCHEDULE OF ELECTRICAL ROLLING CHAIN LINK FENCE GATE'S

GATE ID	CLEAR OPENING (mm)	TRACK EXTENSION (mm)	LENGTGH OF GATE (mm)	COLUMN LOCATION				T.O.C OF FOUNDATION	REMARKS
				CENTRE OF COLUMN -C1		CENTRE OF COLUMN -C4			
				NORTH	EAST	NORTH	EAST		
2	10200	10500	11900	3178519.993	730749.958	3178498.045	730752.545	+214.450	
3	10200	10500	11900	3178488.033	730668.042	3178509.978	730665.428	+214.450	REMOVED UNDER CHANGE IN FHS SCOPE
4	11400	11700	13100	3178546.831	730635.554	3178522.503	730641.541	+214.300	
5	9300	9600	11000	3178539.492	730456.457	3178541.739	730476.633	+214.300	
7	7600	7900	9300	3178673.720	730106.016	3178690.620	730106.016	+214.000	
8	5800	6100	7500	3178735.107	730106.516	3178748.420	730106.516	+214.000	
9	10400	10700	12100	3178518.916	730638.878	3178496.574	730641.541	+214.300	REMOVED UNDER CHANGE IN FHS SCOPE
12	11200	11500	12900	3178763.159	730114.773	3178763.159	730090.673	+214.000	

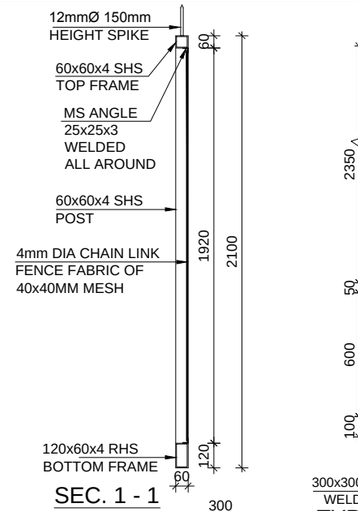


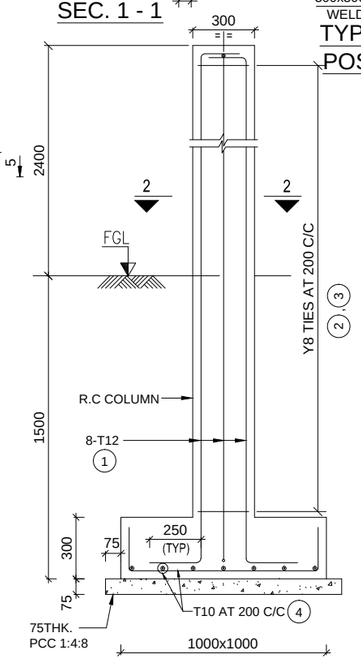


COLUMN / FOUNDATION DETAIL

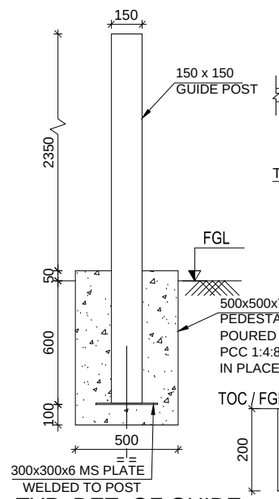


TYP. DET. OF GUIDE POST FOUNDATION

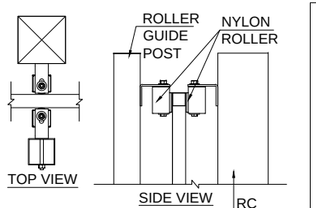

ROLLER DETAILS

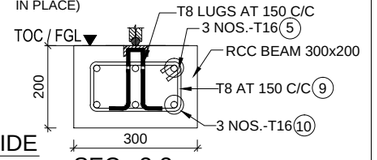

SEC. 3-3

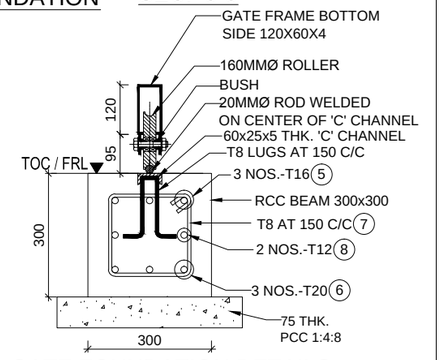

GATE FOUNDATION DETAILS

LEGEND:

FGL - FORMED GROUND LEVEL
FRL - FINISHED ROAD LEVEL
SHS - SQUARE HOLLOW SECTION
RHS - RECTANGULAR HOLLOW SECTION
T.O.C - TOP OF CONCRETE

ITR	
Rathnavel	09/02/15
NAME	DATE

DESIGNER OF RECORD	
JOHN SOLDEEP	09/02/2015
NAME	DATE
L&T CONSTRUCTION	

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS AND LEVELS ARE IN METERS.
2. GRADE OF CONCRETE SHALL BE M35.
3. CLEAR COVER TO REINFORCEMENT SHALL BE 40mm FOR GATE FOUNDATION AND 40mm FOR COLUMN.
4. T-DENOTES HIGH YIELD STRENGTH DEFORMED BAR HAVING YIELD STRENGTH NOT LESS THAN 500 N/sq.mm. CONFORMING TO IS:1786-2008.
5. ALL STRUCTURAL STEEL SECTIONS / PLATES SHALL BE OF GRADE 250 MPA CONFIRMING TO IS: 2062-2006.
6. HOLLOW SECTIONS SHALL BE OF GRADE 310 MPA CONFIRMING TO IS: 4923-1997.
7. FOR LAYOUT OF ROAD, FENCE & GATES REFER DWG. NO. O12205-C-DP-03-RD-0010 & 0011, O12205-C-DP-03-RD-0023 TO 0028, O12205-C-DP-03-RD-0044 TO 0073.
8. FRL / FGL SHALL BE LOCALLY MATCHED WITH T.O.C OF FOUNDATION .
9. DETAILS SHOWN ARE FOR PREPARING SHOP DWG. WHICH MAY SUBJECT TO CHANGE AS PER VENDOR STANDARD DETAIL IN CONSULTATION WITH CLIENT.

CHECKED BY	SIGN	DATE	CHECKED BY	SIGN	DATE	CHECKED BY	SIGN	DATE
ARCHITECTURE		09.02.15	HVAC		09.02.15	GIS		
CIVIL & STRUCTURAL		09.02.15	FPS		09.02.15	GEOTECH.		
ELECTRICAL		09.02.15	PIPING					
ELV SYSTEM		09.02.15	PHE		09.02.15			

US Army Corps of Engineers®
ALASKA DISTRICT

MARK	DESCRIPTION	DATE	APPR.
D	ISSUED FOR 100% FORMAL SUBMISSION	09.02.2015	RBS
C	ISSUED FOR 100% FORMAL SUBMISSION	21.01.2015	RBS
B	ISSUED FOR 100% FORMAL SUBMISSION	15.10.2014	RBS
A	ISSUED FOR 100% CLIENTS APPROVAL	25.06.2014	SB

This drawing is the property of L&T Construction. B&E-EDRC, and must not be passed on to any person or body not authorised by us to receive it nor be copied or otherwise made use either in full or in part by such person or body without our prior permission in writing.

DSGN. BY:	PAKR	23.06.2014
DRWN BY:	MSRK	24.06.2014
CHKD BY:	RJS	25.06.2014
APPD BY:	SB	25.06.2014
SIZE: A2	REV: D	PLOT SCALE: 1:50,1:20,1:10

PRIME CONTRACTOR: BOEING INTERNATIONAL CORPORATION INDIA PVT. LTD

L&T Construction Buildings & Factories

PROJECT: C-17 BEDDOWN FACILITIES- HINDAN AFS
TITLE: EXTERNAL DEVELOPMENT NUM. & RC. DETAILS OF ELECTRICAL ROLLING CHAIN LINK FENCE GATES

DRAWING NO. O12205-C-DP-03-NR-0180

REFERENCE NO. **03-C-0180**
SHEET OF

FEBRUARY 09, 2015 100%