NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

NIHVA Sales Quotation

Tox Pressotechnik India Pvt.Ltd.
Gat No. 343, Survery No.7/8/9/10, Village: Ambadvet
Pune -Paud Road
At Post Paud, Taluka- Mulshi, Dist. Pune- 412108

Date : 28.09.2019
Quote NO : SQT.19.20.2122
Kind Attn : Mr.Nilesh Balpande
Email Id : NBalpande@tox-in.com
Contact No: 9552576986

Project Name & Location: Tox Pressotechnik India Pvt.Ltd. Pune

Subject : Quotation for High Speed Door, Sectional Door, Dock Leveler

Dear Sir,

Thank you for your opportunity and trust shown on "NIHVA" your preferred partner for innovative solutions. This has reference to your above mentioned requirement, please find below our Solutions.

Sr. No	Description	Pages
A.	Commercial Offer	1
B.	Technical Specification	2 , 3
C.	General Conditions	4
D.	Terms & Condtions	4

A) Commercial Offer

Sr No	Description	Size		Qty	Supply Charges in INR		Installation Charges in INR	
		Clear Width (mm)	Clear Length (mm)	(Nos)	Unit Price	Total Amount	Unit Price	Total Amount
1	**Rapid Roll Up Door RR 300 + AL**	4000	4000	2	6,32,000	12,64,000	20,000	40,000
2	**Automatic Sectional Doors**	4000	4000	2	3,04,000	6,08,000	20,000	40,000
3	**NIHVA Hydraulic Dock Leveler Capacity 6 Ton**	2000	2500	1	2,02,000	2,02,000	20,000	20,000
4	**NIHVA Edge Dock Leveler Capacity 6 Ton**			1	74,500	74,500	12,000	12,000
				Total		**21,48,500**		**1,12,000**
5	P&F Charges			3%		**64,455**		
	Total Without Taxes					**22,12,955**		**1,12,000**
	GST Extra @ 18%			18%		3,98,332		20,160
	Total With Taxes					**26,11,287**		**1,32,160**
6	Transportation Charges					**In Client Scope**		
7	Unloading Charges @ Site					**In Client Scope**		

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

B) Technical Specification

A) High Speed Door Internal Application





Sr. No	Description	Specifications
1	Description	Flexible High Performance Door, opening in vertical direction for interior use in wind-protected areas
2	Side frames	Made of aluminum
3	Wind resistance	Class 1 (EN 12424)
4	Bottom profile	Anodized aluminum
5	Drive unit	Hollow shaft gear motor with operating current brake
6	Protection	IP 55
7	Control system	MCC Vector Control - frequency converter control system for a dynamic, smooth door movement, located close to the drive unit. Max. Opening Speed 2.2m/s Max. Closing Speed 0.9 m/s
8	Supply voltage	3L(N)PE/380/400/415/440/480V;50/60Hz
9	Safety devices	• Electrical safety contact edge • Evaluation via integrated cable chain • Door line photocell in the side frames • Drop down protection by integrated balancing system
10	Manual activation	By releasing the brake at ground level. Depending on width/height ratio the door opens up to max. 2.0 m

Optional Accessories


Sr. No	Description	Specifications
1	Radar Sensor 	An infrared sensor above the door detects an object (person, vehicle) within a specified distance from the door and opens the door automatically. This is an ideal solution for frequent vehicle or personal traffic.
2	External push button box 	Used for opening & closing of door. Installed on the inside or outside wall beside the door
3	Pull-rope switch 	Pulling the rope opens the door. Installed on the inside construction above the door A pull-rope switch above the door opening can be operated from e.g. a forklift truck.

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

B Dock Leveler

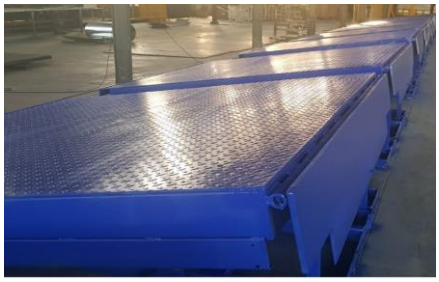



Sr. No	Description	Specifications
1		NIHVA
2	Required Capacity	10 Ton
3	Hydraulic Power pack	1 HP, 3PH
4	Control Panel	4 Push Button operated
5	Deck operation	By push button Deck UP & Deck Down
6	Lip operation	By push button Deck UP & Deck Down
7	Loading platform height from road Level	4 feet (1200 mm)
8	Travel above from Dock level height	350 mm
9	Travel below from Dock level height	200 mm
10	Deck platform size	2000mm (W) x 3000mm (L)
11	Lip sizes	400 mm
12	Clear Pit dimensions	2040mm (W) x 3000mm (L) x 485mm (H)
13	Drive type	Direct by electric Motor
14	Power Consumption	0.75 kw Motor
15	Degree of protection for motor	IP 55
16	Motor RPM	1410 rpm
17	Pump design flow	1.8 LPM
18	Pump pressure	200 bar
19	Safety valve set pressure	90 bar
20	Pump type	Gear
21	In built safety valve	Yes
22	Volume of oil receiver	8 Ltr
23	No of Deck Cylinders	2 Nos
24	Deck Plate Thickness	8 mm Chequered Plate
25	No of Lip Cylinders	1 No
26	Lip Plate	16 mm Thick Plate
27	Dock Bumpers	1 Pair included

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company


GST Pune : 27AAECN0437H1ZM

B) Technical Specification

NIHVA ASSA ABLOY Sectional Door



OH1042P



Vertical Lift
(head room > 2 x height)

Sr. No	Description	Specifications
1	Model No	Crawford Brand
2	Vision Windows	2 Nos at central panel
3	Opening Direction & Mounting	Vertical
4	Door produced Based on which certification	Doors produced according to ISO 9000 or ISO 14000 certified.
5	Opening/Closing Speed	0,28 m/s
6	Door Material	GI Steel
7	Panel Thickness	42mm
8	Panel colour	RAL 9002 Powder coated
9	External surface of the panel	diamond grid design with a glossy finish at the section joints.
10	inside surface of the panel	Monolithic surface on the inside of the door
11	Broken cold bridge	Section joints with broken cold bridges
12	Panels are euipped with ?	Panels to have integrated steel reinforcement for fixation of hinges and hardware.
13	Door sealent	All door sealants made of EPDM rubber, temperature resistant -30/+70
14	All Panel height	All panels should be 545mm high
15	Panel Inside insulation metrial	Insulation material to be CFC free polyuretane foam.
16	Panel Flame Retardent standrad	Flame retardant polyurethane foam according DIN4102-class B2.
17	Steel component Material	All steel components to be electro galvanized
18	Hinge Material	Glass fibre reinforced Polyamide
19	Spring Material surface finish	Powder coated
20	Spings transport till plant	Pre tensioned spring package
21	Water Penetration	EN 12425 class 3
22	Air Permealibity	EN12426 class 3
23	Wind Load	EN21424 class 3
24	Thermal Transittance	EN 12428 1.10W /m2K
25	Bottom sealing	Bottom of the door to be equiped with three lip sealing made of oil resistant EPDM rubber
26	Door saftey device 1	Doors equiped with spring break device
27	Door saftey device 2	Door equiped with pneumatic safety edge
28	Door saftey 3	Having hinges flush with the inside door surface is a safety feature that eliminates the risk of things or people getting caught by parts protuding from a moving door
29	Incase of Power failuer	Doors to be equiped with quick release fuction
30	Operator power conumption	Operator to have a maximum power consumption of 0,37kW and a standby consumption of Maximum 15W
31	Drive Unit & Mounting Type	Single phase 230V direct drive on shaft
32	Emergency Operation	by Disengagement rope manual
33	Operating Switch	Up/Down Keypad + stopbutton
34	Environmental Green Product Declaration Certification	as per ISO 14025 and EN 15804

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

C) General Conditions

1 Installation will start after receiving of Site Readyness Photographs or written Email communication.

2 We will mobilize the Installation Team in 3 - 4 working days, after reciept of Site Readyness Confirmation

3 For any reason if we need to stop our Installation and demobilize the Team without completing the Work, then extra cost will be applicable for Remobilizing the Team.

4 If Lifting Equipements are in NIHVA Scope, then those will be used for Installation purpose only and not for any other works.

Note: Please find below List which are in Client Scope

Sr. No	Description	Remark
1	Secured and fully covered Store area to keep the material	In Client Scope
2	Scaffolding/Hydra/Crane/Forklift etc - Required for Installation at Site	In Client Scope
3	Electrical Supply on the site single phase/three phase points at different places.	In Client Scope
4	Any civil / masonry/structural work required	In Client Scope
5	All structure support required	In Client Scope
6	In Case of any changes in the layout as per site requirements after the shipment of material , the additional quantities and the wastage.	In Client Scope
7	Conduits, Cables required	In Client Scope

D) Terms & Conditions

Price : Ex Works Pune

Delivery : 6 - 7 weeks for Dock Leveler, 11-12 Weeks for Sectional Door from the date of receipt of confirmed purchase order, Advance Payment & Drawing approval.

Payment : 80% Advance along with Confirmed Purchase Order & Balance before dispatch.

Validity : Validity of Offer is 15 days from the date of quotation

Warranty : 12 months from the date of supply.

For any further Clarification /Information in this Concern, Please feel free to Contact **Mr. Ravindra Kharat on 7410169333**

With Best Regards
Varsha
8551091333
For NIHVA Technologies Pvt Ltd