


DOCK LEVELER SIZE	WIDTH (W)	LENGTH (L)	HEIGHT (H)	LIP (C) LENGTH	BUMPER SIZE
	2200	3000	550	400	250X330X100


PIT DIMENSION	WIDTH (W 1)	LENGTH (L 1)	DEPTH (D)	ALL DIMENSIONS ARE IN mm
	2240	3000	555	

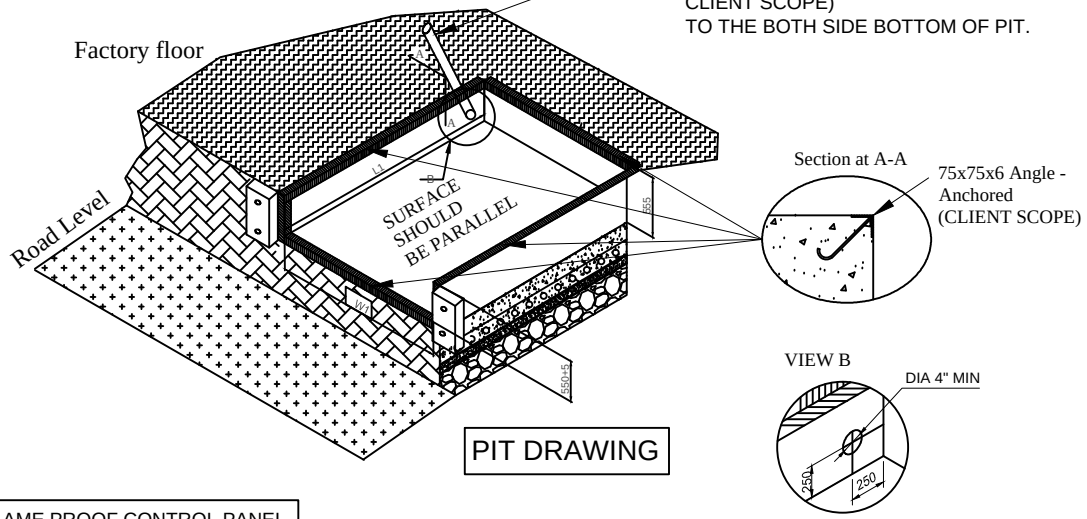

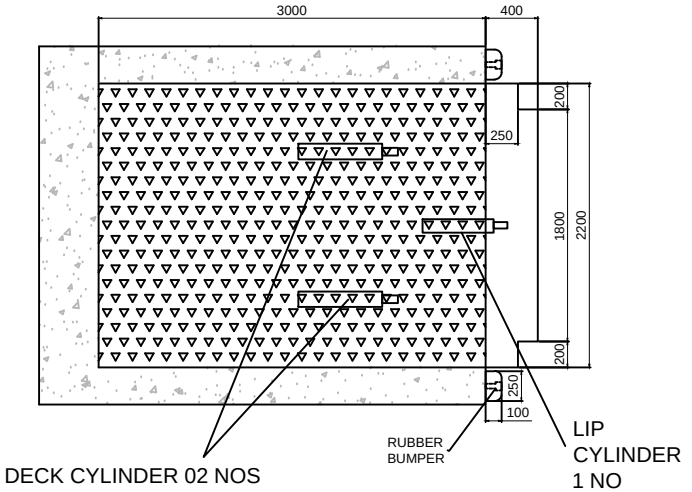

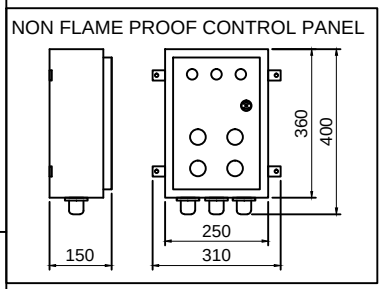

SR.NO	COLOR RAL CODE	COLOR RAL SHADE	APPROVE
2	RAL 5002	ULTRA MARINE BLUE	
1	RAL 1004	GOLDEN YELLOW (DECK) BLACK (BOTTOM SIDE)	

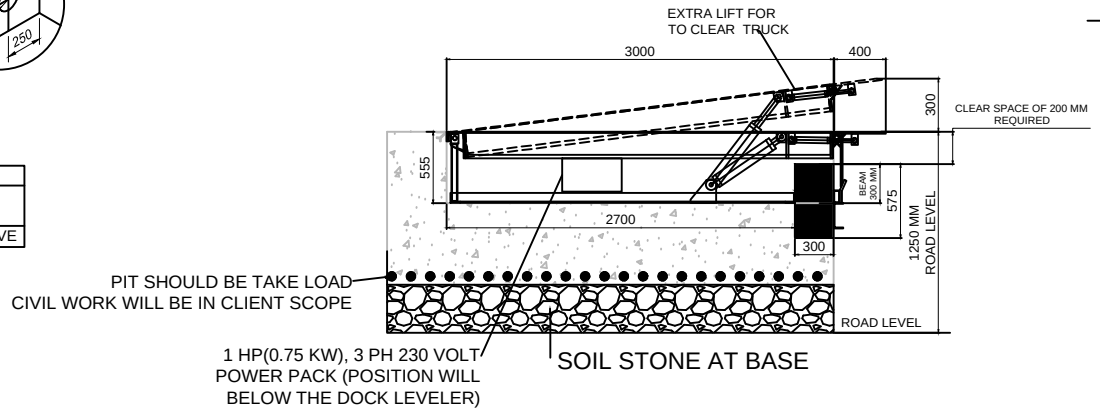

NOTE: -
1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE CONTROL PANEL POSITION.
3. CABLE FROM POWER PACK TO CONTROL PANEL LENGTH IS 7000 MM.(NIHVA SCOPE)
4. MAIN SUPPLY CABLE IS IN CLIENT SCOPE. (4 CORE X 2.5 SQ. MM).
5. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 20000 KGS FLOOR LOAD.
6. FABRICATION TOLERANCE FOR PLATFORM SIZE WILL BE + 10 MM
7. SAFETY FEATURES : DOCK BUMPER IS PROVIDED FOR PROTECT DOCK FROM DIRECT VEHICLE IMPACT.

DOCK LEVELER- 15 TON CAPACITY - 04 NOS

IMP NOTE: -
1.PLEASE NOTE THAT THE CAPACITY OF DOCK LEVELER CONSIDERED IS THE CAPACITY AFTER THE LIP IS RESTED ON THE VEHICLE.
2.CYLINDERS PROVIDED ARE INTENDENT TO BE USED ONLY FOR LIFTING OF BARE DOCK & CAN NOT LIFT OTHER LOADS.

TOLERANCE :- ± 10mm

CONSULTANT NAME : SPECTRUM PHARMATECH CONSULTANT PVT LTD.

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE: DOCK LEVELER

	NAME	SIGN	DATE
DRAWN	P.V.A		12.06.2019
CHECK	V.M.T		12.06.2019
APPRD.			

If any queries contact : design@nihva.com

ALL DIMENSION ARE IN mm

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Website:- www.nihva.com
Tel : 020 66304033
Email:- info@nihva.com

CLIENT - MYLAN LABORATORIES LTD
PROJECT - CENTRAL WAREHOUSE
SITE LOCATION - BANGLORE
DWG. NO. : NIHVA/19-20/0027 | REV- 00
SCALE: NTS | WT: | SHEET: 01 OF 01