

DRAWING :

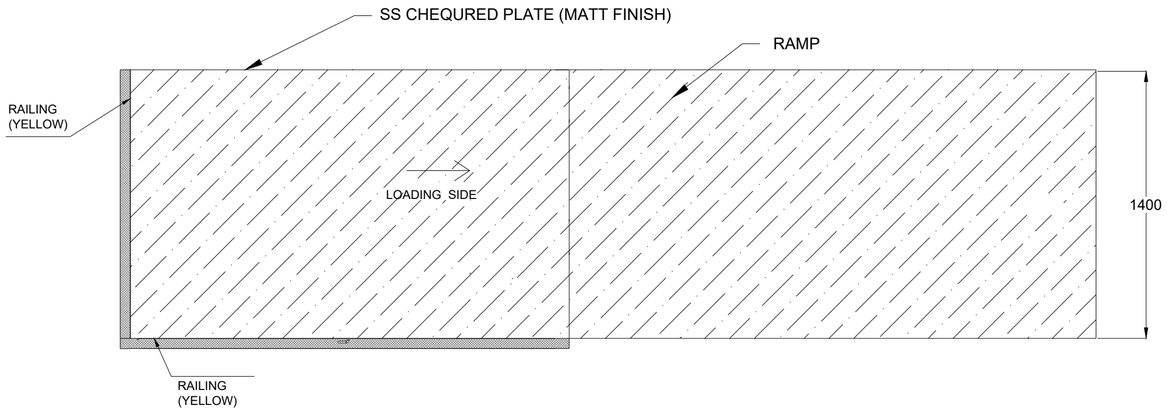

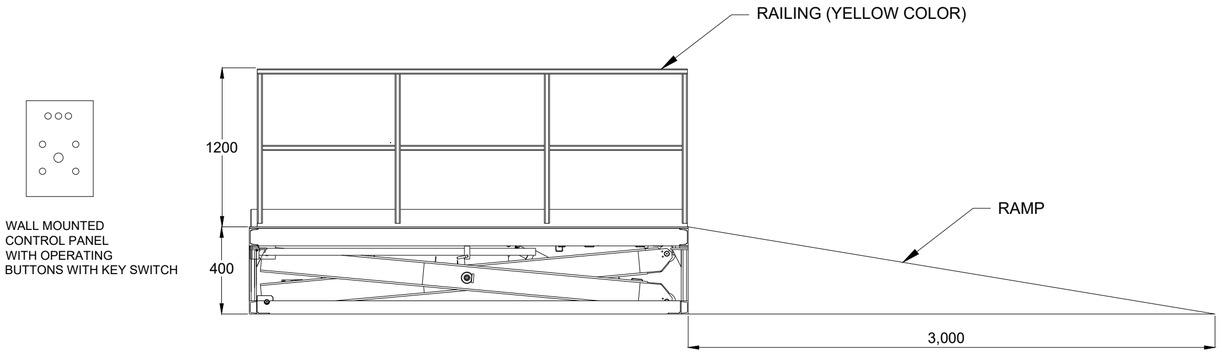

SR.			SR.		
1.	OVERALL LENGTH	2,000 MM	31.	MOUNTING	FLOOR
2.	OVERALL WIDTH	1,400 MM	32.	ACCESORIES	1.ALL SIDE BELLOW
3.	OVERALL HEIGHT	1,300 MM			2.OVER LOAD PRO TECTION WITH SIRON
4.	PLATFORM LENGTH	2,000 MM			
5.	PLATFROM WIDTH	1,400 MM			3.INTERLOCKING - THREE POTENTIAL FREE CONTACT
6.	TOP CHEQURED PLATE	5 MM (SS304) MATT FINISH			
7.	CAPACITY	2000 KG	33.	BOTTOM RAMP COLOR	BLACK (RAL 9005)
8.	LOADING TYPE	STANDARD	34.	RAILING COLOR	YELLOW (RAL 1007)
9.	MOC	MS	35.		
10.	CLOSED HEIGHT	400 MM	36.		
11.	LIFT HEIGHT	1250 MM			
12.	OVERALL LIFT	1650 MM			
13.	SCISSORS	SINGLE			
14.	RAILING TYPE	REMOVABLE Ø30 (MS)			
15.	RAILING HEIGHT	1200 MM			
16.	RAILING SIDE'S	TWO SIDES			
17.	TOE GAURD	YES			
18.	POWER PACK TYPE	STD			
19.	POWER PACK LOCATION	RH SIDE			
20.	HP	5 HP			
21.	PHASE	3 PHASE			
22.	PENDENT TYPE	LOOSE			
23.	PENDENT QTY	1 NOS			
24.	PENDENT LOCATION	ON RAILING			
25.	PANEL SPECS	5 HP			
26.	PANEL LOCATION	ON POWER PACK			
27.	PANEL TYPE	3 PHASE STD			
28.	SUPPLY HOUSE	3.5 M			
29.	CABLE	5 M			
30.	FINISH COLOR	YELLOW / BLACK			

REVISION:	DATE:
REV 01 - 1.RAILING HEIGHT CHANGES 900 MM TO 1200 MM 2.PUSH BUTTON POSITION 3.ADD RAMP SIDE RALING	13-03-2026
REV 02 - 1.RAMP & SCISSOR LIFT WIDTH CHANGES 1200MM TO 1400MM 2.RAILING FIXATION CHANGES. RAILING FIXATION SHOULD BE ON SIDE WISE. 3.LOADING SIDE RAILING CANCELED	25-03-2026

NOTE.:

CLOSE VIEW

This drawing & design is the property of NIHVA TECHNOLOGIES PVT. LTD. Not to be sold or copied to any other concern

TITLE - SPM

DWG NO-NTPL-000-PM-01

NIHVA TECHNOLOGIES PVT.LTD. PUNE
WEBSITE - www.nihva.com

	NAME	SIGNATURE	DATE
DRAWN	V.W.		09-03-2026
CHK'D	B.S.		10-03-2026
APPV'D	V.T.		10-03-2026

PRODUCT :SCISSOR LIFT

DWG: NTPL-000-PM-01 | REVISION :

LOCATION : DUBAI | WEIGHT :

MATERIAL : | QTY : 01 NO'S

If any queries contact:design@nihva.com

ALL DIMENSIONS ARE IN MM | A2

PROJECTION METHOD | SCALE :

SHEET 1 OF 1