


DOCK LEVELER SIZE	WIDTH (W)	LENGTH (L)	HEIGHT (H)	LIP (C) LENGTH
	2500	2500	480	400


PIT DIMENSION	WIDTH (W 1)	LENGTH (L 1)	DEPTH (D)	ALL DIMENSIONS ARE IN mm
	2540	2550	485	

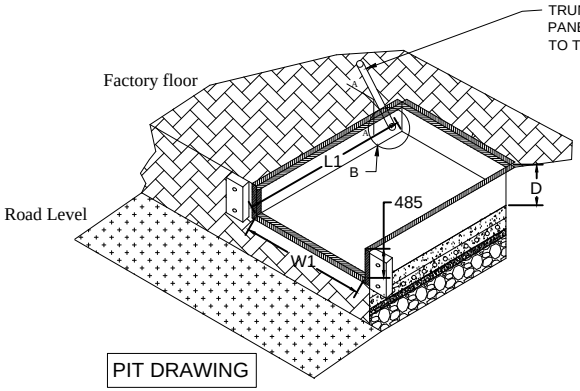


PIT DRAWING





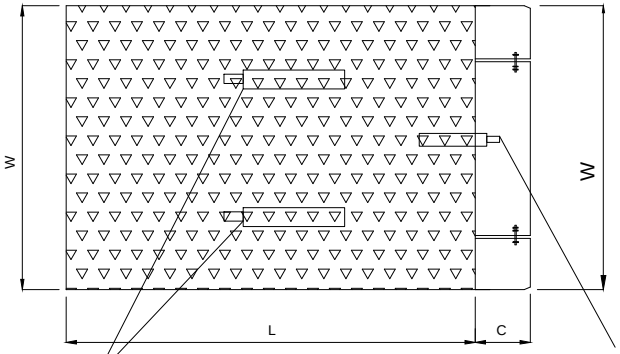

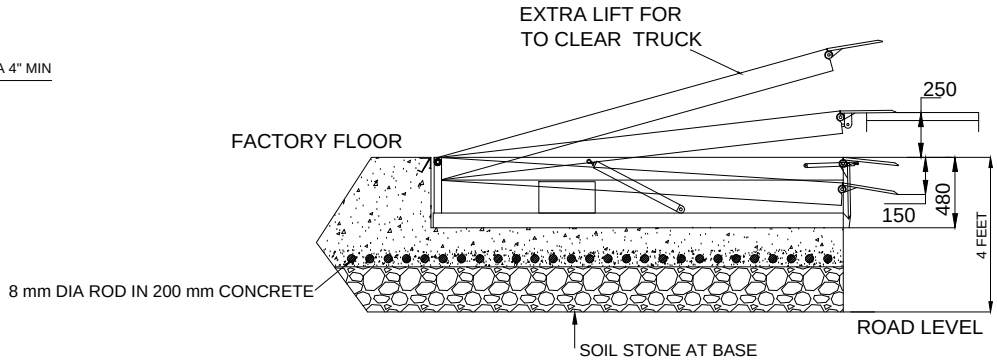

DOCK LEVELER- 6 TON CAPACITY

NOTE: -

1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY CABLE LENGTH STD. 7000 MM)
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 10000 KG FLOOR LOADING
4. MOUNTING ARRANGEMENT FOR BUFFERS SHOULD BE MADE AS PER BUFFER DRAWING (IF ORDERED)
5. FABRICATION TOLERANCE FOR PLATFROM SIZE WILL BE ± 15 MM

REV 01(21-04-2018) - Dock leveler capacity changed from 2.5MT to 6MT.

CLIENT APPORVAL-	DATE	SIGN.
DRAWN :- OMKAR	27/03/2017	
CHECKED :- P.A.	27/03/2017	
APPROVED :- P.A.	27/03/2017	
ALL DIMENSION ARE IN mm		
If any queries contact : design@nihva.com		

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT - Mastpro Consulting Engineers Pvt.Ltd.	
PROJECT - Mars Internationals	
SITE - Khed,city	
DWG. NO. - NIHVA/17-18/0403/R01	REV-01