


DOCK LEVELER SIZE	WIDTH (W)	LENGTH (L)	HEIGHT (H)	LIP (C) LENGTH	BUFFER SIZE (OPTIONAL)
	2500	3000	550	400	200X300X100


PIT DIMENSION	WIDTH (W 1)	LENGTH (L 1)	DEPTH (D)	ALL DIMENSIONS ARE IN mm
	2550	3000	560	

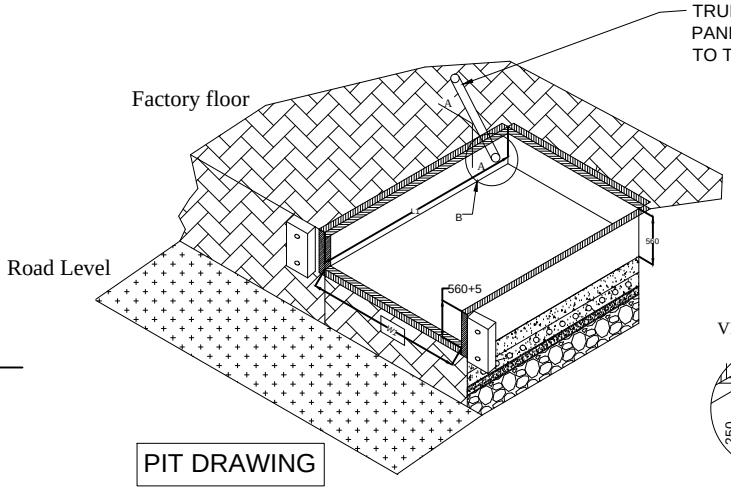


PIT DRAWING

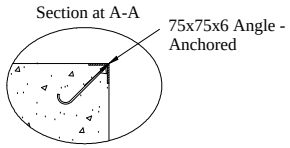



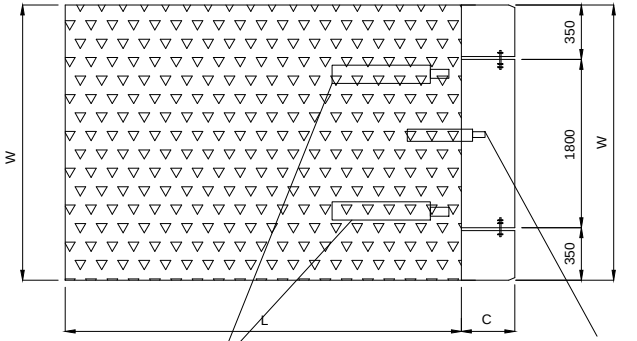

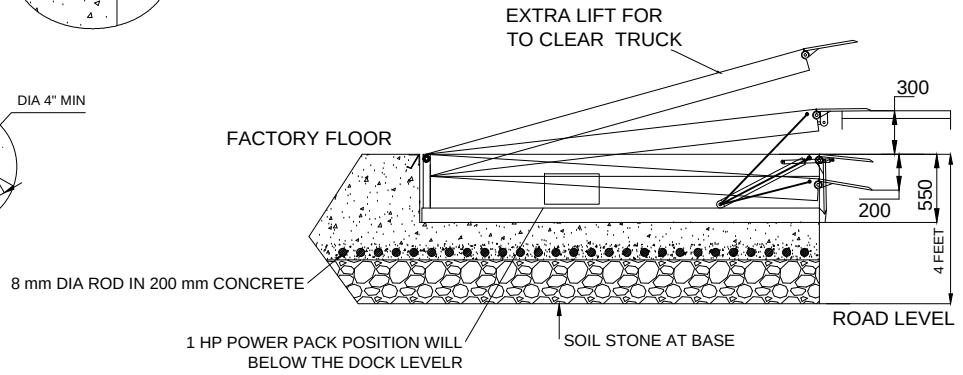

TOLERANCE - ± 10mm

NOTE: -
1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY CABLE LENGTH STD. 5000 MM)
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 18000 KGB FLOOR LOADING
4. MOUNTING ARRANGEMENT FOR BUMPERS SHOULD BE MADE AS PER BUMPER DRAWING (IF ORDERED)
5. FABRICATION TOLERANCE FOR PLATFROM SIZE WILL BE ±10 MM

DOCK LEVELER- 15 TON CAPACITY -

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE: DOCK LEVELER

	NAME	SIGN	DATE
DRAWN	P.A		03.08.2018
CHECK	S.L		03.08.2018
APPRD.	R.D		03.08.2018

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT - M/S. BHOGADE INFRA.
PROJECT - G.E
SITE LOCATION - CHAKAN III
If any queries contact : design@nihva.com
DWG. NO. : NIHVA/18-19/0091 | REV- 0
ALL DIMENSION ARE IN mm
SCALE: NTS | WT: | SHEET: 01 OF 01