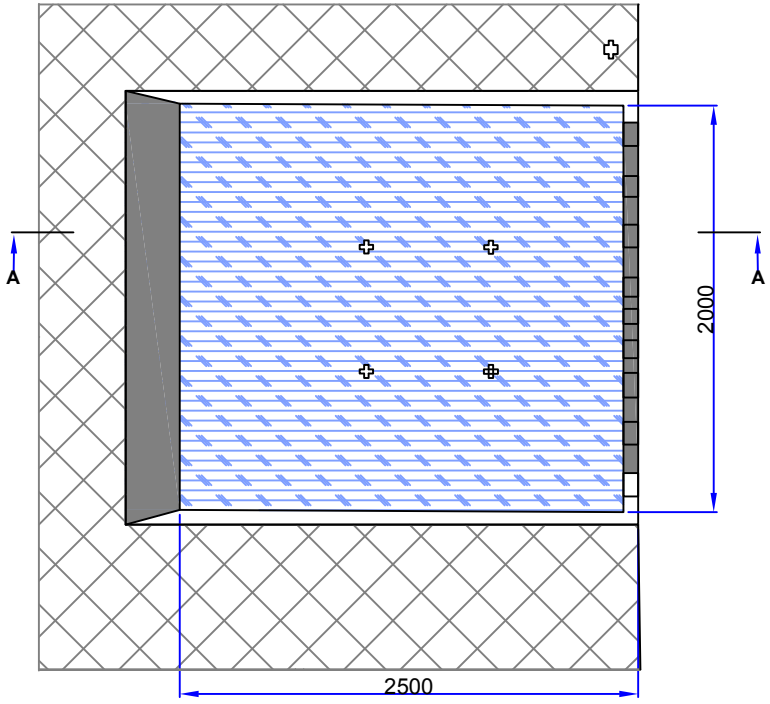
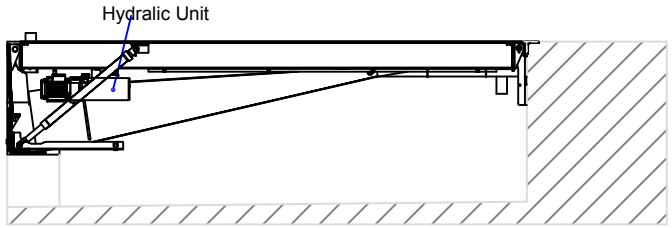
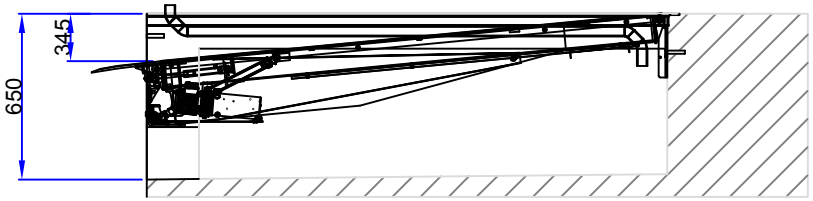


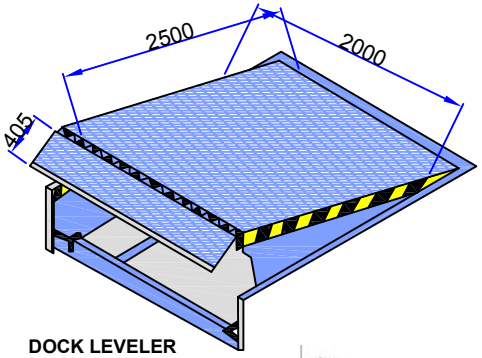

DOCK LEVELER PLAN



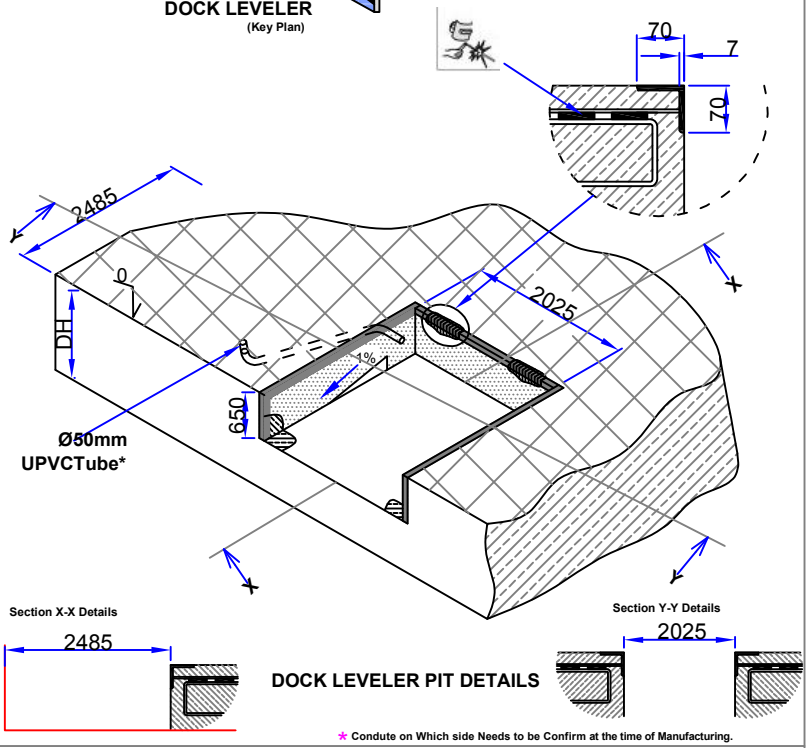

SECTION AT 'A-A'




DOCK LEVELER IN LOW POSITION

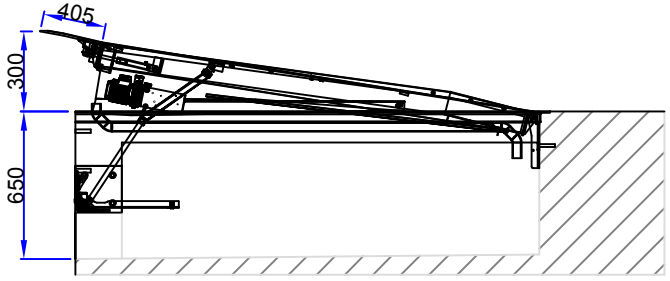



DOCK LEVELER
(Key Plan)




DOCK LEVELER PIT DETAILS

★ Condute on Which side Needs to be Confirm at the time of Manufacturing.




DOCK LEVELER IN TOP POSITION

| S No | Description | Remarks |
|---|---|---|
| 1 | Dock Leveller Type | Hinged |
| 2 | Nominal Operation Force | 60 KN dynamic/150 KN Static |
| 3 | Platform Construction | 2 Cylinder Technology Platform |
| 4 | Lip Type | Hinged Lip Type S (Length:405m |
| 5 | Integral Membrane Push Button in Housing(420S Controller) | Opening - Press/Hold<br>Closing - Auto |

**Accessories:**

| | YES | NO |
|---|---|---|
| Dock Buffer | ✓ | |

## Dock Leveller Dimensions:

| Description | Legend | Dim(mm) |
|---|---|---|
| Ordering Length | BL | 2500 |
| Ordering Width | BB | 2000 |
| Dock Leveller Installation Height | LH | 650 |
| DH-Ramp Height (Client To Inform) | | |
| | Qty | 3 Nos |

**Note:**

*** Any Additional Accessories To Be Added Will be provided at Additional Cost.**

**All Controllers should be placed within 5 mt from dock leveler and should be visible for safety**

**Client Scope:**

**** Provision of input cable up to Dock Levele Controller**

***Power Supply 16A 5 Pin metal Clad Socket 440V,50HZ,3Phase With Earth & Neutral**

**Pit Construction:** Construct the pit with dim accuracy and at right angles on all sides. The concrete quality must be atleast C20/25. Rear wall and floor must be flat an suitable for holding M16 drill-in anchors.
(1) Grouting collets M20 for Buffer fastening. 2 on each sid
(2) Edge Angles: 70x70x7mm, sufficiently anchored in the shaded area atleast 3anchors FeB 500 Φ 10/400mm on re
(3) UPVC tube Φ 50mm, max.angle 45° arrangment direct behind the facade,at least 150mm distance from the door opening.

| | |
|---|---|
| TITLE:DOCKLEVELLER | DRAWN BY: N.R<br>CHECKED BY:T.R.B<br>APPROVED BY: |
| CLIENT :M/s.MB ENTERPRISE. | DRAWING NOT TO SC/<br>D R G. N O.1605<br>Ref:MB/HR/PO/45/16-17 |
| All Dimensions are in mm unless or otherwise specified | DATE:04-11-2016. |

HORMANN