हिन्दुस्तान पेट्रोलियम HP	**Residue Upgradation Facility (RUF)** **EPCC-3 Package for** **Visakh Refinery Modernization Project (VRMP)**	L&T Hydrocarbon Engineering
इंजीनियर्स इंडिया लिमिटेड (भारत सरकार का उपक्रम) ENGINEERS INDIA LIMITED (A Govt. of India Undertaking)		**L&T- CHIYODA LIMITED**
Title: (504-LZ-930A/B) GAD For Dock Leveler **Doc. No.: BO16-RUF-LT-504-MP-GN-NTPL(1)-13002**		**Rev. No.: 01** **Page No: 1 of 4**

OWNER	**:**	**HINDUSTAN PETROLEUM CORPORATION LIMITED (HPCL)**
PMC	**:**	**ENGINEERS INDIA LIMITED, NEW DELHI (EIL)**
UNIT	**:**	**504**
PMC JOB NO.	**:**	**B016**
EQUIPMENT DESCRIPTION	**:**	**DOCK LEVELER**
EQUIPMENT TAG	**:**	**504-LZ-930A/B**
P. R. NO.	**:**	**BO16-RUF-LT-504-MP-PR-0014**
VENDOR NAME	**:**	**NIHVA TECHNOLOGIES PVT LTD**
VENDOR DOCUMENT NO.	**:**	**NIHVA_20-21_0157**

<table>
<tr><th rowspan="2">DOCUMENT SUBMISSION STATUS – LTHE/VENDOR</th><th colspan="6">REVIEW STATUS</th></tr>
<tr><th colspan="3">LTHE</th><th colspan="3">EIL</th></tr>
<tr><td>DOC. CATEGORY: (USE TICK MARK)
☑ R ☐ I
ISSUED FOR
☐ INFORMATION
☑ REVIEW
☐ CONSTRUCTION
☐ AS BUILT</td><td colspan="3">☐ Code 1 – No Comments. Proceed With Manufacture / Fabrication / Construction As Per The Document.
☑ Code 2 – Proceed With Manufacture/Fabrication/Construction As Per Commented Document. Revised Document Required.
☐ Review Code 3 – Document Does Not Conform To Basic Requirements As Marked. Resubmit For Review
☐ Code R– Document Is Retained For Records. Proceed With Manufacture / Fabrication
☐ Code V- Void (Submission Required / Not Required)</td><td colspan="3">☐ Code 1 – No Comments. Proceed With Manufacture / Fabrication / Construction As Per The Document.
☐ Code 2 – Proceed With Manufacture/Fabrication/Construction As Per Commented Document. Revised Document Required.
☐ Review Code 3 – Document Does Not Conform To Basic Requirements As Marked. Resubmit For Review
☐ Code R– Document Is Retained For Records. Proceed With Manufacture / Fabrication
☐ Code V- Void (Submission Required / Not Required)</td></tr>
<tr><td></td><td>DISCIPLINE</td><td>SIGN</td><td>DATE</td><td>DISCIPLINE</td><td>SIGN</td><td>DATE</td></tr>
</table>

01	Issued for Approval	Shilpa	Amit K	Amit K			24/09/2021
Revision No.	**Description**	**Prepared by**	**Reviewed by**	**Approved by**	**Reviewed by**	**Approved by**	**Approved Date**

REVISION HISTORY SHEET

REV. NO.	REV. DATE	REVISED PAGE	REVISION DESCRIPTION
01	24/09/2021	NA	ISSUED FOR APPROVAL

BOM(For Single Dock leveler)		
SL.NO	DESCRIPTON	QTY
1	Dock Leveler (1820 mm x 5000 mm)	1No
2	Lip (1820 x 250 mm)	1No
3	Deck Cylinder	2Nos
4	Lip Cylinder	1No
5	Power Pack(1HP,3Phase)	1No
6	Control Panel	1No

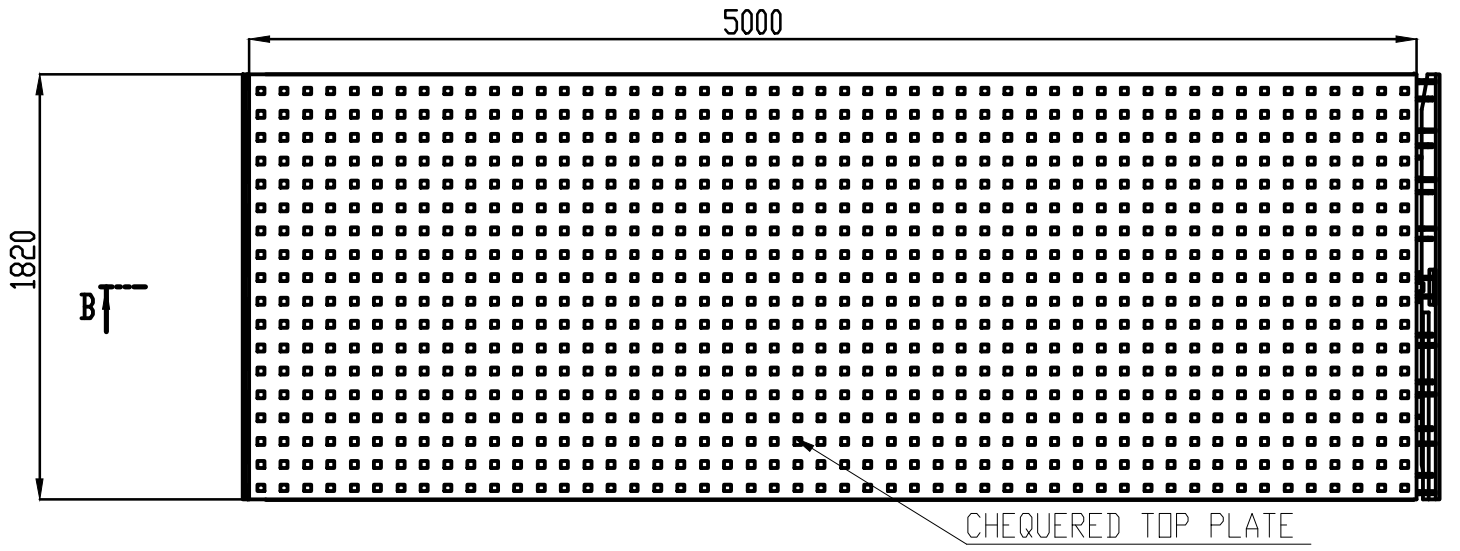

DOCK LEVELER TOP VIEW

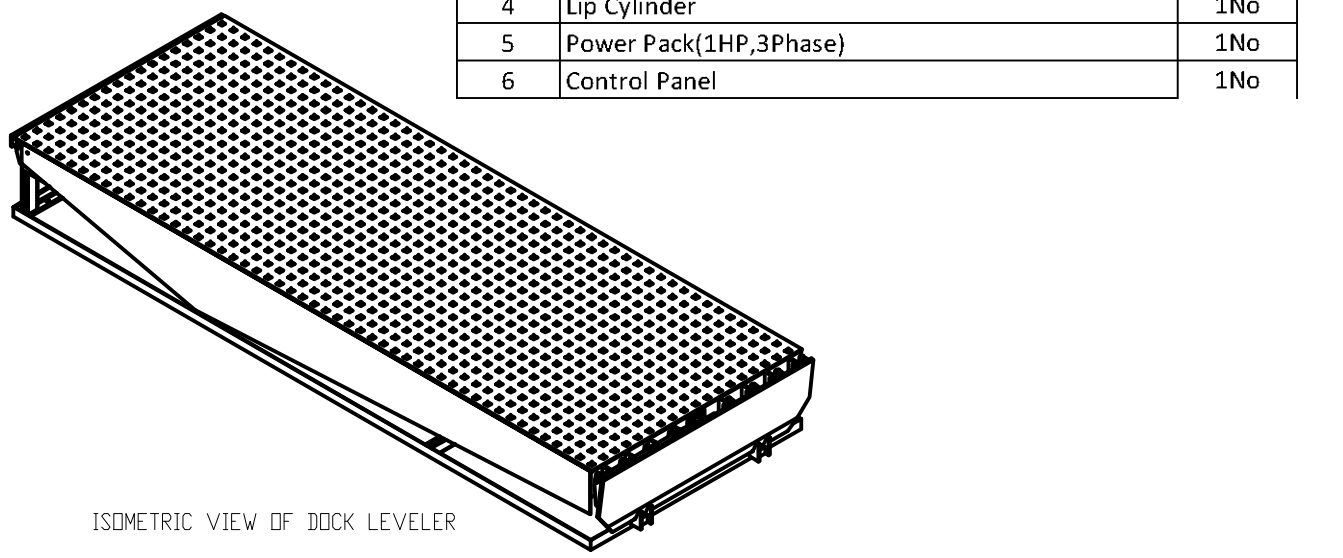
ISOMETRIC VIEW OF DOCK LEVELER

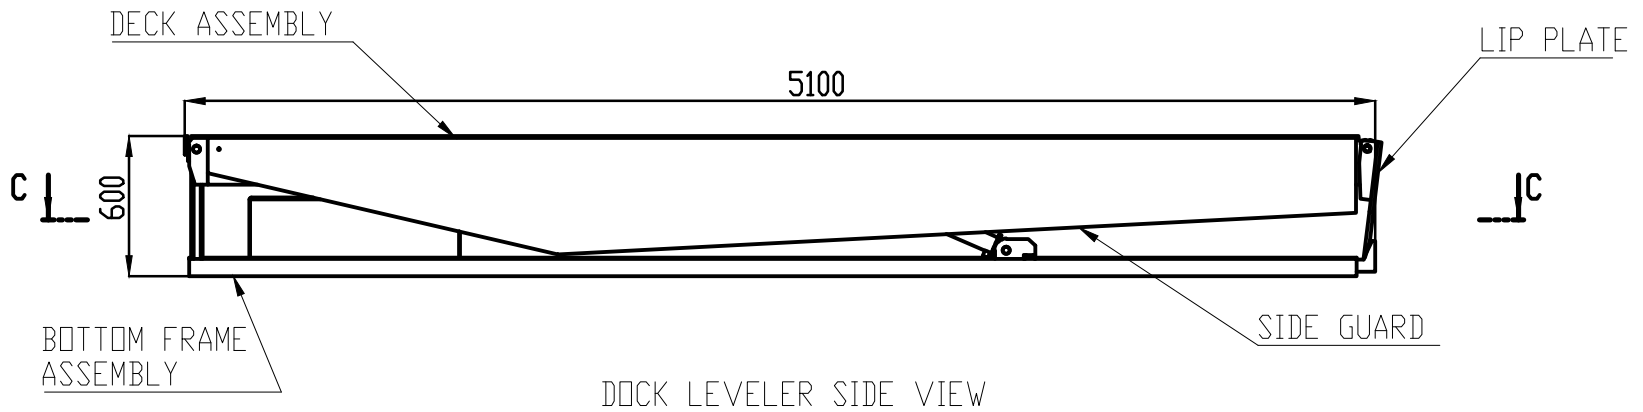

DOCK LEVELER SIDE VIEW

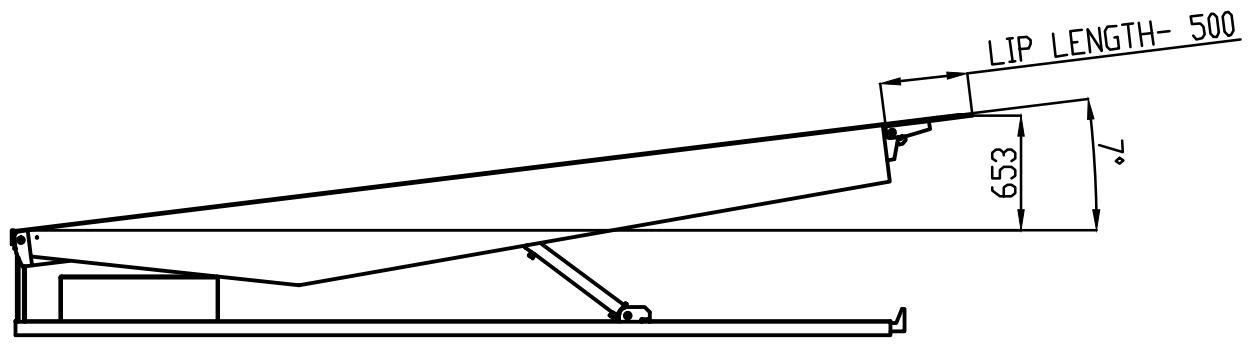

DECK UP HEIGHT - 600 MM

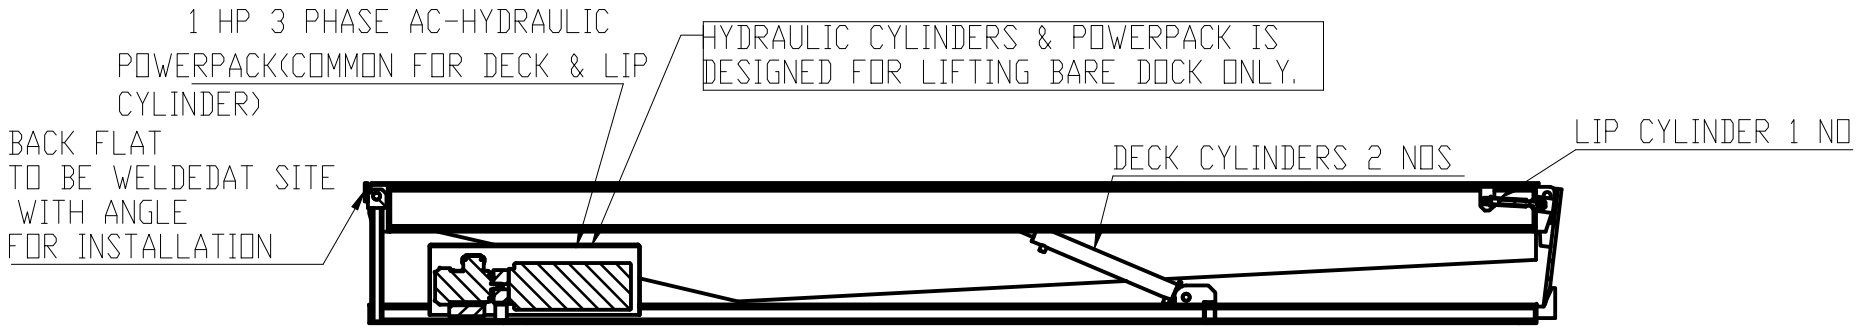
1 HP 3 PHASE AC-HYDRAULIC POWERPACK(COMMON FOR DECK & LIP CYLINDER)
HYDRAULIC CYLINDERS & POWERPACK IS DESIGNED FOR LIFTING BARE DOCK ONLY.
BACK FLAT TO BE WELDEDAT SITE WITH ANGLE FOR INSTALLATION
DECK CYLINDERS 2 NOS
LIP CYLINDER 1 NO

SECTION B-B
SCALE 1 : 15

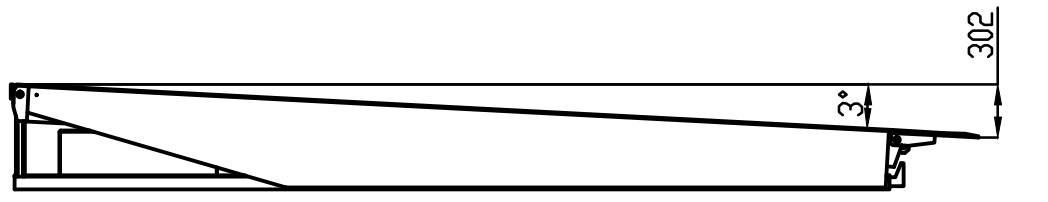

DECK DOWN HEIGHT - 300 MM

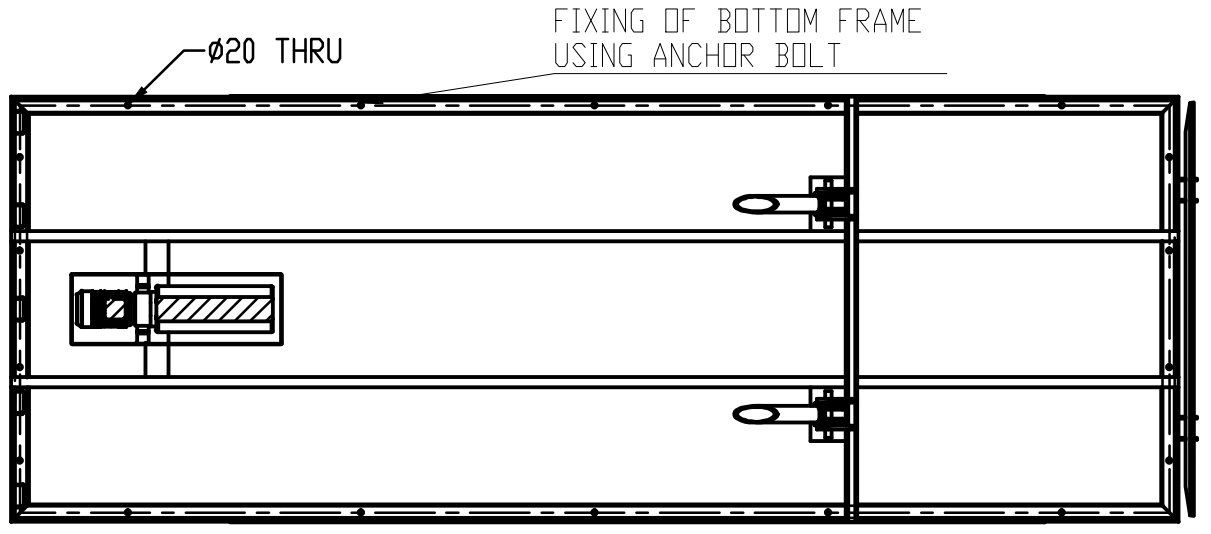

SECTION C-C
SCALE 1 : 15

TECHNICAL SPECIFICATIONS OF PIT MOUNTED ELECRO-HYDRAULIC DOCK LEVELER -

1. SIZE OF DOCK LEVELER = 1820mm(W) X 5000mm(L)
2. OVERALL SIZE OF PRODUCT = 1820mm(W)X5100mm(L)X600mm(D)
3. CAPACITY = 6 TON POINT LOAD
4. LIP PLATE SIZE = 500mm(L)X1820mm(W)
5. DECK PLATE = CHEQUERED SHEET 1820mm(W)x5000mm(L)
6. DECK & LIP UP=DOWN OPERATION BY HYDRAULIC CYLINDER
7. DECK UP HEIGHT= (+)600 MM
8. DECK DOWN HEIGHT= (-)300MM
9. HEIGHT OF DOCK LEVELER FROM ROAD LEVEL= 900 mm,
10. OPERATION CONTROL BY PUSH BUTTONS ON CONTROL PANEL MOUNTED ON STAND NEAR DOCK LEVELER
11. ELECTRICAL SUPPLY OF EQUIPMENT= 415 VOLT 3 PHASE AC , 50HZ
12. PAINT = FIROZI BLUE
13. MATERIAL OF CONSTRUCTION = MILD STEEL AS PER IS STANDARD
14. MANUFACTURING STANDARD OF DOCK LEVELER =EN1398
15. ELECRICAL MOTOR COMPLIANCE ZONE 1-IIC-T3 HAZARDOUS AREA .
16. PIT SIZE = 1870 mm(W)X5100mm(L)x600 mm(D)
17. DOCK LEVELER FIXING IN PIT BY ANCHOR BOLT .
18. REQUIRED PIT & ALL CIVIL WORK FOR MOUNTING OD DOCK LEVELER IS IN LTHE SCOPE .

REFER PIT DRAWING FOR CONSTRUCTION OF PIT B016-RUF-LT-504-MP-DW-NTPL(1)-13005

504-LZ-930A/B	CIVIL DRAWING OF DOCK LEVELER	
DRAWING NO.	DRAWING TITLE	REV

REFERENCE DOCUMENTS / DRAWINGS

DRG. CATEGORY: (USE TICK MARK) R I
SCH. DATE OF SUBMISSION
EIL REVIEW/APPROVAL CODE:
VPTL NO.:

DOCUMENT STATUS
STATEMENT OF SUB: 1st 2nd 3rd
☐ FINAL FOR CODE-1 ☑ AS BUILT

ISSUED FOR
☐ AS BUILT ☐ INFORMATION
☐ CONSTRUCTION ☐ REVIEW

SIGN: DATE:

☐ REVIEW CODE 1 – NO COMMENTS PROCEED WITH MANUFACTURE / FABRICATION/ CONSTRUCTION AS PER THE DOCUMENT.
☐ REVIEW CODE 2 – PROCEED WITH MANUFACTURE / FABRICATION / CONSTRUCTION AS PER THE COMMENTED DOCUMENT. REVISED DOCUMENT REQUIRED
☐ REVIEW CODE 3 – DOCUMENT DOES NOT CONFORM TO BASIC REQUIREMENTS AS MARKED. RESUBMIT FOR REVIEW.
☐ R – DOCUMENT IS RETAINED FOR RECORDS. PROCEED WITH MANUFACTURE / FABRICATION
☐ V-VOID

NAME DICIPLINE SIGN. DATE

REV.	DESCRIPTION	DRN	CHECKED	APPROVED	REVIEWED	APPROVED	DATE
00	ISSUED FOR APPROVAL	SMS	VJ	AK			

OWNER HINDUSTAN PETROLEUM CORPORATION LIMITED
VISAKH REFINERY MODERNIZATION PROJECT
EPCC-03 PACKAGE FOR RESIDUE UP-GRADATION FACILITY (RUF)

PMC : इंजीनियर्स इंडिया लिमिटेड ENGINEERS INDIA LIMITED
(A Govt. of India Undertaking)

LSTK CONTRACTOR: L&T Hydrocarbon Engineering

DETAILED ENGINEERING CENTER: L&T - CHIYODA LIMITED

L&T - CHIYODA LIMITED
☐ REVIEW CODE 1 – NO COMMENTS PROCEED WITH MANUFACTURE / FABRICATION/ CONSTRUCTION AS PER THE DOCUMENT.
☐ REVIEW CODE 2 – PROCEED WITH MANUFACTURE/ FABRICATION /CONSTRUCTION AS PER THE COMMENTED DOCUMENT. REVISED DOCUMENT REQUIRED.
☐ REVIEW CODE 3 – DOCUMENT DOES NOT CONFORM TO BASIC REQUIREMENTS AS MARKED. RESUBMIT FOR REVIEW.
☐ R – DOCUMENT IS RETAINED FOR RECORDS. PROCEED WITH MANUFACTURE / FABRICATION
☐ V-VOID

COMMENTED BY	REVIEWED BY	APPROVED BY	DATE

THIS REVIEW / APPROVAL DOES NOT RELIEVE THE VENDOR / MANUFACTURER OF THE FULL RESPONSIBILITY AS TO DESIGN CORRECTNESS OF DIMENSIONS & COMPLIANCE WITHALL APPLICABLE REGULATIONS AND WITH THE REQUIREMENTS MADE IN PURCHASER SPECIFICATIONS.

VENDOR : NIHVA TECHNOLOGIES PVT LTD
VENDOR PO NO: REFINARY/75000-02256/VHM
VENDOR DWG. NO: NIHVA_20-21_0157
DATE 31.05.21 SCALE 14
TITLE: 504-LZ-930A/B GAD FOR DOCK LEVELER
DEPT: DESIGN
DRN BY: SMS
CHK BY: VJ
APP BY: AK
PROJECT: L&T-RUF
PWO NO.:
DRG. NO.: [illegible]
SH.1 OF 1
REV. 00
CAD FILE:

DATA SHEET FOR DOCK LEVELER (504-LZ-930A/B)

Sr No	Parameter	Remark
1	Required Capacity	06 Ton
2	Leveler operation mode	AC power pack hydraulically operated
3	Lip operation mode	hydraulic
4	Operation control	by push buttons and control panel
5	Height of dock leveler from road Level	900 mm
6	Travel above & below dock level	600 mm & 300 mm
7	Platform Size (W x L)	1820 mm x 5000 mm
8	Lip size (W x L)	1820 mm x 500 mm
9	Maximum slope can be achieved	7 Degree
10	Manimum slope can be achieved	3 Degree

* Please refer Attachment-1 for standard catalog of Dock Leveler.