



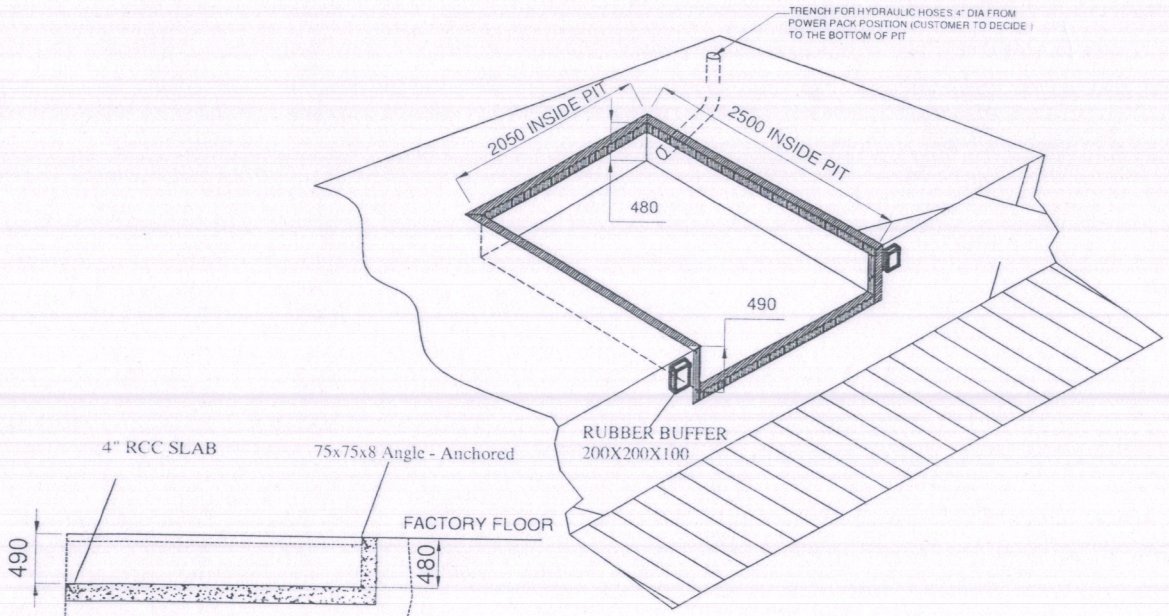


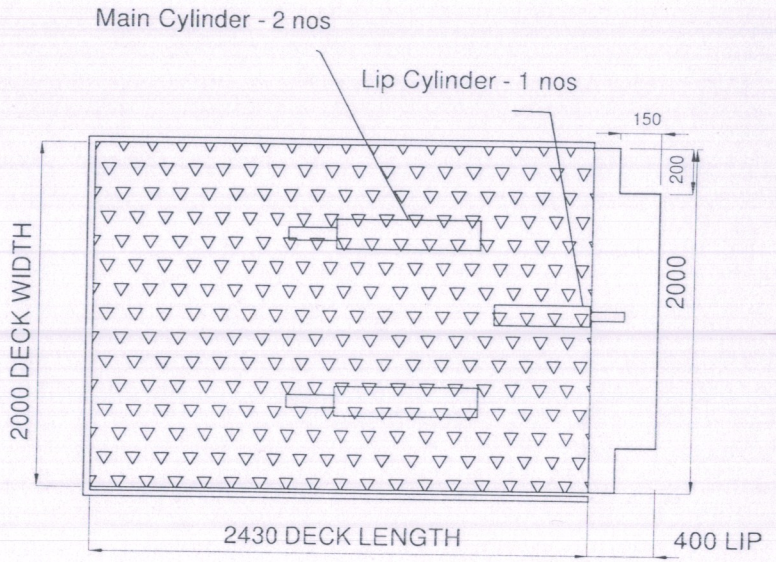

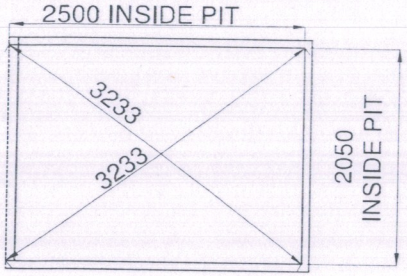



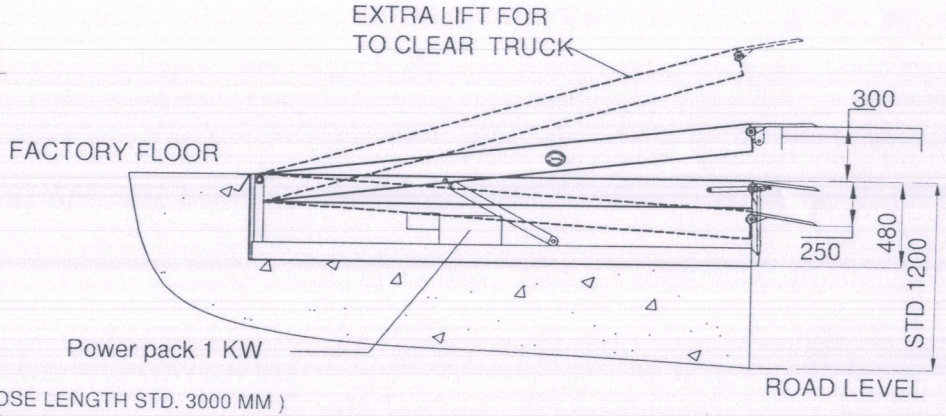

NOTE:
1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY HOSE LENGTH STD. 3000 MM)
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 12000 KGB FLOOR LOADING
4. FABRICATION TOLERANCE FOR PLATFROM SIZE WILL BE ∓ 10 MM

DOCK LEVELER 15 TON


NIHVA TECHNOLOGIES PVT. LTD. PUNE


Approved with
7/9/2021 vendor drg no- NIHVA/20-21/VDR/0121

TECHNOSYS EQUIPMENTS PVT. LTD.
PLOT NO - 144, SECTOR 10,
PCNTDA BHOSARI , PUNE 411 026
E- mail :- technolift@technosysequipment.com
Web :- www.technolift.in


OVERALL DOCK LEVELER SIZE	WIDTH (W)	LENGTH (L)	HEIGHT (H)	LIP (C) LENGTH
	2000	2500	480	400


PIT DIMENSION	WIDTH (W 1)	LENGTH (L 1)	DEPTH (D)	ALL DIMENSIONS ARE IN mm
	2050	2500	485	

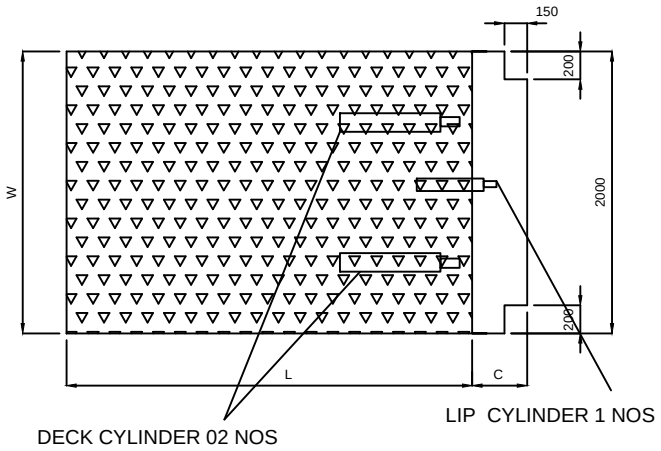


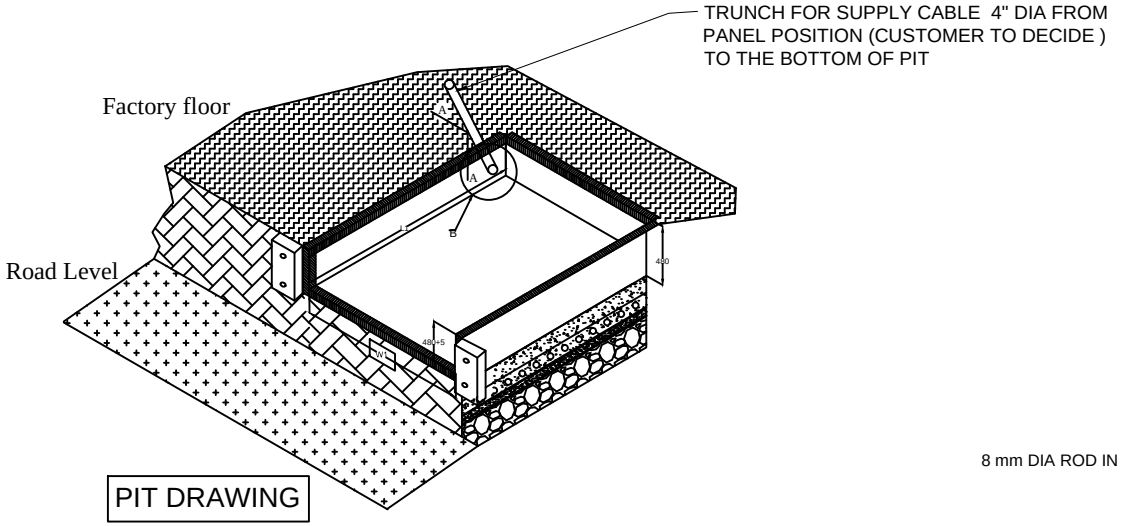

PIT DRAWING

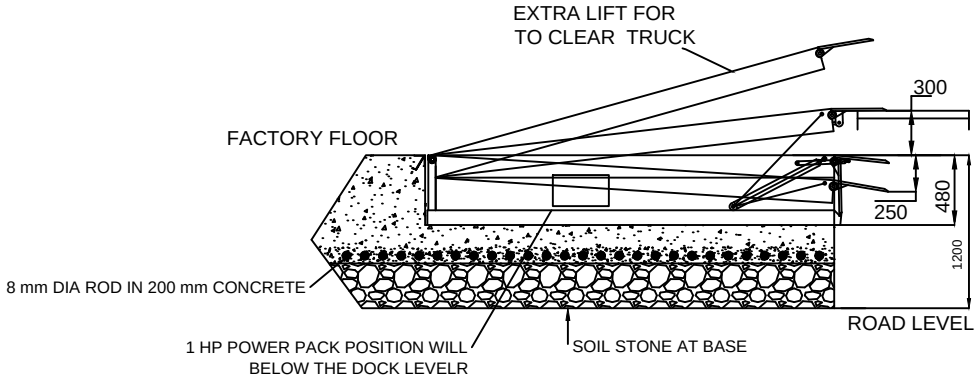





TOLERANCE :- ± 10mm

DOCK LEVELER- 15 TON CAPACITY UDL

NOTE :

1. ELECTRICAL CABLE FROM CONTROL PANEL TO PIT OPENING : 5 MTR
2. COLOR : GOLDEN YELLOW RAL 1004.
3. INPUT SUPPLY : 3 PHASE 400 VOLT WITH NEUTRAL NEAR POWER PACK LOCATION.
4. PAINTING - ALL PARTS IN GOLDEN YELLOW , ZEBRA MARKS FOR SIDE OF PLATFORM
5. GA DRAWING WITH ALL VIEWS IN SCALE 1:1 TO BE PROVIDED BEFORE MANUFACTURING.
6. OPERATION & MAINTENANCE MANUAL WITH SPARE PARTS LIST TO BE PROVIDED .
7. ALL RAW MATERIAL TEST CERTIFICATES TO BE PROVIDED .
8. INDIVIDUAL TEST CERTIFICATES OF HYDRAULIC CYLINDER & HYDRAULIC POWER-PACK TO BE PROVIDED BY SUPPLIER.
9. LOAD TEST TO BE PROVIDED BEFORE DISPATCH FOR RATED LOAD .

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE: DOCK LEVELER				NIHVA TECHNOLOGIES PVT. LTD. PUNE
	NAME	SIGN	DATE	Tel : 020 66304033
DRAWN	S.M.S.		6.4.2021	Email:- info@nihva.com
CHECK				Website:- www.nihva.com
APPRD.				

NIHVA TECHNOLOGIES PVT. LTD.

CLIENT -

PROJECT -

SITE LOCATION -

If any queries contact : design@nihva.com

DWG. NO. : NIHVA/20-21/VDR/0121 | REV- 01

ALL DIMENSION ARE IN mm | SCALE: NTS | WT: | SHEET: 01 OF 01