




RIGHT SIDE ELEVATION

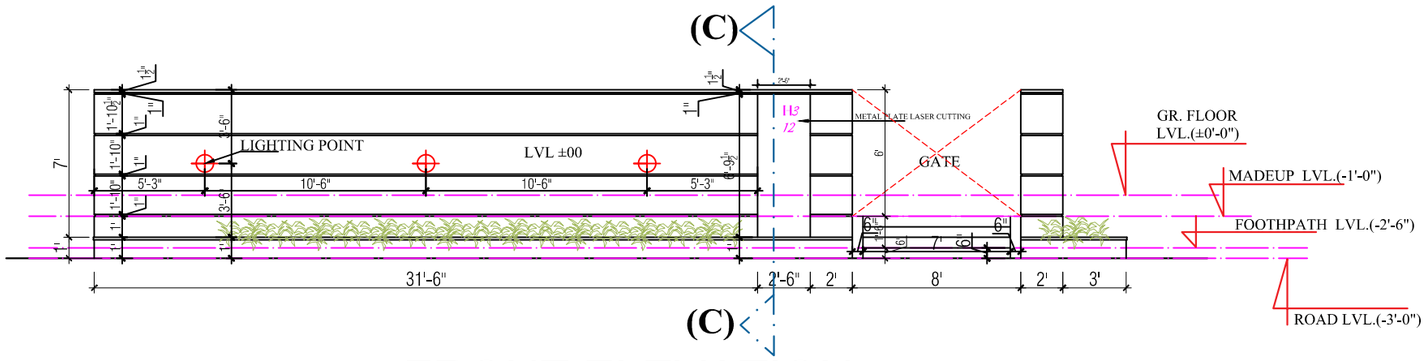

FRONT ELEVATION

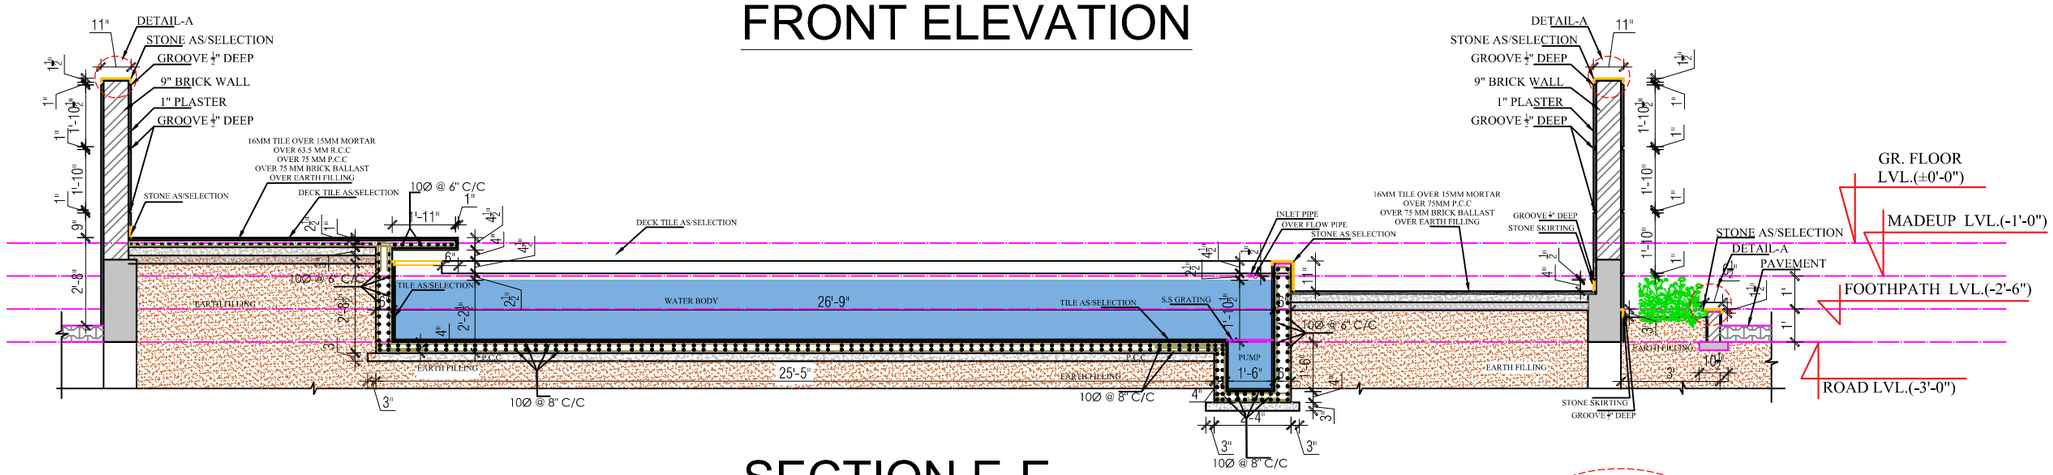

SECTION E-E

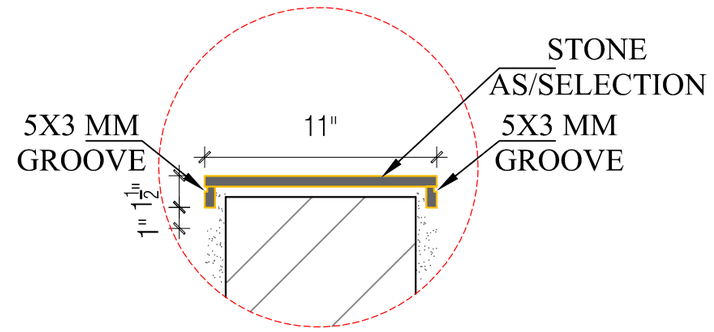

DETAIL-A

2 BOUNDARY WALL DETAILS
SCALE:- N.T.S

PROPOSED
RESIDENCE
SRI CHARU

Gomti Nagar Extension, Lucknow.

DESIGN CONSULTANT

Vijit & Associates
Architects, Engineers & Planners

B-1/236, Vikrant Khand, Gomti Nagar
Lucknow, 226010, U.P

CONTRACTAR

Mega Infra Developers

B-1/236, Vikrant Khand, Gomti Nagar
Lucknow, 226010, U.P


NOTES

1. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH THE RELEVANT ARCHITECTS DRAWINGS DISCREPANCIES TO BE REPORTED TO THE CONSULTING ENGINEERS BEFORE EXECUTION OF THE WORK.
2. UNLESS OTHERWISE SPECIFIED THE CRUSHING STRENGTH OF CONCRETE SHALL NOT BE LESS THAN 30 N/mm2 FOR ALL MEMBERS.
3. REINFORCEMENT SHALL BE HIGH YIELD STRENGTH DEFORMED BARS CONFORMING TO IS: 1786 (1979) INDICATED THUS
   1. Fy MAIN 500
   2. Fy SEC 415
4. MINIMUM COVER OF MAIN REINFORCEMENT SHALL BE:

(i) 60 mm IN ALL REINFORCED CONCRETE WORK BELOW GROUND LEVEL.
(ii) 40 mm IN COLUMNS ABOVE GROUND LEVEL.
(iii) 25 mm IN BEAMS ABOVE GROUND LEVEL.
(iv) 20 mm IN SLABS AND WALLS

5. NOT MORE THAN 40% OF THE VERTICAL BARS IN COLUMNS ARE TO BE LAPPED AT ONE SECTION AND MINIMUM LAP LENGTH BE 50xDIA. OF BAR UNLESS OTHERWISE SPECIFIED.
6. SBC OF SOIL IS ASSUMED TO BE 18 T/SQM. AT DEPTH OF 1.8M BELOW ORIGINAL N.G.L. LEV. AS PER NO SOIL REPORT PROVIDED
7. BRICK WORK SHALL BE CONSTRUCTED WITH BRICKS HAVING MINIMUM CRUSHING STRENGTH 70KG/SQCM. LAID IN CEMENT MORTAR 1:6 (1 CEMENT: 6 COARSE SAND) UNLESS OTHERWISE SPECIFIED.
8. ALL FOOTINGS ARE CENTRAL TO COLUMNS
9. BUILDING HAS BEEN DESIGNED FOR EARTHQUAKE ZONE-III

KEY PLAN



SEAL & SIGNATURE

GOOD FOR CONSTRUCTION

NO.	DATE	DESCRIPTION	SIGN
R1	28-02-24	UPDATE	Ar. MASIR

REVISION

DRAWING TITLE

BOUNDARY WALL DETAILS

DATE **28-02-24**

DRAWING NUMBER

C-115 R1 REVISION

© Copyright Vijit & Associates Architects, Engineers & Planners