



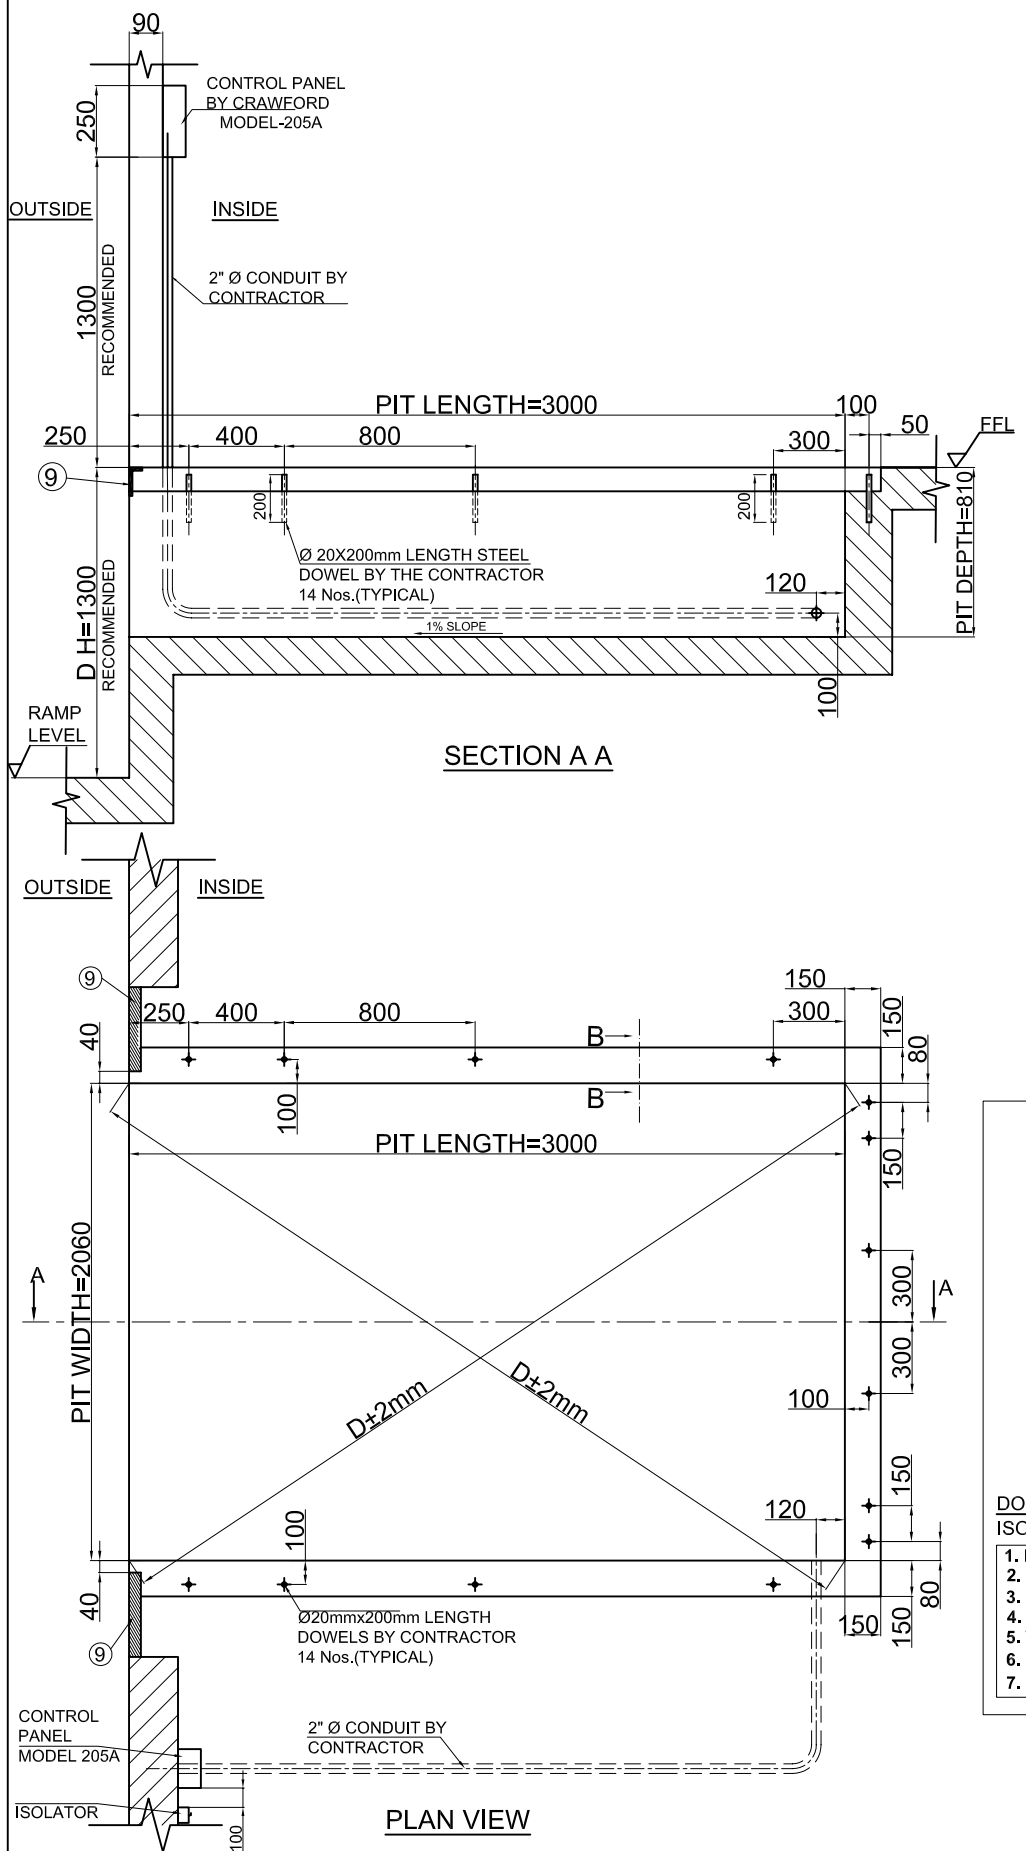


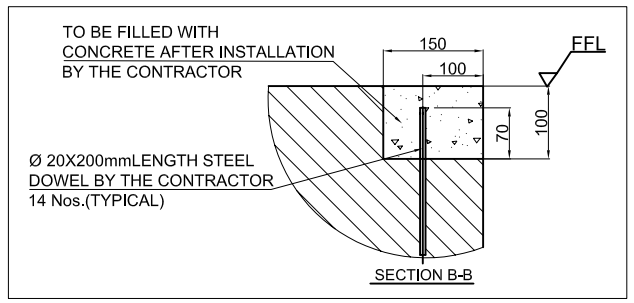


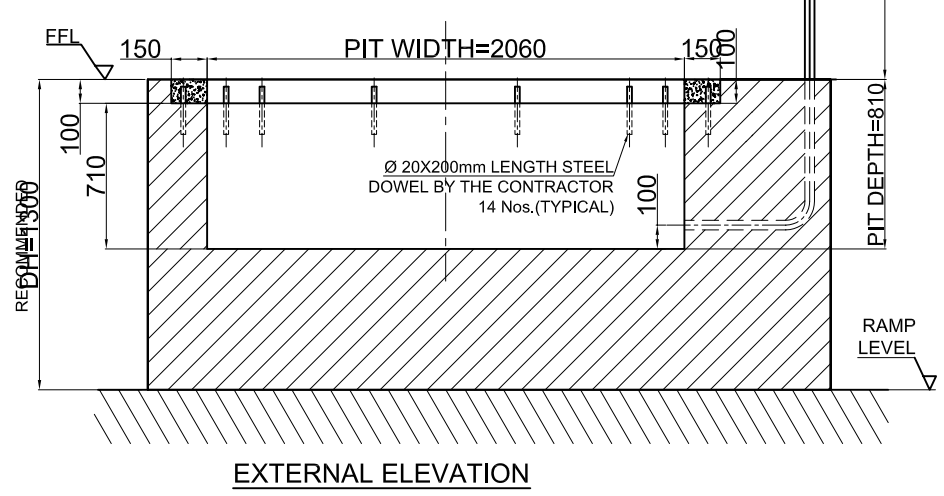

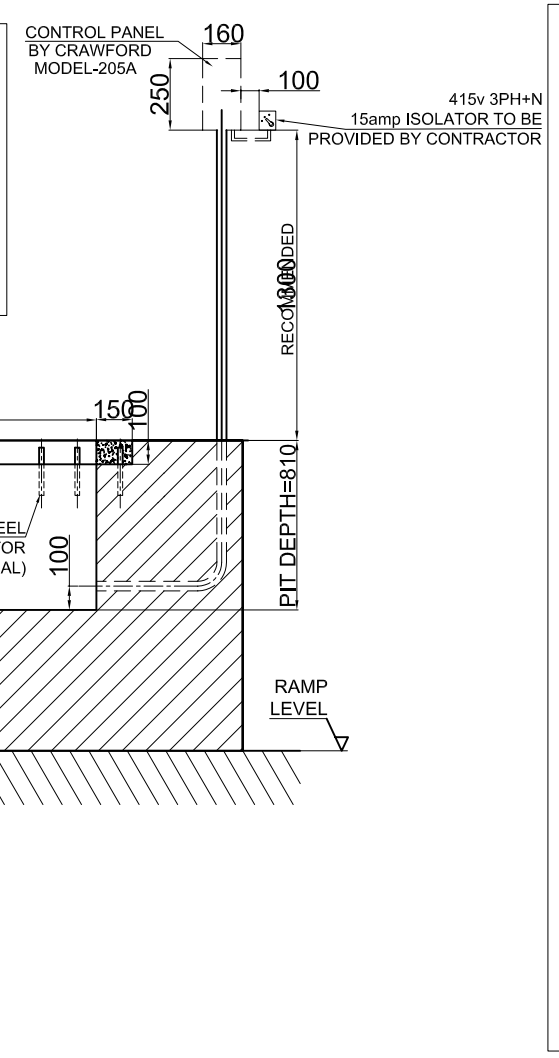

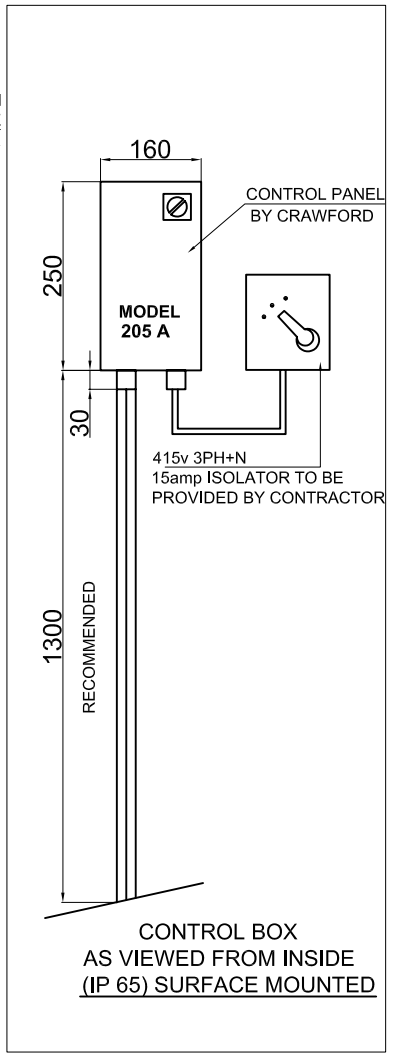

CONTROL BOX
AS VIEWED FROM INSIDE
(IP 65) SURFACE MOUNTED

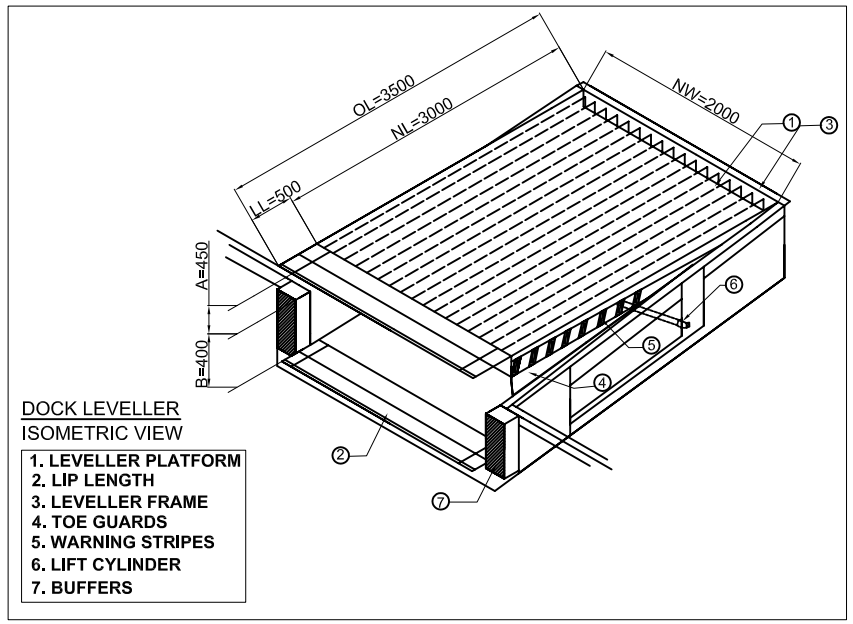


DOCK LEVELLER
ISOMETRIC VIEW

1. LEVELLER PLATFORM
2. LIP LENGTH
3. LEVELLER FRAME
4. TOE GUARDS
5. WARNING STRIPES
6. LIFT CYLINDER
7. BUFFERS

F= THE HORIZONTAL IMPACT LOAD F (100KN) MUST BE ABSORBED BY THE STRUCTURE

FI=57KN

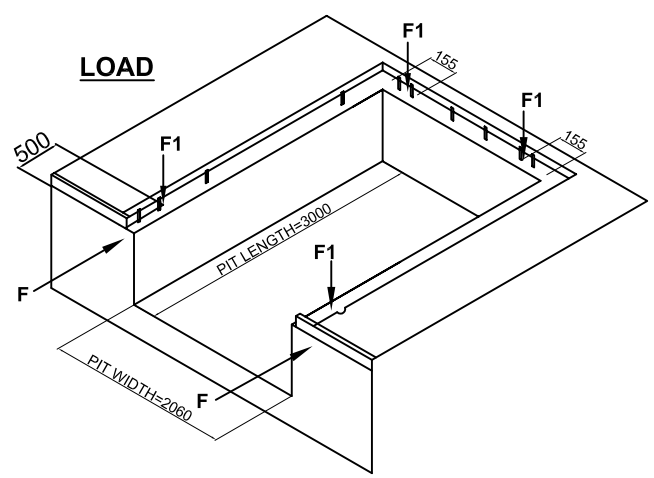

TELE DOCK-620

CAPACITY	NW	NL	LH	A / B	LL	COLOUR	QTY
6 TONS	2000	3000	800	450/400	500	RAL-5010	-

PIT DETAILS

PW	PL	PD	n	QTY
2060	3000	810	14	-

NOTES FOR THE CONTRACTOR:-

1 FINISHED FLOOR TO BE MADE GOOD AFTER INSALLATION BY OTHERS.
2 WHEN CONSTRUCTING THE PIT SPECIAL ATTENTION MUST BE PAID TO ENSURE THE PIT SIDES ARE FLAT AND THE CORNERS ARE SQUARE.
3 DIAGONAL MEASUREMENT ACROSS THE CORNERS OF THE PIT ARE TO BE WITHIN A TOLERANCE OF ±2MM.
4 ALL ITEMS SHOWN ARE TO BE SUPPLIED AND PREPARED BY THE CUSTOMER/CONTRACTOR.
5 THE LOAD APPLIED AT THE REAR OF THE FRAME IS 6T. THIS IS SPREAD OVER THE FULL WIDTH OF THE PIT AND IS NOT A POINT LOAD.
6 CONCRETE SEALANT BY OTHERS.
7 ISOLATOR 3 PH 415V 15AMPS+N BY CONTRATOR
8 PLAIN STEEL DOWEL Ø 20 - 200mm LENGTH (14Nos)
9 STEEL PROFILE 120X80X10 TO BE PROVIDED BY THE CONTRACTOR
10 Ø 2" CONDUIT TO BE PROVIDED AS SHOWN

ABBREVIATION

NL	NOMINAL LENGTH OF LEVELLER
NW	NOMINAL WIDTH OF LEVELLER
LH	LEVELLER HEIGHT
DH	DOCK HEIGHT
OL	OVERALL LENGTH=NL+LL
GL	GRADIENT LENGTH=OL-140
A	LEVEL OF EQUILIZATION ABOVE THE F.F.L
B	LEVEL OF EQUILIZATION BELOW THE F.F.L
LL	LIP LENGTH
PD	PIT DEPTH
PW	PIT WIDTH
n	NUMBER OF FISH TAILS
FFL	FINISH FLOOR LEVEL

MODEL **TELE DOCK 620**

PROJECT

CUSTOMER

TITLE
PIT DETAILS FOR TELE DOCK LEVELLER WITH OUT TAIL LIFT RECESS

SUB CONTRACTOR / SUPPLIER:

Crawford
A company in a cardo group

DUBAI
P.O. BOX: 80983
TEL: 04-8852888
FAX: 04-8854919

ABU DHABI
P.O. BOX: 32996
TEL: 02-6318200
FAX: 02-6210607

DESIGNED BY:-	DATE:-
DRAWN BY:-	ALL DIMENSIONS ARE IN MM
CHECKED BY:-	SCALE:- N.T.S
APPROVED BY:-	
DRAWING NUMBER TD-620-003	REV:- 00