


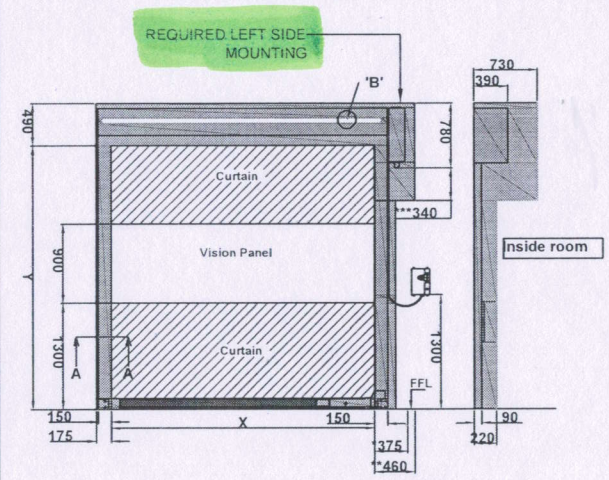


INSIDE ELEVATION





SECTION DETAIL'S 'A'A'




SECTION DETAIL'S 'B'

* Space for fiting the door


** Space require for fit and dismantle the operator

*** For Emergency Crank Handle

Note:All Doors To Be Fixed From The Inside Only

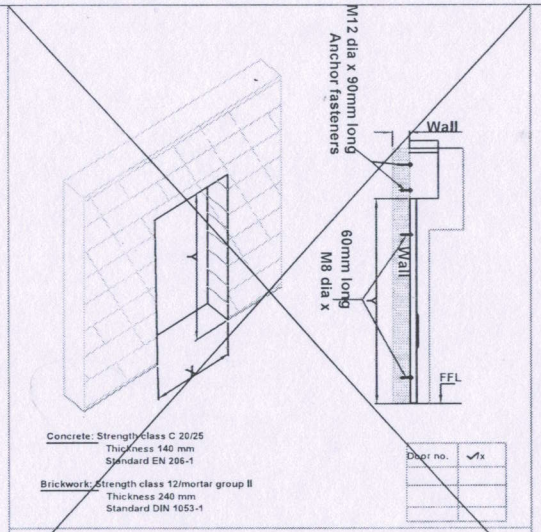


FIXING ON BRICK WALL/CONCRETE

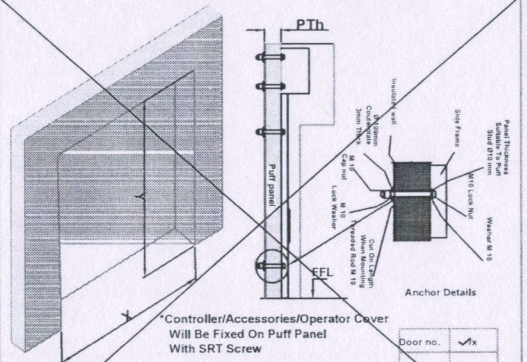

Puff Panel Thickness (PTh)=_____


Puff Panel Colour RAL _____

FIXING ON PUFF PANELS

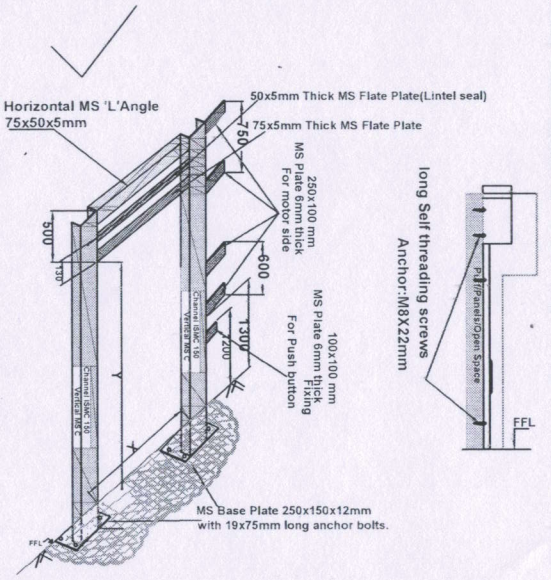


Steel: Strength class S235-JRG2
Thickness 5 mm
Standard EN 10027-1

Door no.	✓1x



Vertical MS C Channel ISMC 150



Horizontal MS 'L'Angle 75x50x5mm

* All Strctural Dimensions Shown are Minimum Requirment

FIXING ON STEEL STRUCTURE

Door no.	Clear Width X	Clear Height Y	Qty.s	Motor side (client scope) R or L (client scope)	Colour Select (✓) RAL 2004 / RAL 3002 / RAL 5010 / RAL 7038
1	3415	4300	1	L	RAL 5010

NIHVA REQUIREMENT -
(1) CABLE LENGTH REQUIREMENT IS 5 METER FROM MOTOR
(2) MOTOR & PUSH BUTTON ON LEFT SIDE
(3) HSD DIMENSIONS CHANGED

Standard Accessories:

	Description		FixingOn (Wall/Structure/Puff)
1	Controller BK 150 FUE	1 No	Structure

Optional Accessories:

	Description	Qty	FixingOn (Wall/Structure/Puff)
	SURFACE MOUNTED PUSH BUTTON (A) UP/DOWN (B)UP/STOP/DOWN	2Nos	
	Radar		

Client scope
1) 16A 3 Pin Industrial type female Metal clad socket 230V, 50Hz, with earthing around 1/2 Meter From Controller
2) Clean Uninterrupted Power Supply WithOut Voltage Fluctuations Needed.
3) Solid State Inline (UPS/Stabilizer) 2kva Capacity Required

Notes:
1) Operator is Always on Right side as Standard
2) Controller is Always On Operator Side
3) Steel Structure Procurement,Fixing and Strength is Client Responsibility (Minimum Dimensions are Shown in the Drawings)
4) Puff Panel Anchor bolt Length Would Change as based on Panel Thickness

✓

Note:All Doors To Be Fixed From The Inside Only

HÖRMANN	DRAWN BY: H K CHECKED BY T.R.B APPROVED BY: Babu Sir
TITLE: HIGH SPEED DOOR - V5015 SEL WITH COVER	DRAWING NOT TO SCALE
CLIENT:M/s. Nihva Technologies	D R G. N O. 9346 REV 0 PO No : Mail
PROJECT:M/s. Nihva Technologies	DATE: 30-11-2020

NIHVA TECHNOLOGIES PVT. LTD. PUNE

Approved with requirement highlighted.