



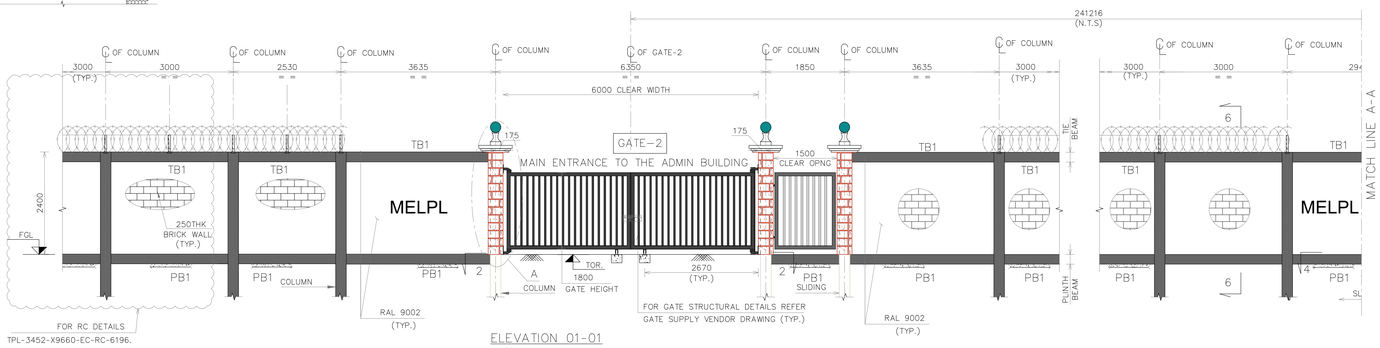



GATE NO	TYPE	DESCRIPTION
GATE-2	OPENABLE GATE	MAIN ENTRANCE TO THE ADMIN BUILDING
GATE-3	SLIDING GATE	MAIN ENTRANCE TO THE LPC
GATE-4	SLIDING GATE	MAIN ENTRANCE TO THE FACTORY


IMPORTANT NOTE


1. BOUNDARY WALL TO BE CONSTRUCTED AFTER FILLING
2. MS POST, HEAVY DUTY HINGES AND AUTOMATION SYSTEMS FOR THE AUTOMATIC MOTORIZED AND MANUAL GATES ARE FIXING BY USING ANCHOR FASTENER (BY M/S NIHVA SCOPE)
3. SIZES & RC DETAILS FOR THE FOOTING(F1),COLUMN(C3), PLINTH BEAM(PB1), TIE BEAM(TB1) REFER DRAWING NO.TPL-3452-X9660-EC-RC-6196 (Sht 2 & 3)
4. BEFORE CONSTRUCTION GATE COLUMNS, CROSS CHECK WITH THE GATE VENDOR DRAWING

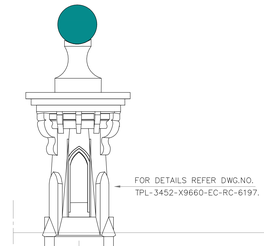




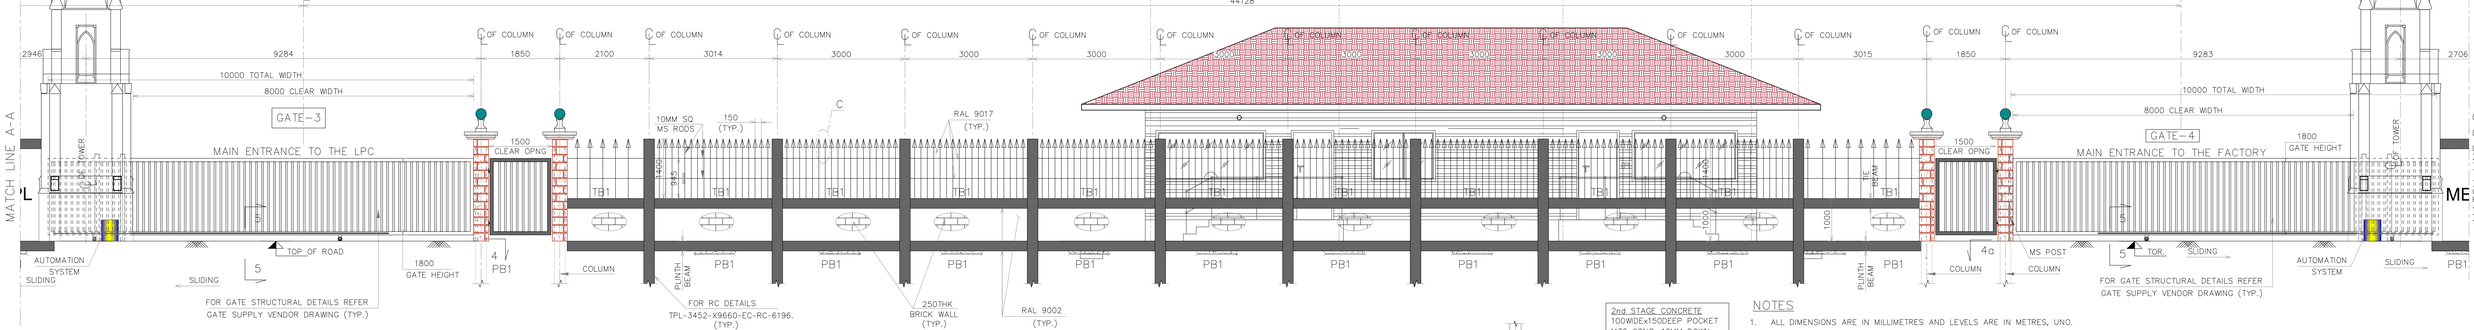

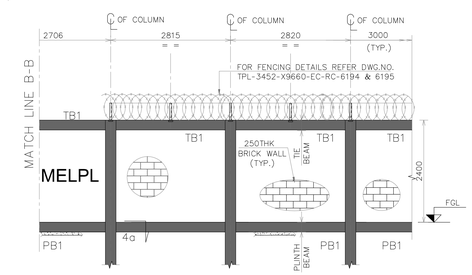


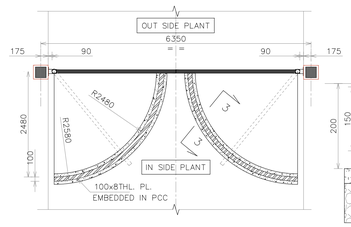


VIEW 2-2
1:50

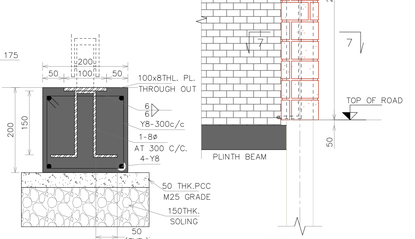


SECTION 3-3
1:5

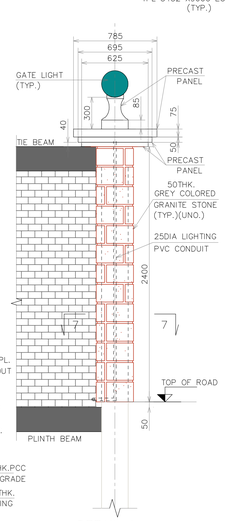


DETAIL A
1:20

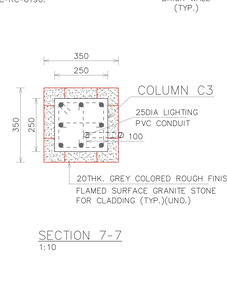

SECTION 7-7
1:10

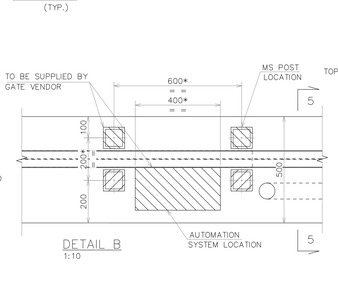


DETAIL B
1:10

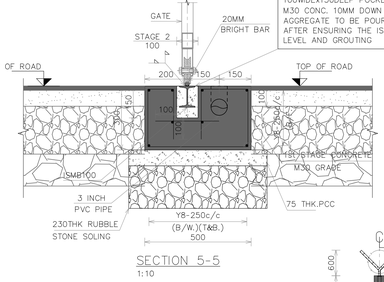


SECTION 5-5
1:10

2nd STAGE CONCRETE 100WIDEx150DEEP POCKET M30 CONC. 10MM DOWN AGGREGATE TO BE POURED AFTER ENSURING THE ISMB LEVEL AND GROUTING

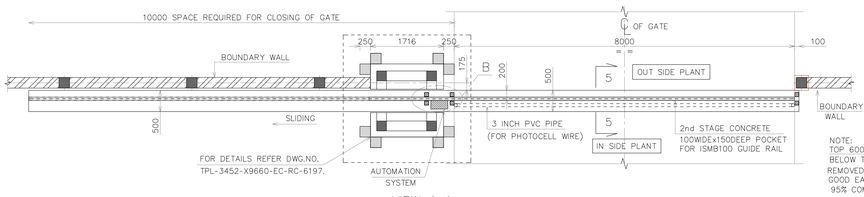

VIEW 4-4
VIEW 4a-4a (MIRROR IMAGE OF SEC. 4-4)
1:50

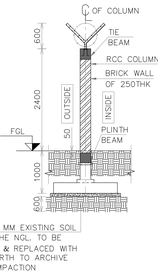

SECTION-6
TYPE-2 (BRICK WALL)
1:50

NOTES


1. ALL DIMENSIONS ARE IN MILLIMETRES AND LEVELS ARE IN METRES, UNO.
2. GRADE OF CONCRETE SHALL BE M25 (CONFIRMING TO IS :456)
3. ALL REINFORCEMENT SHALL BE HIGH YEID STRENTH DEFORMED BARS CONFIRMING TO IS:1786 (GRADE OF Fe-500)
4. LEAN CONCRETE UNDER FOUNDATIONS SHALL BE 75 mm THICK OF GRADE M10 UNLESS NOTED OTHERWISE
5. CLEAR COVER REINFORCEMENT SHALL BE AS FOLLOWS

	TOP	BOTTOM	SIDES
a) FOOTING	50	50	50
b) COLUMN	-	-	40
c) BEAMS	35	35	35

6. FOOTINGS SHALL BE CONCENTRIC WITH COLUMNS UNLESS OTHER WISE NOTED
7. LAPS SHALL BE STAGGERED.LAP LENGTH SHALL BE 50xDIA OF BAR.
8. ALL EXCAVATION PIT SHALL BE KEPT IN DRY WORKING CONDITIONS BY TAKING APPROPRIATE MEASURES FOR FACILITATING EXCAVATION AND CONCRETING WORKS.
9. DIMENSION MARKED " * " TO BE CONFIRMED BY GATE VENDOR

REFERENCE

1. FOR TOWNSHIP AREA COMPOUND WALL DETAILS REFER DWG NO: TPL-3452-X9660-EC-RC-6194.
2. READ THIS DRAWING IN CONJUNCTION WITH REFER DWG NO: TPL-3452-X9660-EC-RC-6196.
3. FOR ROAD & DRAIN LAYOUT DETAILS REFER DRAWING NO. TPL-3452-X9690-EC-RC-6190.



DETAIL C
1:10

LEGEND

℄ : CENTER LINE
TYP : TYPICAL
TB : TIE BEAM
PB : PLINTH BEAM
FGL : FINISHED GROUND LEVEL
NGL : NATURAL GROUND LEVEL

ENGG. REFERENCE

1. FOR 8m GATE DETAILS REFER M/S NIHVA DRAWING NO. NIHVA/17-18/0078
2. FOR 6m GATE DETAILS REFER M/S NIHVA DRAWING NO. NIHVA/17-18/0082
3. FOR WICKET GATE DETAILS REFER M/S NIHVA DRAWING NO. NIHVA/17-18/0083
4. FOR TOWER DETAILS REFER DRAWING NO. TPL-3452-X9660-EC-RC-6197.

REV.NO.	DATE	REVISION	CIVIL	MECH	ELEC	INST	APPD	DRAWN
2								
1	05.10.17	ISSUED FOR APPROVAL					AS	GMN
0	05.09.17	ISSUED FOR APPROVAL					AS	GMN
		CLEARED						

THIS DRAWING IS PROPERTY OF "TATA PROJECTS LIMITED" MUST NOT BE PASSED ON TO ANY PERSON OR BODY NOT AUTHORIZED BY US TO RECEIVE IT NOR BE COPIED OR OTHERWISE MADE USE EITHER IN FULL OR IN PART BY SUCH PERSON OR BODY WITHOUT OUR PRIOR PERMISSION IN WRITING.

EPC CONTRACTOR
TATA PROJECTS LIMITED
H. NO.1-7-80 TO 87, "MITHONA TOWERS – 1"
PRENDERGHAST ROAD, SECUNDERABAD – 500003.

PROJECT TITLE
PLANT FACILITY FOR
MADHEPURA ELECTRIC LOCOMOTIVE PRIVATE LIMITED
AT MADHEPURA, BIHAR.

OWNER
MADHEPURA ELECTRIC LOCOMOTIVE PRIVATE LIMITED

OWNER A/E CONSULTANT :
SEMAC CONSULTANTS PVT LTD
6-1-276, 2ND FLOOR, ARCHANA BLOCK, CONJEEVARAM HOUSE, PADMARAO NAGAR SECUNDERABAD – 500025.

	SIGNATURE	DATE
DRAWN	GMN	05.09.17
DESIGNED	SR	05.09.17
CHECKED	AS	05.09.17
DEPT.HEAD	AS	05.09.17

RELEASED FOR: INFORMATION; APPROVAL; ENGINEERING; CONSTRUCTION ✓

DWG. TITLE:
FACTORY AREA
GATE-2, GATE-3 & GATE-4 DETAILS
TYP. PLAN & ELEVATION DETAILS

DEPT. CIVIL | JOB NO. 0000 | SCALE: — | SHEET: 2 OF 2 | SIZE : A0
FILE NAME. MELPL-M-RC-RDR-206 | REV./ISSUE
DWG.NO. TPL-3452-X9660-EC-RC-6195 | R1