


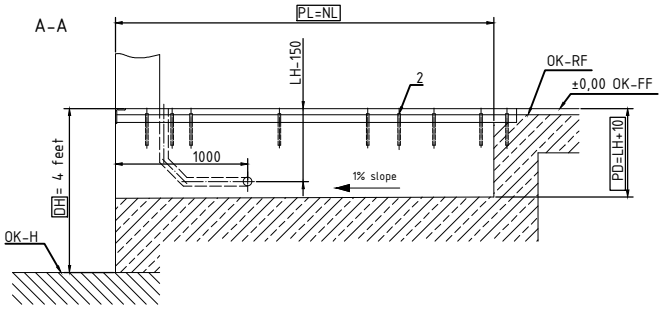


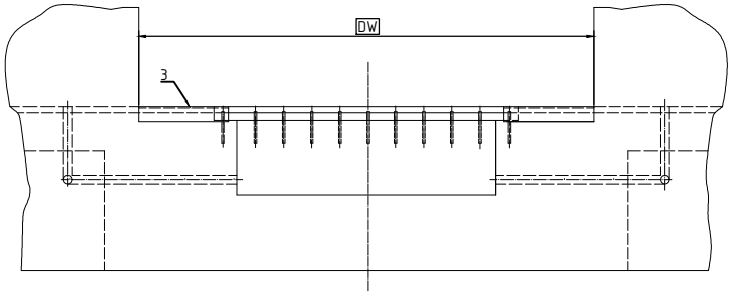

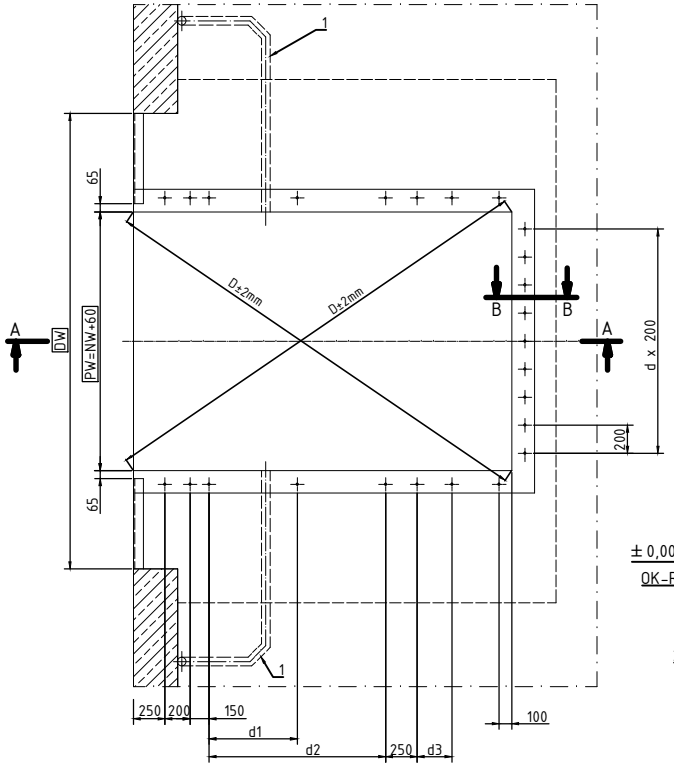

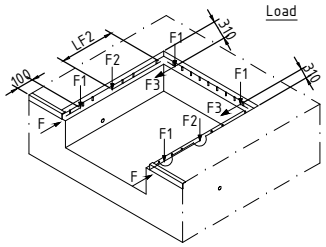

load capacity

F = The horizontal impact load (100kN) must be absorbed by the structure recommended according to DIN 1055-9

F1 = 95 kN (cross traffic position)


F2 = 70 kN (emergency stop)

F3 = 30 kN (brake force)

NL	3000
LH	700
n	14
d1	700
d2	1400
d3	--
LF2	850

NW	PW	d	n1
2000	2060	8	9

B-B (1:10)

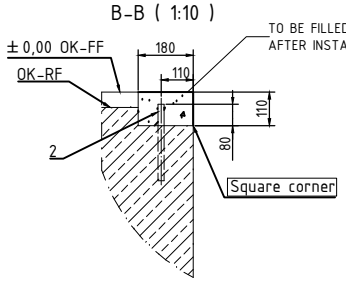

TO BE FILLED WITH CONCRETE AFTER INSTALLATION BY THE CONTRACTOR.

DH = dock height
DW = door width
OK-FF = finish floor level
OK-RF = floor base
OK-H = yard level
PL = pit length
PW = pit width
NL = nominal length
NW = nominal width
LH = leveller height
PD = pit depth
n = number of steel dowels (left and right side)
n1 = number of steel dowels (on the rear)

by others

1 - Conduit for wiring internal diameter min. 70 mm angles < 45° (left/right, acc. specification of sales company)

2 - Plain steel dowel Ø20 - 250 mm

3 - Steel profile e.g. angle 120x80x10

Attention

- Do not deviate from the measurments given
- The pit walls must be vertical
- The corners of the pit must be square (diagonals must be equal)
- The preparation of the pit and the dowels by other

DIMENSION :

CLEAR WIDTH	CLEAR LENGTH	QUANTITY
2000	3000	01

MATERIAL :

THICKNESS :

NIHVA TECHNOLOGIES PVT. LTD.

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Email:- info@nihva.com
Website:- www.nihva.com

TITLE:

DL6111S DOCK LEVELER 10MT PIT DRAWING.

CLIENT'S APPROVAL :

CLIENT -FCI OEN CONNECTORS LTD.

PROJECT -

SITE LOCATION -KERALA.

DWG. NO. : NIHVA/17-18/0245

SCALE: NTS | WT: | SHEET:1 OF 1

DRAWN BY: SURAJ | DATE: 16-10-2017

CHECK BY: SHEKHAR | DATE: 16-10-2017

APPROVED BY: SHEKHAR | DATE: 16-10-2017

If any queries contact : projects@nihva.com

NOTE: ALL DIMENSIONS ARE IN mm

THIS DRAWING & DESIGNING IS THE PROPERTY OF NIHVA TECHNOLOGIES. NOT TO BE SOLD OR COPIED TO ANY OTHER CONCERN.