

DOCK LEVELER SIZE	WIDTH (W)	LENGTH (L)	HEIGHT (H)	LIP (C) LENGTH
	2000	2500	600	400

PIT DIMENSION	WIDTH (W 1)	LENGTH (L 1)	DEPTH (D)	ALL DIMENSIONS ARE IN mm
	2230	2650	610	

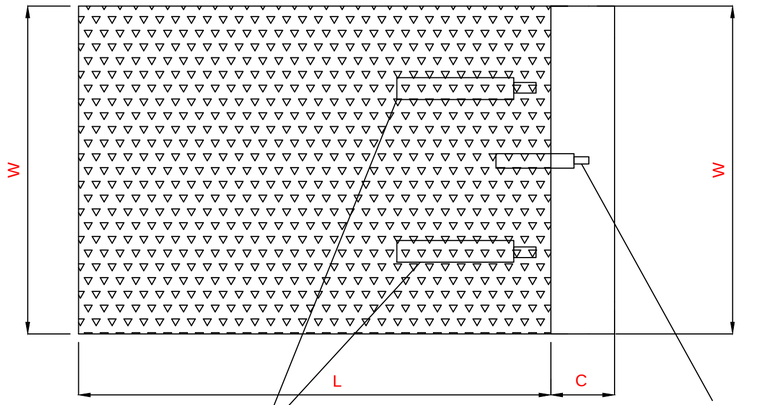



DECK CYLINDER 02 NOS


LIP CYLINDER 1 NOS

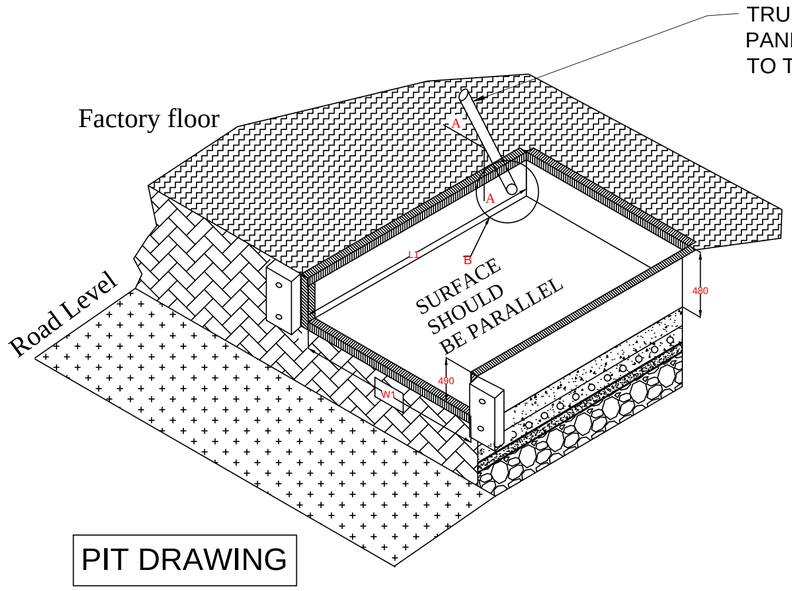


PIT DRAWING

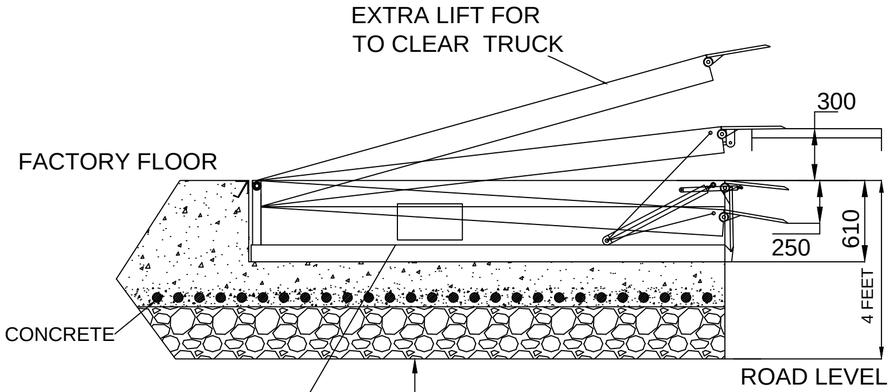

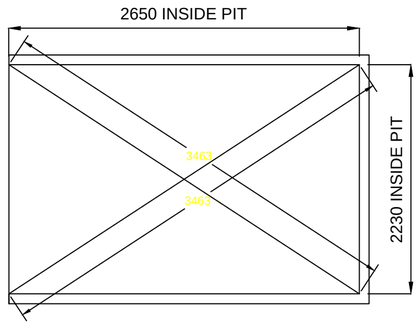



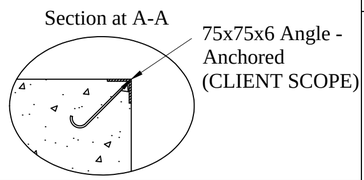

NOTE: -

1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY CABLE LENGTH STD. 3000 MM)
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 18000 KGB FLOOR LOADING
4. MOUNTING ARRANGEMENT FOR BUMPERS SHOULD BE MADE AS PER BUMPER DRAWING (IF ORDERED)
5. FABRICATION TOLERANCE FOR PLATFROM SIZE WILL BE + 10 MM
6. DOCK LEVELER PAINT WILL BE AS PER STANDARD RAL CODE: RAL 9005 (BLACK)

DOCK LEVELER- 6 TON CAPACITY

IMP NOTE: -

1.PLEASE NOTE THAT THE CAPACITY OF DOCK LEVELER CONSIDERED IS THE CAPACITY AFTER THE LIP IS RESTED ON THE VEHICLE.

2.CYLINDERS PROVIDED ARE INTENDENT TO BE USED ONLY FOR LIFTING OF BARE DOCK & CAN NOT LIFT OTHER LOADS.

TOLERANCE :- ± 10mm

REV 01: PLATFORM SIZE CHANGE TO 2970MM FROM 3000MM

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE

DOCK LEVELER

	NAME	SIGN	DATE
DRAWN	G.P		10.12.2021
CHECK	A.K.		10.12.2021
APPRD.	V.T.		10.12.2021

If any queries contact : design@nihva.com

ALL DIMENSION ARE IN mm

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.
Website:- www.nihva.com

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com

CLIENT - MEHER GALVANIZING

PROJECT -

SITE LOCATION - PUNE

DWG. NO. : NIHVA/21-22/CLT/0279 | REV- 00

SCALE: NTS | WT: | SHEET: 01 OF 01