



COLOR : RAL 1004 (GOLDEN YELLOW)	
CAPACITY	2 TON
PLATFORM SIZE	2000(L) X 2000(W)
POWER PACK	3 HP, 3 PH
SHUT HEIGHT	500 MM
LIFT HEIGHT	1500 MM
OPEN HEIGHT	2000 MM

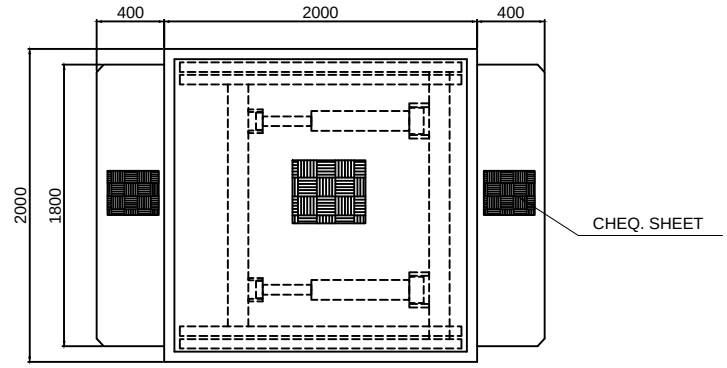

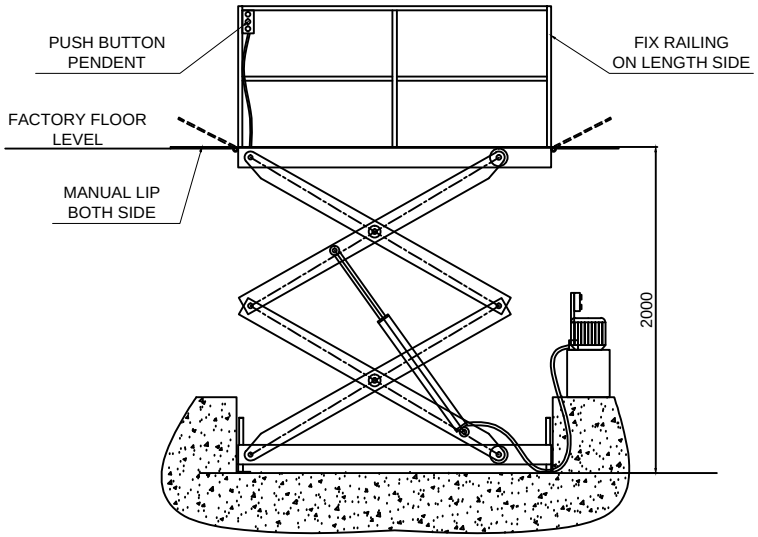

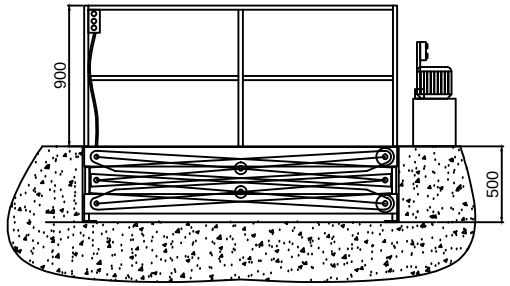

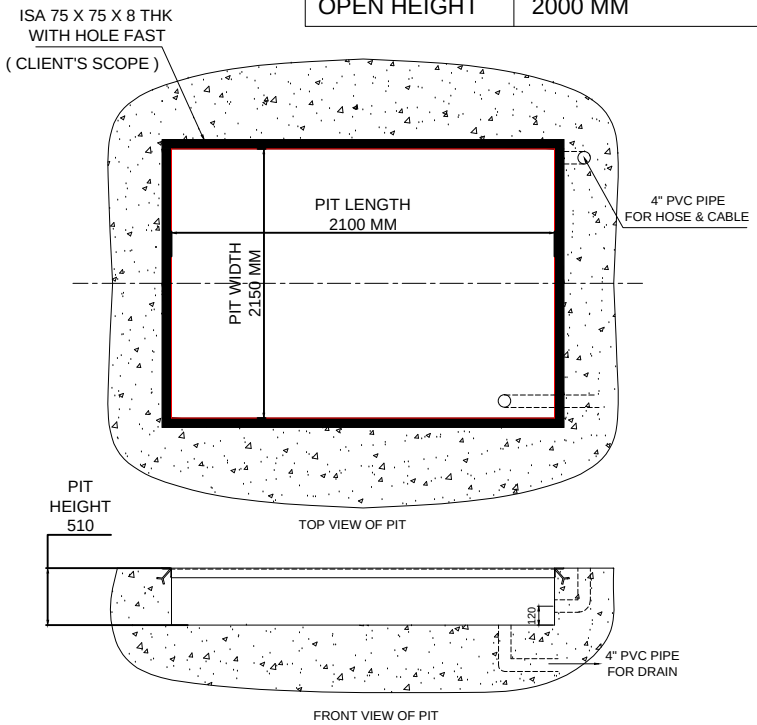

1. Painting coat details to be provided - 1 COAT OF PRIMER & 2 COATS OF ENAMEL FINISH PAINT.
2. Operating system: Electrical (or) Manual (or) Pneumatic (or) Hydraulic to be specified. - ELECTRO HYDRAULIC SCISSOR LIFT.
3. Operating system details to be provided - ELECTRO HYDRAULIC SYSTEM IS PROVIDE.
4. Cable details to be provided - 4 CORE X 2.5 SQ. MM & 2 CORE X 1 SQ.MM - 2 MTR & 4 CORE X 1 SQ.MM & 2 CORE X 1 SQ.MM - 5 MTR.
5. Supply power voltage will be 415V, confirm same. - OK.
6. Location of mortar to be consider at warehouse wall. - 5 MTR FROM PIT.

TOLERANCE - ±10mm

NOTE :-
1. PIT LEVEL SHOULD PARALLEL.
2. PROVISION OF 75 MM SPACE IN PIT ON BOTH LENGTH SIDE IS FOR INSTALLATION PURPOSE.
3. FLEXIBLE HOSE LENGTH - 7 MTR FROM CYLINDER.
4. MAIN SUPPLY CABLE WILL BE IN CLIENT SCOPE.

REV NO	REV DATE	DRAWN	REMARK
R01	24.10.2019	P.A	1. DETAIL ADDED
R01	24.10.2019	P.A	1. CLIENT DETAIL ADDED

CONSULTANT : MEINHARDT INDIA.

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE
SCISSOR LIFT GA DRAWING

NIHVA TECHNOLOGIES PVT. LTD.

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

	NAME	SIGN	DATE
DRAWN	P.V.A		17.06.2019
CHECK	V.M.T		17.06.2019
APPRD.			

CLIENT/CONTRACTOR - RMK INFRA STRUCTURE PVT LTD
PROJECT - CONTINENTAL POWERTRAIN GREENFIELD
SITE LOCATION - TALEGAON, PUNE
If any queries contact : design@nihva.com
DWG. NO. : NIHVA/19-20/0031/R01 REV- R01
ALL DIMENSION ARE IN mm
SCALE: NTS WT: SHEET: 01 OF 01