

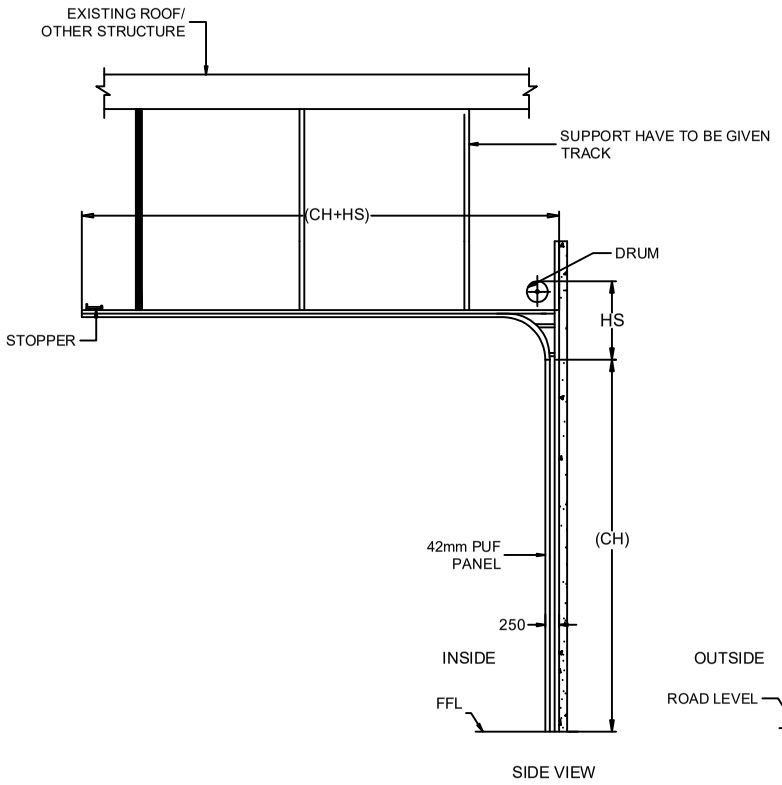



SIDE VIEW

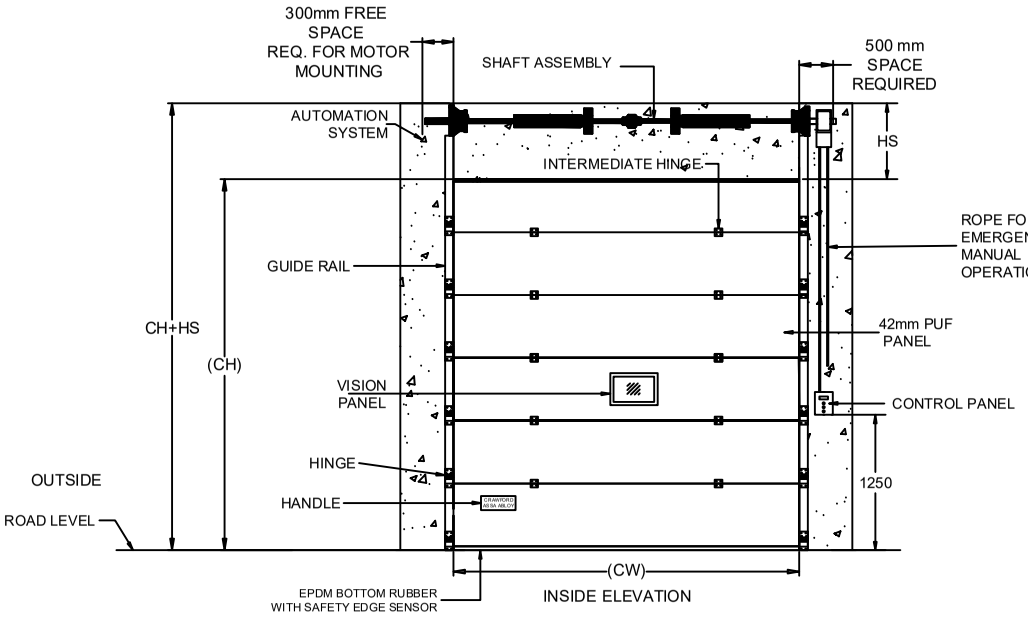

INSIDE ELEVATION

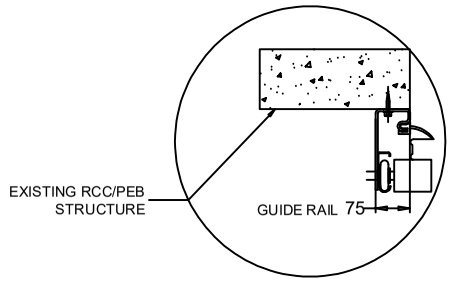

TRACK DETAILS

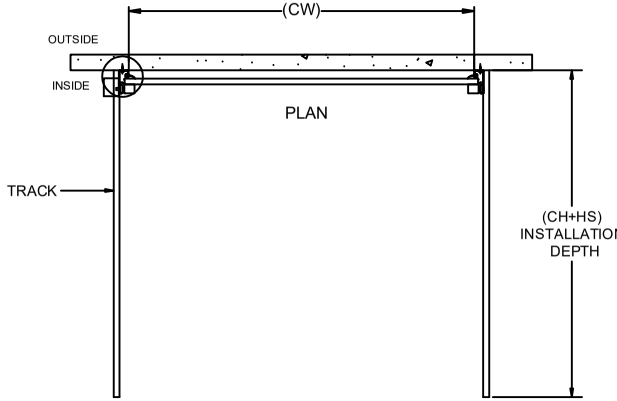

Power supply- Single phase 230V,50Hz
UPS capacity- 2KVA/Door

Standard Color for Door panel will be RAL 9006

DIMENSION :

Sr.No	Loction	Clear Width	Clear Hight	Header Space
1	VM No 40	5000	3140	250
2	VM No 45	5000	3050	250
3	VM No 60	5010	3050	250
4	VM No 61	5000	3160	250
5	VM No 62	5015	3160	250
6	VM No 11x1	4950	2820	Site not ready
7	VM No 11x2	5015	3050	400
8	VM No 12x1	5015	2850	400
9	VM No 12x2	5010	3030	400
10	VM No 13x1	5045	2830	400
11	VM No 13x2	5020	3020	400
12	VM No 14x1	5090	2830	400
13	VM No 14x2	5020	3030	400

TECHNICAL DATA :

COMPONENTS	MATERIALS	SPECIFICATIONS
DOOR PANELS	GI & PUF	42mm CFC- FREE POLYURETHANE WITH 0.5mm THK, GI PRECOATED PANELS.
DOOR HINGE	——	HEAVY DUTY HINGES FOR INTERLOCKING OF PANELS
SHAFT ASSEMBLY	STD.	TORSIONAL SPRING WITH SHAFT & BEARING PLATES
FINISH		PANELS WILL BE COLORED IN STANDARD RAL SHADE APPROVED BY CLIENT.

ACCESSORIES-
1. SAFETY EDGE SENSOR.
2. MANUAL ROPE
3. SPRING BREAK DEVICE (SPRING FAILURE PROTECTION)
4. TWO WINDOW
5. ANY POINT STOP (DEADMAN CONTROL)
6. UP/DOWN KEYPAD + STOP BUTTON
7. LOCK BOLT LOCKS THE DOOR FROM THE INSIDE
8. KEY SELECTOR,PULL CORD, REMOTE

IMPORTANT NOTES:

1. SINGLE PHASE POWER SUPPLY REQUIRED AT DOOR LOCATION.
2. ALL CIVIL WORK SHALL BE CLIENT'S SCOPE.

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Email:- info@nihva.com
Website:- www.nihva.com

TITLE:

OVERHEAD SECTIONAL DOOR

CLIENT - Panchshil

PROJECT -

SITE LOCATION -

DWG. NO. : NIHVA/24-25/00XX

SCALE: NTS	WT:	SHEET:1 OF 1	REV- 0

	NAME	DATE	SIGN
DRAWN	S.J	10/06/2024	
CHECK	B.B	10/06/2024	
APPROVAL	V.T.	10/06/2024	

If any queries contact : design1@nihva.com

NOTE: ALL DIMENSIONS ARE IN mm

THIS DRAWING & DESIGNING IS THE PROPERTY OF NIHVA TECHNOLOGIES. NOT TO BE SOLD OR COPIED TO ANY OTHER CONCERN.