


DOCK LEVELER SIZE	WIDTH (W)	LENGTH (L)	HEIGHT (H)	LIP (C) LENGTH	BUFFER SIZE (OPTIONAL)
	2000	2500	480	400	200X300X100


PIT DIMENSION	WIDTH (W 1)	LENGTH (L 1)	DEPTH (D)	ALL DIMENSIONS ARE IN mm
	2050	2500	485	

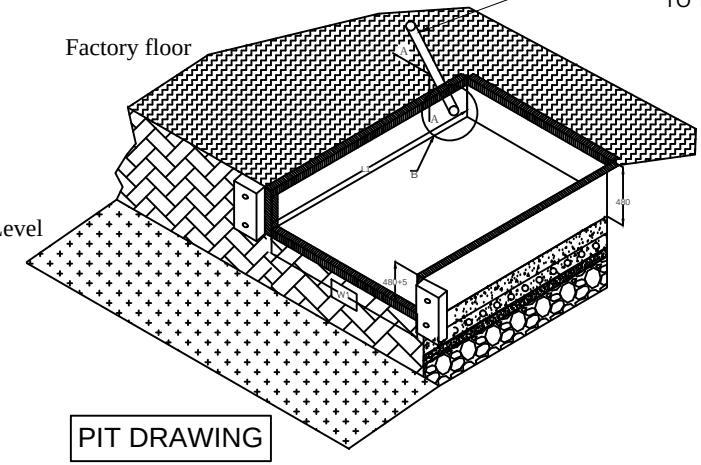


PIT DRAWING

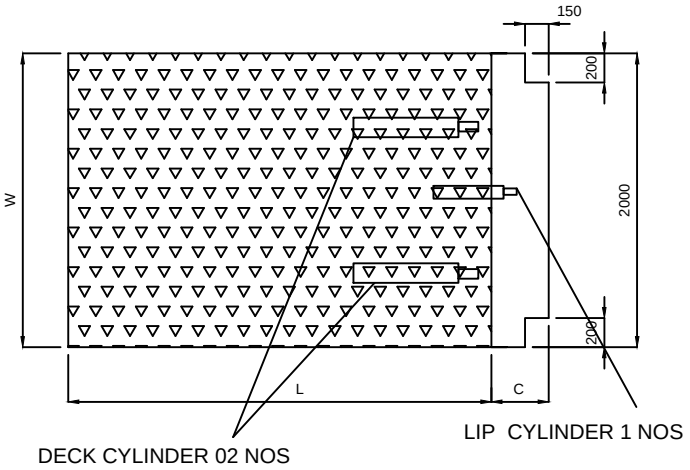

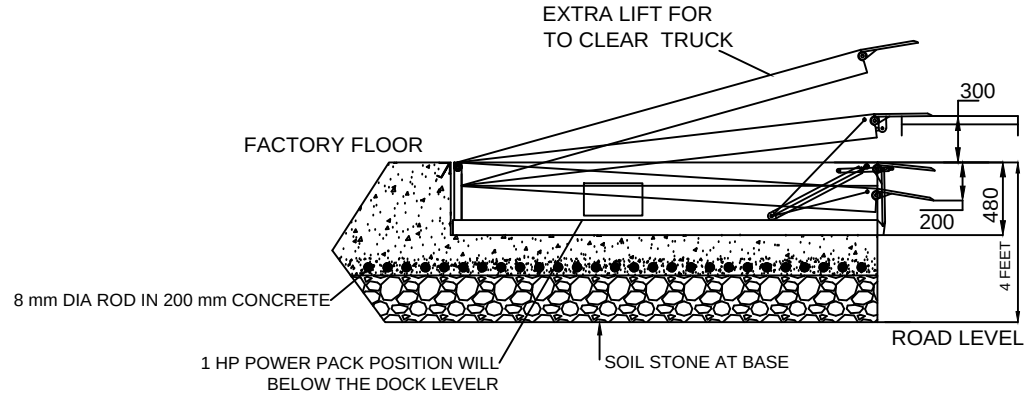



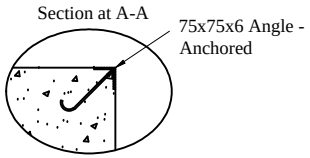

NOTE: -

1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY CABLE LENGTH STD. 5000 MM)
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 12000 KG FLOOR LOADING
4. MOUNTING ARRANGEMENT FOR BUMPERS SHOULD BE MADE AS PER BUMPER DRAWING (IF ORDERED)
5. FABRICATION TOLERANCE FOR PLATFROM SIZE WILL BE + 10 MM

DOCK LEVELER- 10 TON CAPACITY

IMP NOTE: -

1.PLEASE NOTE THAT THE CAPACITY OF DOCK LEVELER CONSIDERED IS THE CAPACITY AFTER THE LIP IS RESTED ON THE VEHICLE.
2.CYLINDERS PROVIDED ARE INTENDENT TO BE USED ONLY FOR LIFTING OF BARE DOCK & CAN NOT LIFT OTHER LOADS.

TOLERANCE :- ± 10mm

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE	DOCK LEVELER			NIHVA TECHNOLOGIES PVT. LTD. PUNE
				NIHVA TECHNOLOGIES PVT. LTD. Website:- www.nihva.com Tel : 020 66304033 Email:- info@nihva.com
	NAME	SIGN	DATE	
DRAWN	P.A		23.07.2020	CLIENT - ARCHIVISTA ENGINEERING PROJECTS PVT. LTD.
CHECK	G.J		23.07.2020	PROJECT -
APPRD.				SITE LOCATION -
If any queries contact : design@nihva.com				DWG. NO. : NIHVA/20-21/0036 REV- 00
ALL DIMENSION ARE IN mm				SCALE: NTS WT: SHEET: 01 OF 01