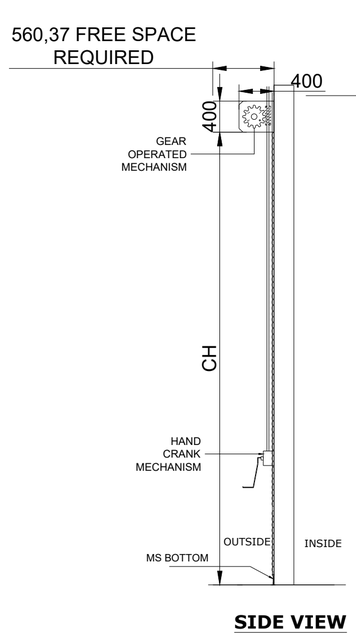
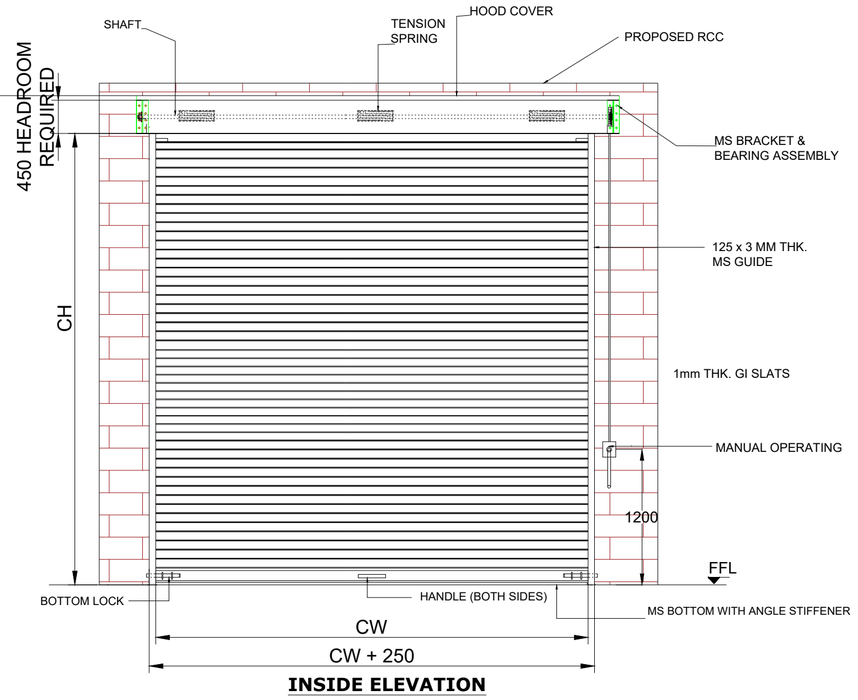
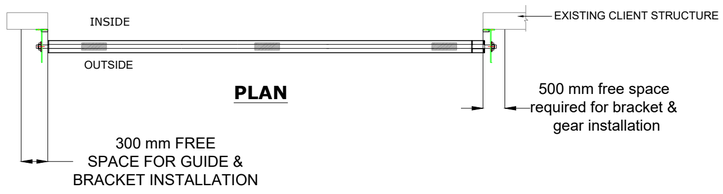
DRAWING





**SIDE VIEW**



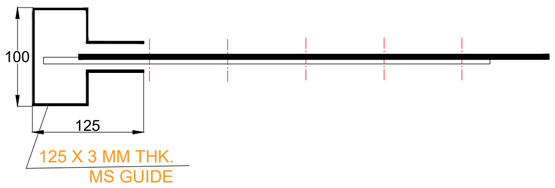

**INSIDE ELEVATION**




**PLAN**




**M.S. BOTTOM RAIL PROFILE 2.5MM**




" T " TYPE GUIDE

NOTE-
1. ALL CIVIL WORK WILL BE CLIENT'S SCOPE.
2.IF STRUCTURE REQUIRED FOR SHUTTER IS IN CLIENT'S SCOPE.

# TECHNICAL SPECIFICATION:-

| SPECIFICATION | DETAILS |
|---|---|
| DESCRIPTION & DRIVE | GEAR OPERATED SHUTTER |
| LOCATION AREA | INSIDE AREA / OUTSIDE AREA |
| MOUNTING SURFACE | SIDE BRACKETS: ON CONCRETE |
| SLAT | 75 MM WIDE - 1.2 MM THICK GI |
| BOTTOM PROFILE | M.S. PLATE 100X3.15 MM THICK WITH ANGLE 35X35X5 MM THK |
| GUIDE PROFILE | M.S."T" SHAPE -100X125X3 MM THK . |
| HOOD COVER | MADE OF GI SHEET THICKNESS 0.9 MM. |
| MATERIAL FINISH | POWDER COATING DFT 90 TO 130 MICRONS |

## SHUTTER SIZES :- (FOR UTILITY BUILDING)

| SR NO | ( CW ) CLEAR WIDTH | ( CH ) CLEAR HEIGHT | QUANTITY |
|---|---|---|---|
| 1 | 3000 | 4000 | 04 NOS |

| RIVISION. | DATE |
|---|---|
| REV 01 : SLAT THICKNESS CHANGE 1MM TO 1.2MM<br>BOTTOM PLATE THICKNESS CHANGE 2.5MM TO 3.15MM<br>ANGLE STIFFENER CHANGE 35X35X3 MM TO 35X35X5 MM | 03-12-2025 |

NOTE :

GALVANISATION SHALL BE MIN 230 g/SQ.M
HANDLE SHOULD BOTH SIDE
DFT RANGE IS 90 TO 130 MICRONS.

SPECIAL INSTRUCTION'S :

TITLE - DOOR AUTOMATION

DWG NO - NTPL- 300-PM-01

NIHVA TECHNOLOGIES PVT.LTD.PUNE
Website - www.nihva.com

| | NAME | SIGNATURE | DATE |
|---|---|---|---|
| DRAWN | V.W. | | 08-11-2025 |
| CHK'D | B.S. | | 10-11-2025 |
| APPV'D | V.T. | | 10-11-2025 |

PRODUCT - GEAR OPERATED SHUTTER
PROJECT NO - NTPL- 300 | REVISION - 01
SITE LOCATION-GUJARAT | WEIGHT - 291 kg
MATERIAL - G.I+MS | QTY - 04 NOS
IF ANY QUERIES CONTACT - Design@nihva.com | PROJECTION METHOD | SCALE :
ALL DIMENSIONS ARE IN 'MM' | A2 | SHEET 1 OF 1