INSTALLATION & MAINTENANCE MANUAL

FOR

ELECTRO HYDRAULIC DOCK LEVELER

CLIENT : - AEGIS INFRA SOLUTIONS

PROJECT : - PUNE

MFG.MONTH & YEAR : - AUGUST 2020

DESIGNED, DEVELOPED & MARKETED,

BY,

NIHVA TECHNOLOGIES PVT. LTD
G-BLOCK, 1ST FLOOR, THERMAX CHOWK
MIDC, ABOVE RENAULT SHOWROOM
CHINCHWAD, PUNE-411019

TEL.NO. - +912066304033
EMAIL: -info@nihva.com
www.nihva.com

A. DESPATCH & UNLOADING:-

1. Loading, for dispatch, will be our responsibility. On receipt of the Dock-leveler at site, please check and ensure that there is no physical damage to the equipment.

2. While unloading the equipment from the transporting vehicle, please ensure to use slings with rated capacity higher than the gross weight of the Stationary lift in packed condition.

3. Slings MUST be hooked ONLY at specified positions. These positions are indicated and marked with a figure of 'HOOK'. Improper sling position or improper slinging could cause damage to the equipment & serious accidents.

B. ORDERING OF SPARES:-

1. When ordering for spare, please specify the following in your Purchase Order.

   - Equipment Name
   - Model Number
   - Equipment Serial No.
   - Part name / Description
   - Part Number
   - Quantity required
   - Delivery period / time
   - Mode of dispatch

   This would avoid ambiguity and help us serve you better.

DATASHEET FOR DOCK LEVELER:-

CLIENT: - AEGIS, PUNE.

1.0 CONSTRUCTION DETAILS

1.1 Required Capacity - each	: 9 ton
1.2 Model No.	: NDL627
1.3 Leveler operation mode	: Hydraulically with AC operated.
1.4 Lip operation mode	: hydraulic
1.5 Operation control	: by push buttons and control panel
1.6 Loading platform height from road Level	: 4 Feet (Will be confirmed during Detailing)
1.7 Travel above & below dock level	: (+) 300 / (-) 200 mm
1.8 Platform Size (L x W)	: 3000 x 2500 mm
1.9 Lip size - (L x W)	: 1800 x 300 mm & 345 X 300 mm
1.10 Working length	: 3000 mm
1.11 Overall length	: 3300 mm
1.12 Maximum slope can be achieved	: 8 to 10%
1.13 Clear Pit dimensions (L x W X D)	: 3000x 2540x 560 mm
1.14 Hydraulic power pack	
1.14.1 Driver type	: Direct by FLP electric Motor
1.14.2 Absorbed power	: 0.75 kW
1.14.3 FLP Motor Ratings	: 0.75/1 kW /HP
1.14.4 Degree of protection for motor	: IP 55
1.14.5 Motor RPM	: 1410
1.14.6 Pump design	: 1.6 cc/rev.
1.14.7 Pump pressure	: 200 (max) Kg/cm²g
1.14.8 Safety valve set pressure	: 90 Kg/cm²g
1.14.9 Pump type	: Gear
1.14.10 Valves required	: By vendor
1.14.11 Volume of oil receiver	: 5 Lit
1.14.12 First fill of oil / Qty	: By Vendor
1.14.13 Hydraulic tubing	: By Vendor
1.14.14 Instrumentation	: By vendor
1.14.15 Control panel	: By vendor

DOCK LEVELLER

INTRODUCTION: -

The hydraulic Dock Leveler is the result of many years' experience in materials handling engineering. "NIHVA" offers the best possible factor of safety with simple, easy to use controls. The high quality of manufacture gives a robust construction and many years of useful life. Each lip and platform movement can be individually controlled (or corrected) by push button.

The dock leveler can be set at any position. During loading, the Dock Leveler is in floating mode i.e. it follows the up/down movements of the vehicle deck. Even with lopsided vehicles, the Dock leveler lip will remain in contact, and toe-traps are avoided by the tilt built into the Dock Leveler.

The whole platform is designed to flex laterally adequately to adapt to sideways tilted vehicles. The leveler always seals perfectly to the lorry bed.

PRINCIPLE: -


Dock Leveler is an adjustable platform used between the transport vehicle and dispatch area of the warehouse of factory for efficient and safe material transfer applications. It bridges the gap between the dispatch area and the transport vehicle and compensates for variations in the truck bed height.

PRE – OPERATING INSTRUCTIONS: -

1. Ensure Hydraulic Oil in the power pack.
2. Ensure Motor connection and proper earthing.
3. Ensure joint leakage.
4. Ensure proper location of platform and lip.

1

REVERSE THE TRUCK UPTO DISTANCE
OF 150 - 200 MM FROM THE D/L LIP

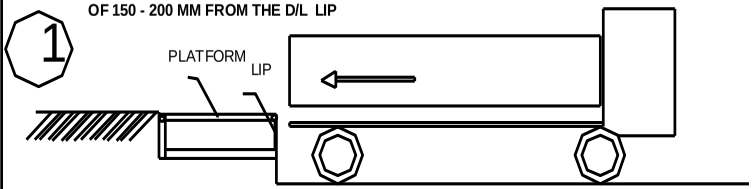


NOTE : ENSURE THAT EDGES OF TRUCK LOAD BODY ARE OUTSIDE LIP WIDTH
I.E. CHECK ALIGNMENT OF LIP WITH TRUCK BODY.

2

HOLD PLATFORM UP BUTTON IN PRESSED
POSITION.


PLATFORM WILL BE LIFTED TILL TOP MOST POSITION.

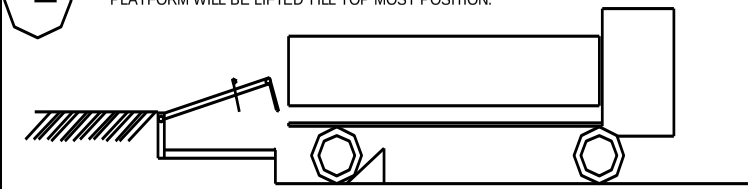

3

HOLD LIP UP BUTTON IN PRESSED POSITION.


LIP WILL BE LIFTED TILL IT STOP.

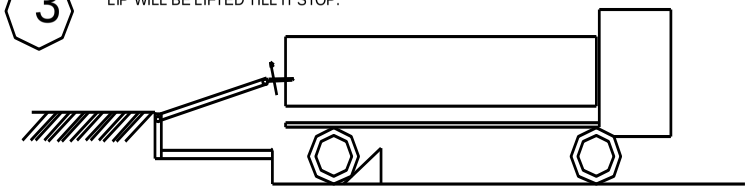

4

HOLD PLATFORM DOWN BUTTON IN PRESSED
POSITION.


LIP WILL BE RESTED ON TRCK BED.

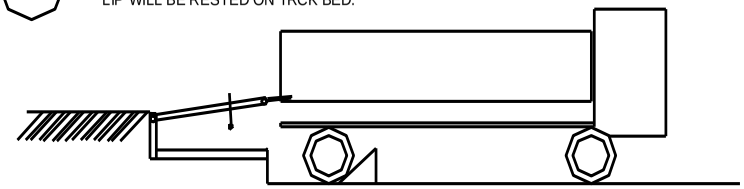

UNLOAD OR LOAD THE MATERIAL FROM THE TRUCK.


5

PRESS PLATFORM UP TO CLEAR THE LIP
FROM TRUCK BED THAT TIME THE LIP WILL
COME DOWN .

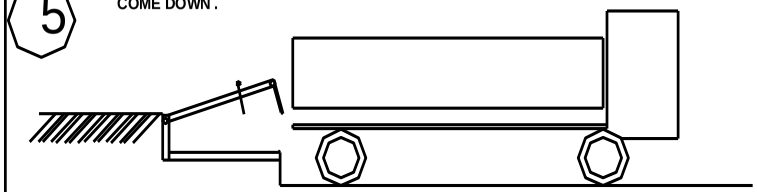

6

DRIVE THE TRUCK AWAY FROM D/L.

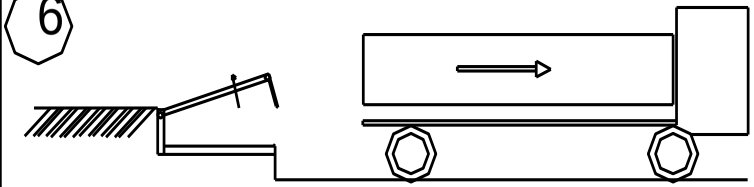

7

HOLD PLATFORM DOWN BUTTON .

LIP WILL BE PARKED TO ITS ORIGINAL POSITION.



OPERATING INSTRUCTION FOR DOCK- LEVELER.

NIHVA TECHNOLOGIES PVT. LTD.

ROUTINE MAINTENANCE AND LUBRICATION

These recommendations are applicable to the Dock Leveler considering average daily usage of 15 to 20 times. If it is used more frequently, the same time intervals for the maintenance should be adjusted accordingly.

DAILY: -

1. Check Hydraulic pipe lines for leak proof working.
2. Check electrical connections for their proper working.


MONTHLY: -

1. Grease the hinge pins at bottom frame and top plate joint and extension lip plate hinge joint.
2. Grease the main Jack Cylinder and Lip Jack Cylinder, Top and Bottom pins if some frictional sound hears.
3. Change Hydraulic Oil (servo 68) viscosity from hydraulic expert & change if required.

ASSEMBLIES & SPARE PARTS LIST: -

1. GA DRAWING.
2. HYDRAULIC POWER PACK DETAILS & CIRCUIT.
3. ELECTRICAL CIRCUIT.

GA DRAWING:-

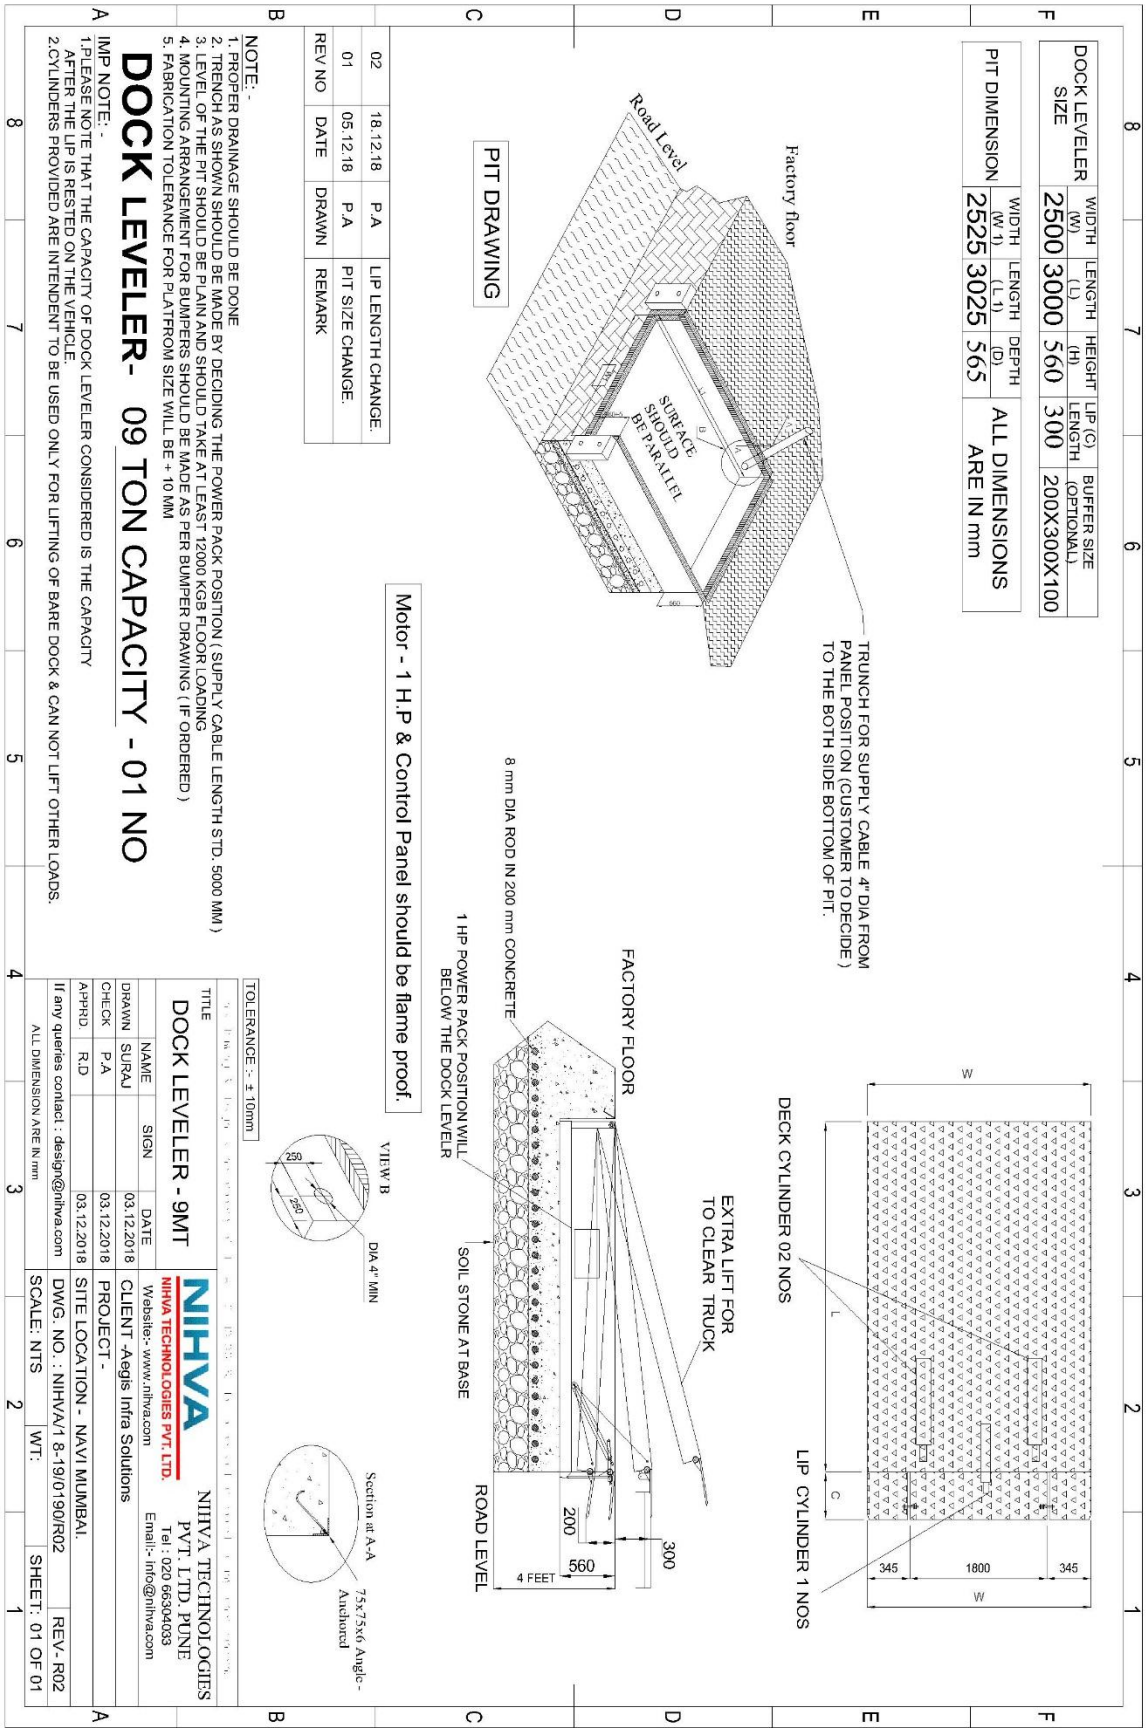

REV NO	DATE	DRAWN	REMARK
02	18.12.18	P.A	LIP LENGTH CHANGE.
01	05.12.18	P.A	PIT SIZE CHANGE.

NOTE: -
1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY CABLE LENGTH STD. 5000 MM)
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 12000 KGB FLOOR LOADING
4. MOUNTING ARRANGEMENT FOR BUMPERS SHOULD BE MADE AS PER BUMPER DRAWING (IF ORDERED)
5. FABRICATION TOLERANCE FOR PLATFROM SIZE WILL BE + 10 MM

DOCK LEVELER- 09 TON CAPACITY - 01 NO

IMP NOTE: -
1.PLEASE NOTE THAT THE CAPACITY OF DOCK LEVELER CONSIDERED IS THE CAPACITY
AFTER THE LIP IS RESTED ON THE VEHICLE.
2.CYLINDERS PROVIDED ARE INTENDENT TO BE USED ONLY FOR LIFTING OF BARE DOCK & CAN NOT LIFT OTHER LOADS.

TOLERANCE :- ± 10mm

TITLE	DOCK LEVELER - 9MT		
	NAME	SIGN	DATE
DRAWN	SURAJ		03.12.2018
CHECK	P.A		03.12.2018
APPRD.	R.D		03.12.2018

If any queries contact : design@nihva.com

ALL DIMENSION ARE IN mm

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT -Aegis Infra Solutions

PROJECT -

SITE LOCATION - NAVI MUMBAI.

DWG. NO. : NIHVA/1 8-19/0190/R02


REV- R02

SCALE: NTS

WT:

SHEET: 01 OF 01

HYDRAULIC CIRCUIT& PART LIST:–

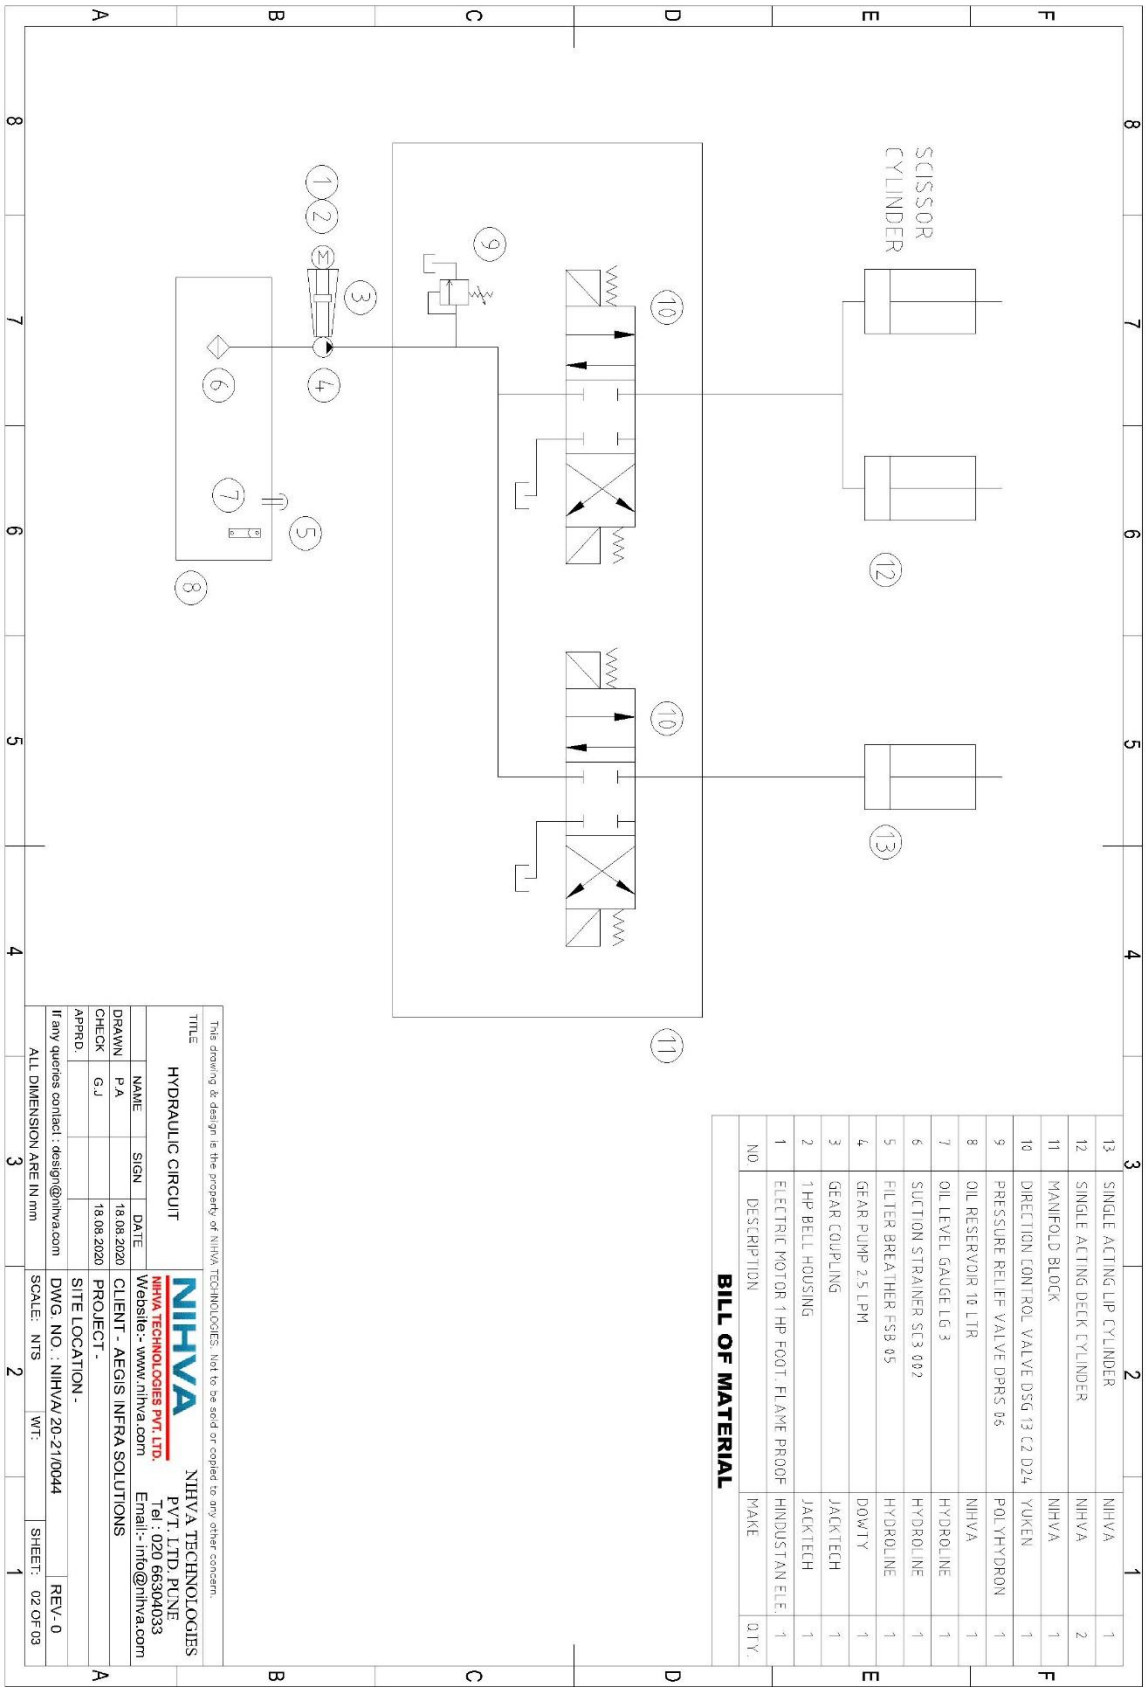

ELECTRIC CIRCUIT & PART LIST:-

