

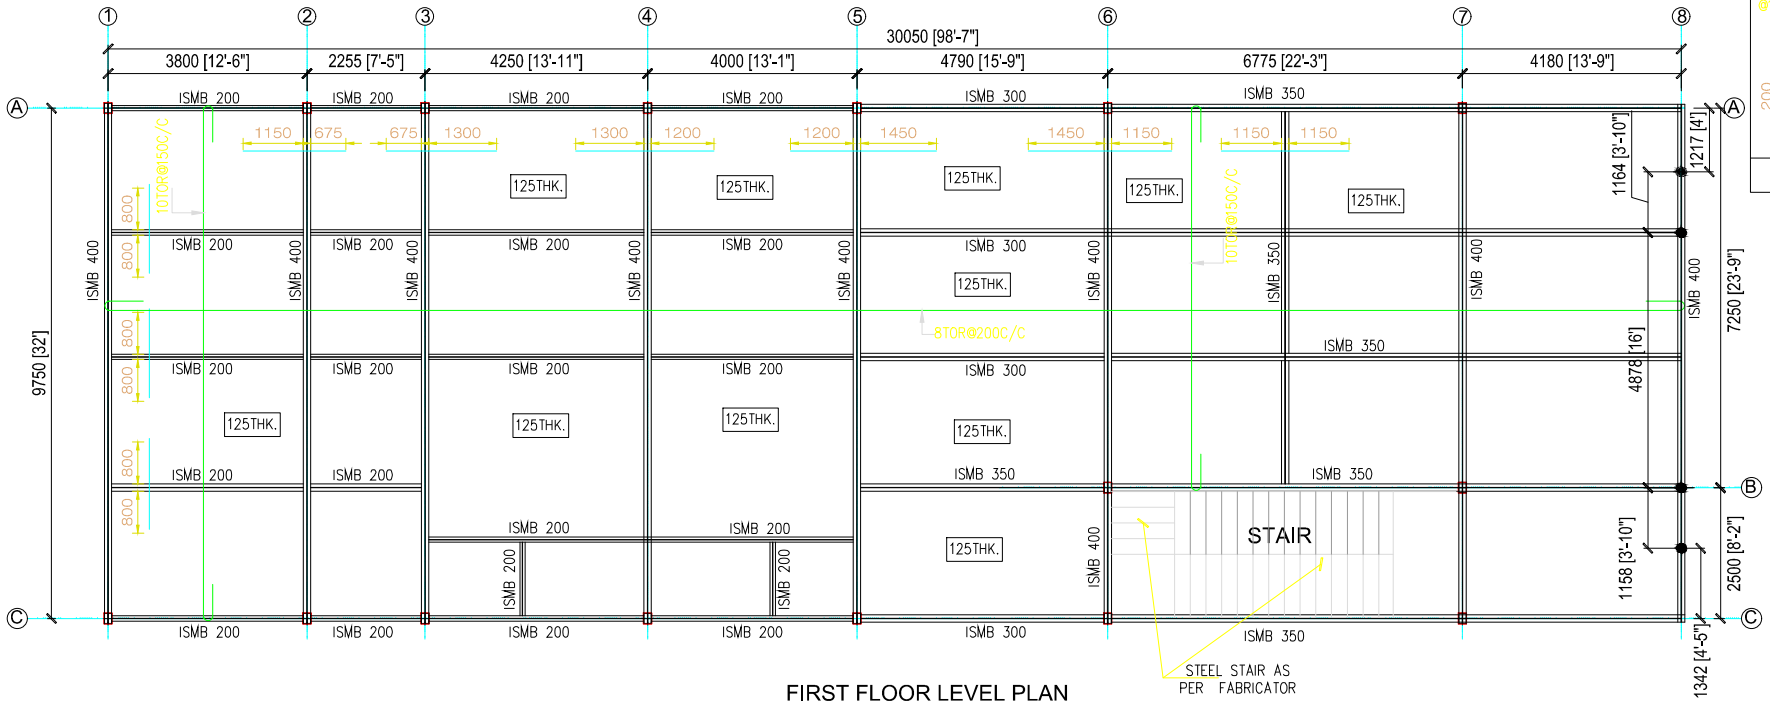


FIRST FLOOR LEVEL PLAN

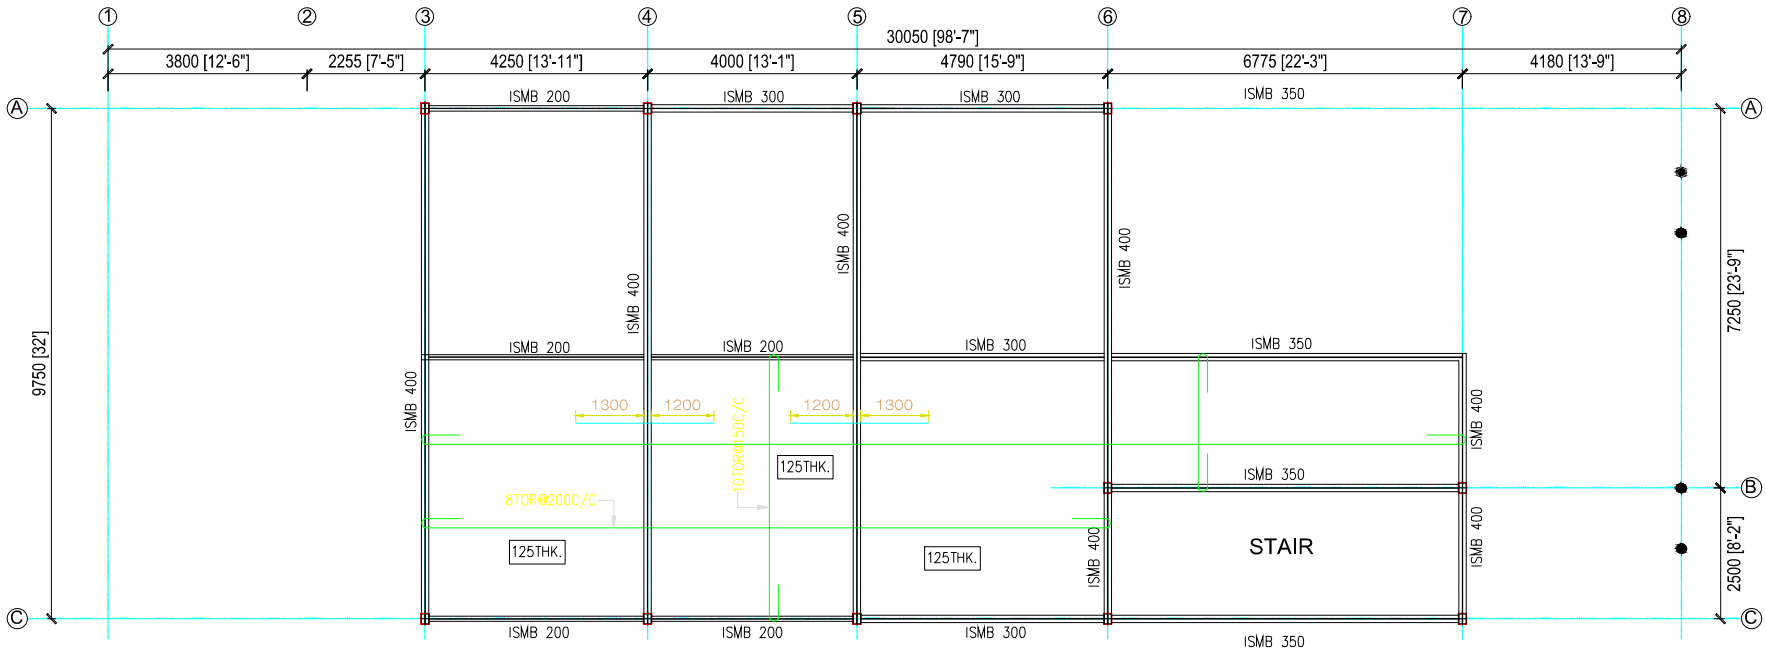

TERRACE FLOOR PLAN

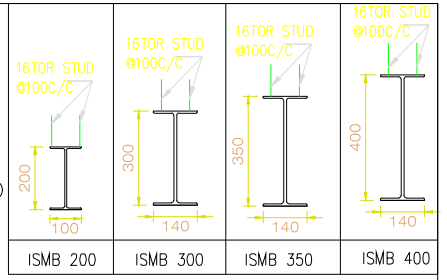

NOTES :-

1. ALL DIMENSIONS ARE IN MM NOTED OTHER WISE
2. ALL DIMENSIONS ARE TO BE READ NOT TO BE MEASURED
3. ALL STRUCTURAL STEEL WORKS SHALL CONFIRM TO IS: 800
4. ALL STRUCTURAL STEEL ROLLED SECTION & PLATE SHALL CONFIRM TO IS : 226 - 1975 & IS:2062-1980
5. WELDING SHALL CONFIRM TO IS 1969 WELDING ELECTRODES SHALL CONFIRM TO IS : 814 AND WELDING SYMBOL ARE AS PER IS 800
6. ALL MS BLOCK BOLTS & NUTS SHALL CONFIRM TO IS : 1363 PART (1TO3) 1984
7. ALL WELDS ARE 6 MM CONTINUOUS FILLET WELD UNLESS OTHERWISE NOTED
8. LENGTH OF WELDS SHOWN ARE MINIMUM LENGTH(150 MM) REQUIRED FOR THE MEMBER HOWEVER FULL CONTACT SURFACE OF GUSSET PLATES WITH MEMBERS ARE TO BE WELDED
9. AFTER FABRICATION ALL STRUCTURAL STEEL WORKS SHALL BE PAINTED WITH ONE COAT OF RED OXIDE ZINC CHROMATE PRIMER AND TWO COATS OF ALUMINIUM PAINT
10. ALL GUSSET PLATE 8mm THICK EXCEPT MARKED
11. ALL STRUCTURAL STEEL SHALL HAVE MINIMUM YIELD STRESS OF 250MPA.
12. ALL TUBLAR SECTION SHALL CORRESPOND TO IS :1161-1979.
13. GRADE OF TUBLAR STEEL SHALL GRADED TO YSt 310.
14. ASSUMED S.B.C. OF SOIL HAS BEEN TAKEN AS 140 KN/SQM AT A DEPTH OF 1.5 M. FROM NATURAL GROUND LEVEL. THIS SHALL BE CONFIRMED BEFORE STARTING THE WORK

REVISION DESCRIPTION	DATE

PROJECT :-

DR. ASHIR HUSAIN BANQUET HALL

BLDG. TYPE :-

BANQUET HALL

CLIENT :-

SHEET TITEL:-

FIRST FLOOR SLAB BEAM PLAN & TERRACE FLOOR SLAB BEAM PLAN

DRAWN BY :- SADDAM

STR. DRAWING No.:-S0-2

Designed By: ANIL KUMAR SARIAR

STRUCTURAL CONSULTANT :-

SHAMVWI CONSULTANT

414, JAGAT TRADE CENTRE FRASER ROAD, PATNA - 1

PH.:- 0612 - 2973107 (O) , FAX.:- 0612 - 2239464

MOB.:- 9835218184, 8986215718

E - mail : shamvwi@Gmail.com