	Title	Design Specification Sheet	Document No	PFR-DES-10
			Version No	2
			Revision No	2
	Classification	Reference - Format	Effective Date	6 May 21

Manufacturer: ASSA ABLOY

Description: RP300 MACHINE PROTECTION DOOR_2500W X2400H_ASSA ABLOY

Application : Leak Proof Shutter for CMT welding cell (OP20 & OP30), Pack Out Cell (OP170), CMM (OP160) & Leak Test

Technical Specifications:

1. Welding Component: Battery Tray (Aluminium Alloy)
2. Loading & Unloading of component done by robot.
3. Vertical motorised Rolling Shutter for part loading & unloading shall confirm following criteria,
   - Shutter Material: Non Metallic / Fabric.
   - Shutter Shall be leak Proof / air tight.
   - Shutter shall be open/ close within 6 sec.
   - Shutter Opening Size shall be 2500 (W) x 2400 (H)
   - There Shall be fix panel till height of xxx mm below door. (Height will be confirmed by WiproPARI during DAP)
   - Motor for Rolling Shutter shall be with Brake .
   - Shutter movement should be smooth.
4. Supplier should share complete structure drawing after receiving PO within 2 days.
5. Shutter mounting cell is in Wipro PARI scope.
6. Motor & shutter shaft shall be covered with appropriate cover.
7. Shutter motor should be controlled by VFD and Safety Door switch as follows :
   - VFD G120D CONTROL UNIT 6SL3544-0FB21-1FA0 SIEMENS
   - VFD POWER MOD 0.75KW 6SL3525-0PE17-5AA1 SIEMENS (power module size depending on motor rating).
   - SAFETY SWITCH CES-AP-CO1-AH-SB-111145 EUCHNER
   - ACTUATOR CES-A-BPA 098775 EUCHNER

System Operating Hours : Working hours of the system are as mentioned below:

1. Annual Working Days- 275
2. Working hours per shift – 7.5
3. No of shifts/day (hrs./day)- 3 (7.5 x 3 = 22.5 hrs./day)

Rev.No	Date	Revision Details	Revision by	Approved by


PROJECT (If any)		PART / SPECIFICATION DESCRIPTION	
PRV58		RP300 MACHINE PROTECTION DOOR_2500W X2400H_ASSA ABLOY	
DRN by	Date		
Mayur V./ Mayur C.	21/11/22		
CHKD by	Date	DRG No / ExDM Code / ERP Code	Rev. No.
Tushar P./ Manoj P.	21/11/22	11003NB14720	0
APRD by	Date		
Niteen T./ Atul P.	21/11/22	**SHEET NO: 1 OF 3**	

	Title	Design Specification Sheet	Document No	PFR-DES-10
			Version No	2
			Revision No	2
	Classification	Reference - Format	Effective Date	6 May 21

Manufacturer: ASSA ABLOY

Description: RP300 MACHINE PROTECTION DOOR_2500W X2400H_ASSA ABLOY

GA Drawing:

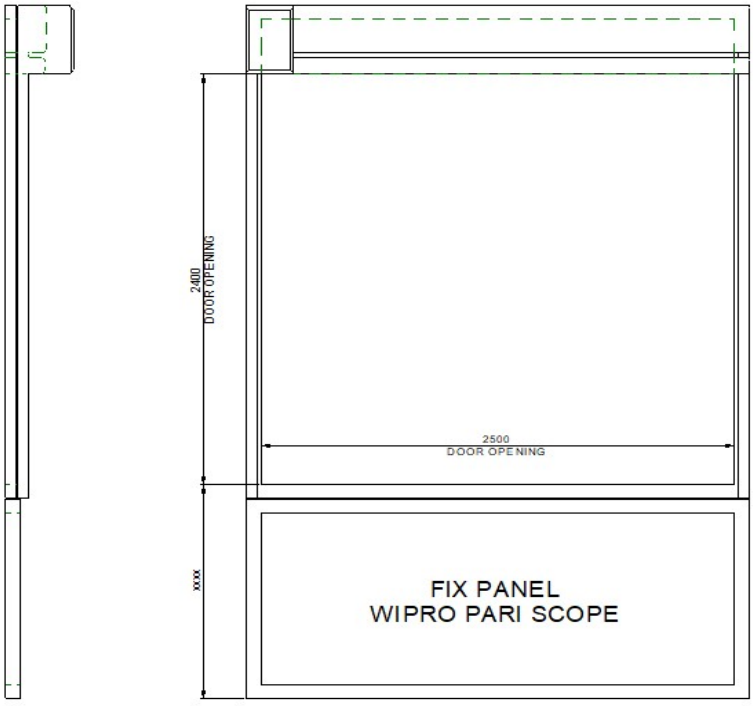

OP20 & OP30 DOOR

PROJECT (If any)		PART / SPECIFICATION DESCRIPTION	
PRV58		RP300 MACHINE PROTECTION DOOR_2500W X2400H_ASSA ABLOY	
DRN by	Date		
Mayur V./ Mayur C.	21/11/22		
CHKD by	Date	DRG No / ExDM Code / ERP Code	Rev. No.
Tushar P./ Manoj P.	21/11/22	11003NB14720	0
APRD by	Date		
Niteen T./ Atul P.	21/11/22	**SHEET NO: 2 OF 3**	

Manufacturer: ASSA ABLOY

Description: RP300 MACHINE PROTECTION DOOR_2500W X2400H_ASSA ABLOY

Scope Of Supply & Deliverables:

1)Design, Detail engineering, procurement of material, manufacturing, stage vise quality control, inspection, supply, erection & commissioning etc.

2)Project Documentation Binder (Hard Copy) with all electrical, pneumatic and mechanical Drawings (Eplan/ AutoCAD), CD ROM with all documentation in electronic form required in both English as well as Turkish Language.

3)One experted edition hard copy and detailed manual to be given on compact disc with detailed installation/ maintenance manuals covering settings information, function, schematic drawings, Preventive maintenance schedule, electrical circuit diagrams, bill of material & Safety Precautions & Procedures etc. in both English & Turkish Language should be supplied at the time of delivery.

4)One experted edition hard copy and soft copy on compact disc with technical/calibration certifications, & manufacturer's warranty.

5)Test Reports / calibration & CE Certificate (self certification or from external agency as per required) etc. for components as well as system should be provided along with shipment.

6)Necessary Utility (Air & Power) Requirement should be submitted within 2 weeks from receipt of PO, which include

- Electric Power supply requirement with Cable management scheme & Electrical/ Pneumatic connection, accessories detail.
- Drawing specifying mounting details of shutter & all accessories.

7)Supplier shall provide list of Spare & wear parts along with detailed Drawings, Cost, Expected life, Mean Time Between Failure, Mean Time To Repair & Shelf life.

8)Supplier shall provide list of consumable with specification, cost, Expected life, Frequency of replacement & Shelf life.

9)One additional set of consumables shall be provided.

10)For details of Bought out item make, refer Preferred Make List – Annexure 1 for mechanical item & Annexure 2 for control item. Any additional Bought out items (out side the Make List) & Deviation for item in list supplier shall seek approval from Wipro PARI within 2 weeks from PO.

11)Paint scheme will be confirm by Wipro PARI during DAP.

12)Supplier shall submit following Data during DAP

- Layout, construction Details.
- Detailed Cycle Time.
- Spare & Wear part Details.
- Control Architecture.

13)Supplier shall respond within 24 Hrs. in case of equipment failure with all required spares to put machine in operation.

14)Supplier shall support during installation to prove application till acceptance from end user / customer at WiproPari Shirwal & at Turkey; also should supply required consumables if any.

15)Provide suitable Electrical Plug as per Turkey Standard.

Wipro PARI Scope of Supply:

1) 3 Phase Power Supply 400V, 50Hz

Training:

During Acceptance Tests, training to customer staffs to be provided for system including but not limited to process, care to be taken for handling, Wear parts & process to change, consumables & process to change, operating the system & fault finding etc.

Packing :

The equipment should be packed safely, neatly with adequate air cushioning (Air bubble sheet packing) for safe transit.