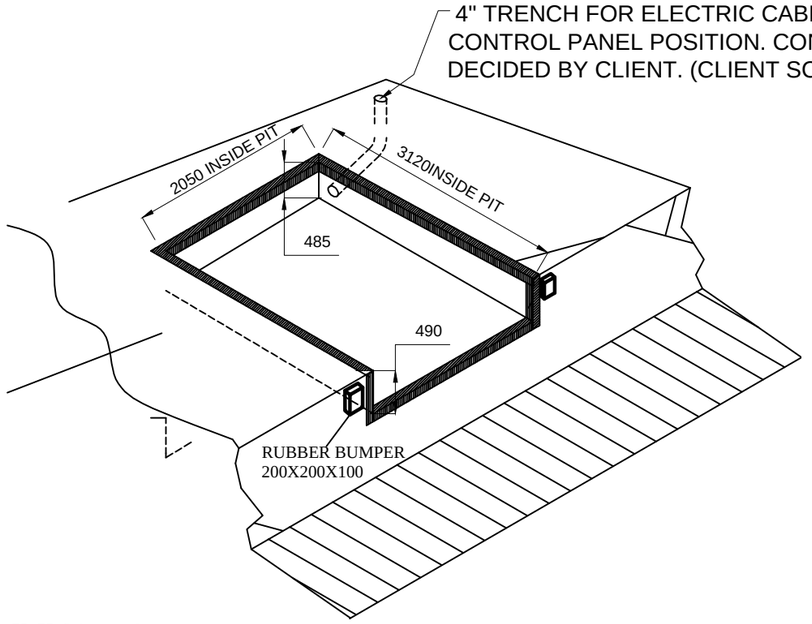


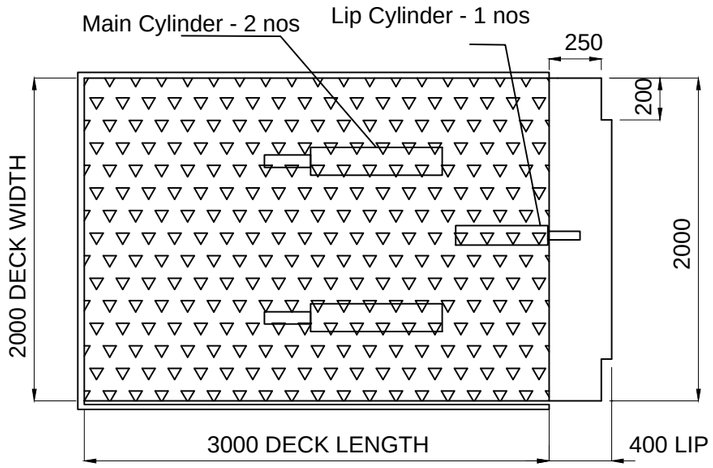


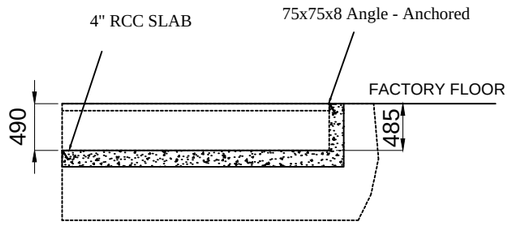


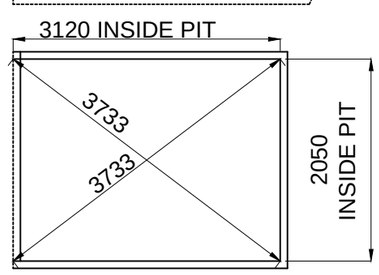


VIEW B

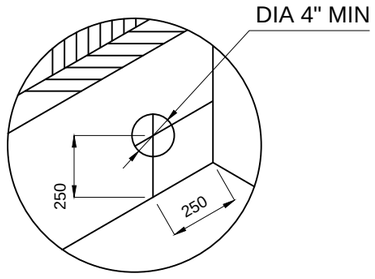


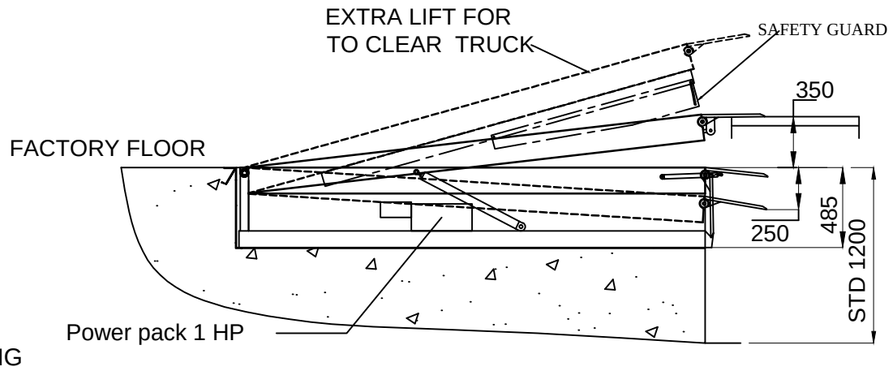


NOTE:
1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE CONTROL PANEL POSITION
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 18000 KGB FLOOR LOADING
4. FABRICATION TOLERANCE FOR PLATFORM SIZE WILL BE + 10 MM
5. PIT,DUCT FOR HOSES & ALL CIVIL WORK IN CLIENT SCOPE

SPECIFICATION OF DOCK LEVELER:
1. PLATFORM SIZE- 2000W X 3000L
2. LIFT ABOVE- 350 MM
3. LIFT DOWN- 250 MM
4. PIT SIZE- 2050W X 3120L X 485D
5. CAPACITY 6 TON
6. FINISH- HOT DEEP GALVANISING
7. QTY- TOTAL 4 NOS OF DOCK LEVELER (2NOS FOR PHASE 1 & 2 NOS FOR PHASE 2)

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

| TITLE | | | |
|---|---|---|---|
| PIT MOUNTED ELECTRO-HYDRAULIC DOCK LEVELER | | | NIHVA TECHNOLOGY PVT. LTD. PUNE<br>Tel : 020 66304033<br>Email:- info@nihva.com<br>Website:- www.nihva.com |
| | SIGN | DATE | |
| DRAWN | S.B. | 20.9.2021 | CLIENT - SHUBHSHREE ENGINEERING |
| CHECK | G.P. | 20.9.2021 | PROJECT - E+H |
| APPROVAL | A.K. | 20.9.2021 | SITE - |
| REV. | 03 | 08.1.2022 | DWG. NO. : NIHVA/21-22/208 |
| If any queries contact : design@nihva.com | | | SCALE: NTS \| WT: \| SHEET: 01 OF 01 |
| ALL DIMENSION ARE IN mm | | | |