

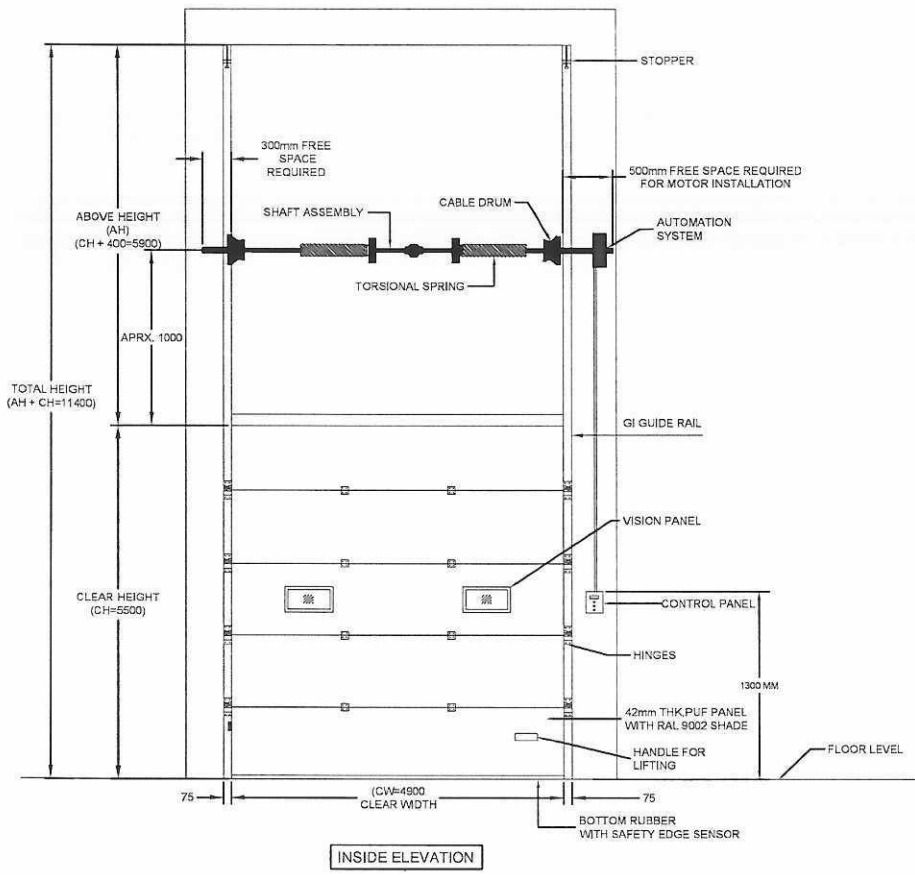



INSIDE ELEVATION

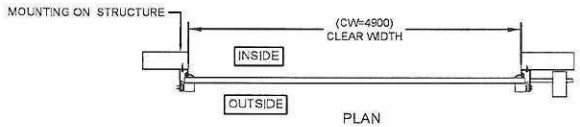

PLAN

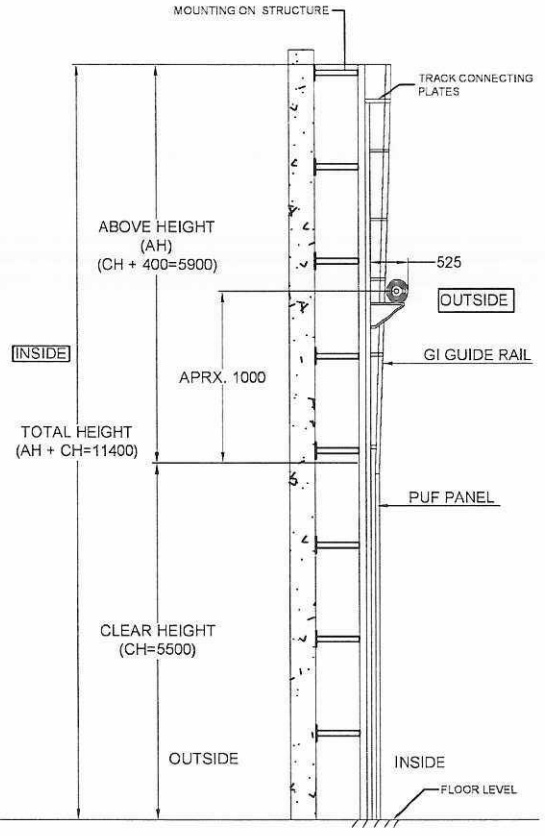

SIDE VIEW

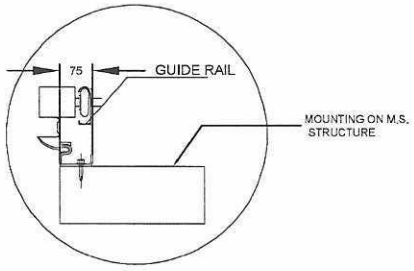

TRACK DETAILS

DIMENSION :

CLEAR WIDTH (CW)	CLEAR HEIGHT (CH)	QUANTITY
4900 mm	5500 mm	02No

TECHNICAL DATA :

COMPONENTS	MATERIALS	SPECIFICATIONS
DOOR PANELS	GI & PUF	42mm CFC- FREE POLYURETHANE WITH 0.5mm THK. GI PRECOATED PANELS.
DOOR HINGE	——	HEAVY DUTY HINGES FOR INTERLOCKING OF PANELS
SHAFT ASSEMBLY	STD.	TORSIONAL SPRING WITH SHAFT & BEARING PLATES
FINISH		PANELS WILL BE COLORED IN STANDARD RAL SHADE APPROVED BY CLIENT.

ACCESSORIES-
1. SAFETY EDGE SENSOR.
2. MANUAL ROPE.
3. SPRING BREAK DEVICE(SPRING FAILURE PROTECTION)
4.TWO WINDOWS.
5.ANY POINT STOP(DEADMAN CONTROL)

IMPORTANT NOTES:
1.SINGLE PHASE POWER SUPPLY REQUIRED AT DOOR LOCATION.
2.ALL CIVIL WORK SHALL BE CLIENT'S SCOPE.
3.REQUIRED STRUCTURE FOR DOOR IS IN CLIENT'S SCOPE.

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Email:- info@nihva.com
Website:- www.nihva.com

TITLE:
VL SECTIONAL DOOR

CLIENT'S APPROVAL :

CLIENT -

PROJECT -

SITE LOCATION - PUNE

DWG. NO. : NIHVA/22-23/0191

SCALE: NTS	WT:	SHEET:1 OF 1	REV- 0

	NAME	DATE	SIGN
DRAWN	S.B	13-01-2023	
CHECK	A.K.	13-01-2023	
APPROVAL	V.T.	13-01-2023	

If any queries contact : design1@nihva.com

NOTE: ALL DIMENSIONS ARE IN mm

THIS DRAWING & DESIGNING IS THE PROPERTY OF NIHVA TECHNOLOGIES. NOT TO BE SOLD OR COPIED TO ANY OTHER CONCERN.