
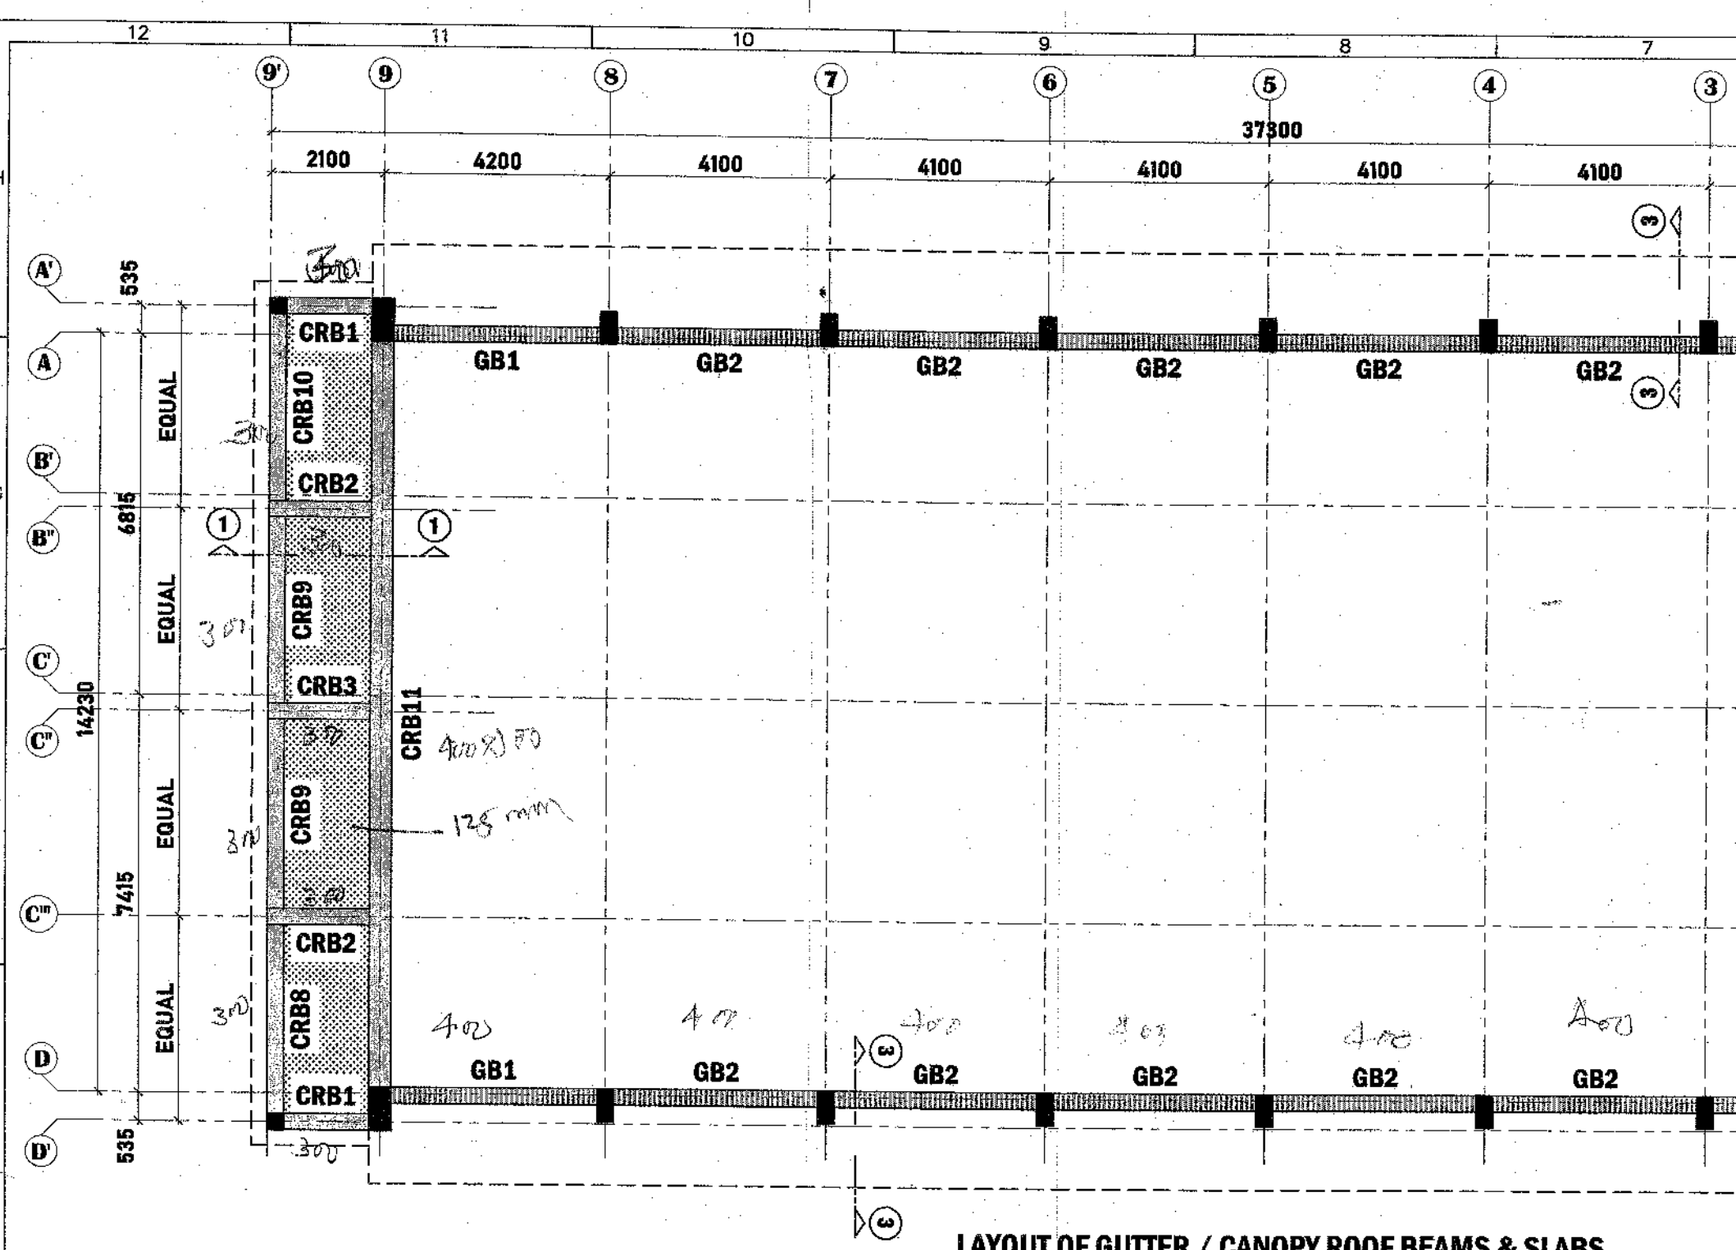


LAYOUT OF GUTTER / CANOPY ROOF BEAMS & SLABS

(BEAM TOP LEVEL AT 6.00 m FROM FFL, UNLESS SPECIFIED OTHERWISE)

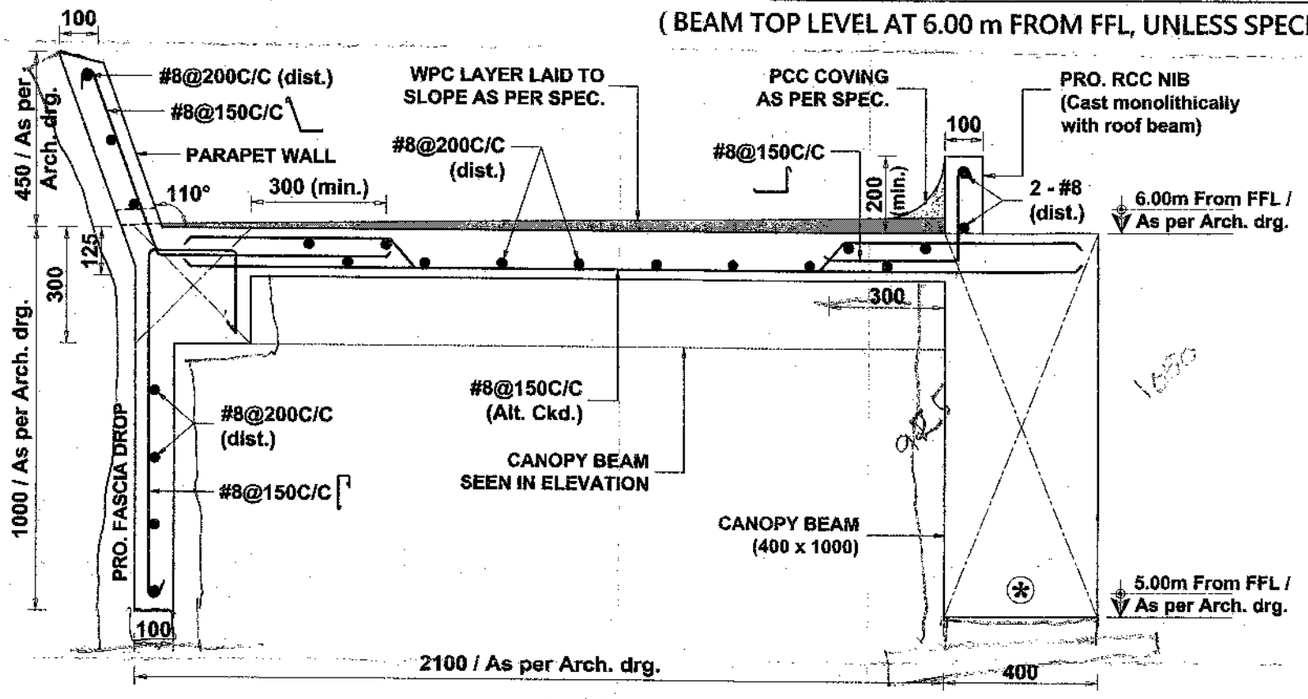


SECTION 1/1

(FOR SLIDING DOOR - SD, LEVEL AS PER ARCH. DRG.)

NOTE : ⊛


HOLDFASTS / ANCHORING PLATES Etc. FOR FIXING MOTORIZED SLIDING DOOR (AS PER VENDOR'S DRAWING) SHALL PREFERABLY BE EMBEDDED INTO RCC COLUMN / BEAM PRIOR TO CASTING.

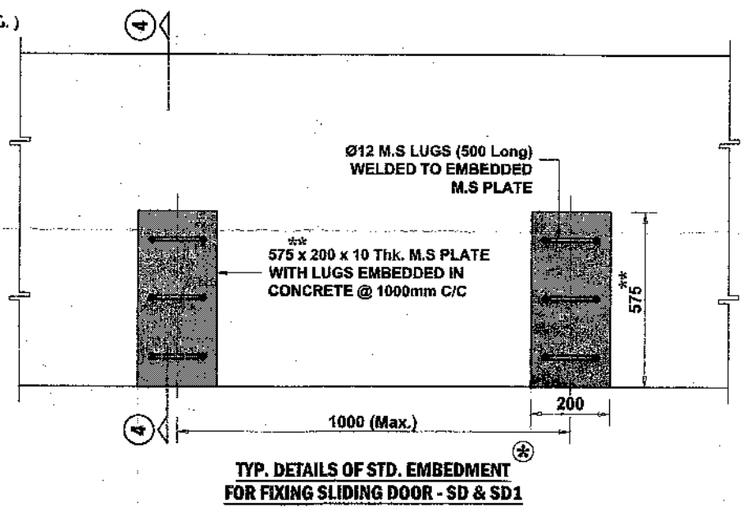

(**: Chk at Site / As per Vendor's drawing)

TYP. DETAILS OF STD. EMBEDMENT FOR FIXING SLIDING DOOR - SD & SD1

(REFER ARCH. DRG. FOR EXACT LOCATION / LEVEL)

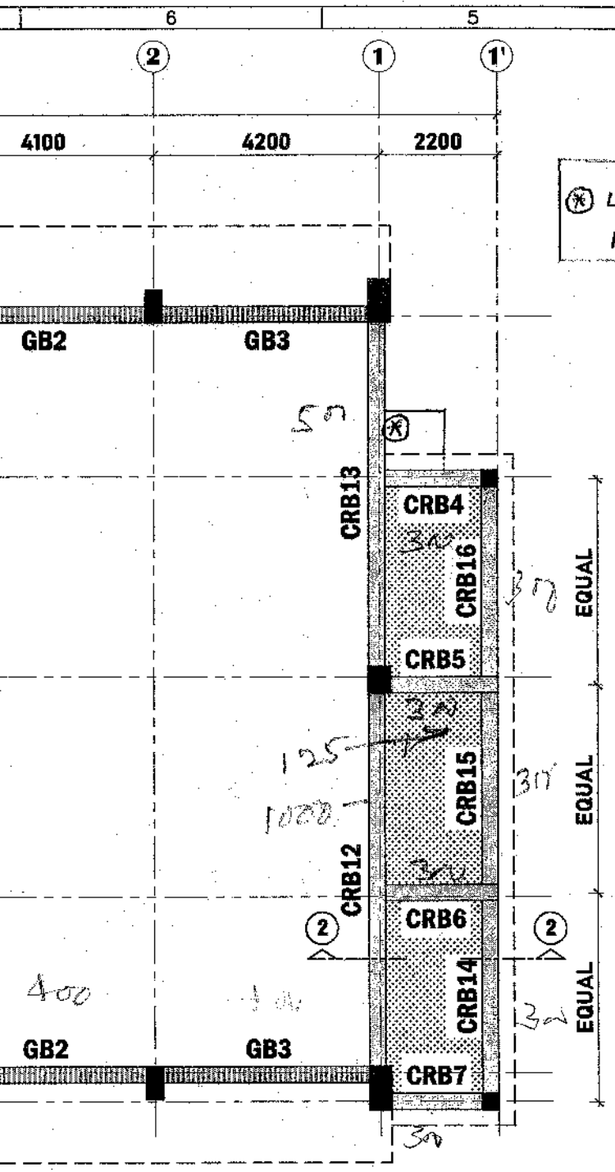


(*) LANDING SLAB FOR ACCESSING PRO. CAGE LADDER. REFER SEPARATE DRG. FOR DETAILS.

CANOPY ROOF SLAB (125 mm Thk.)


CANOPY BEAM TOP AT 6.00m FROM FFL

GUTTER BEAM TOP AT 6.00m FROM FFL

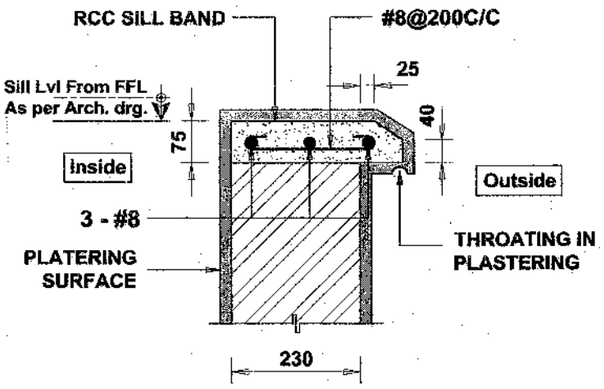


TYP. C/S OF RCC SILL BAND

(FOR VENTILATORS / AS PER REQUIREMENT)

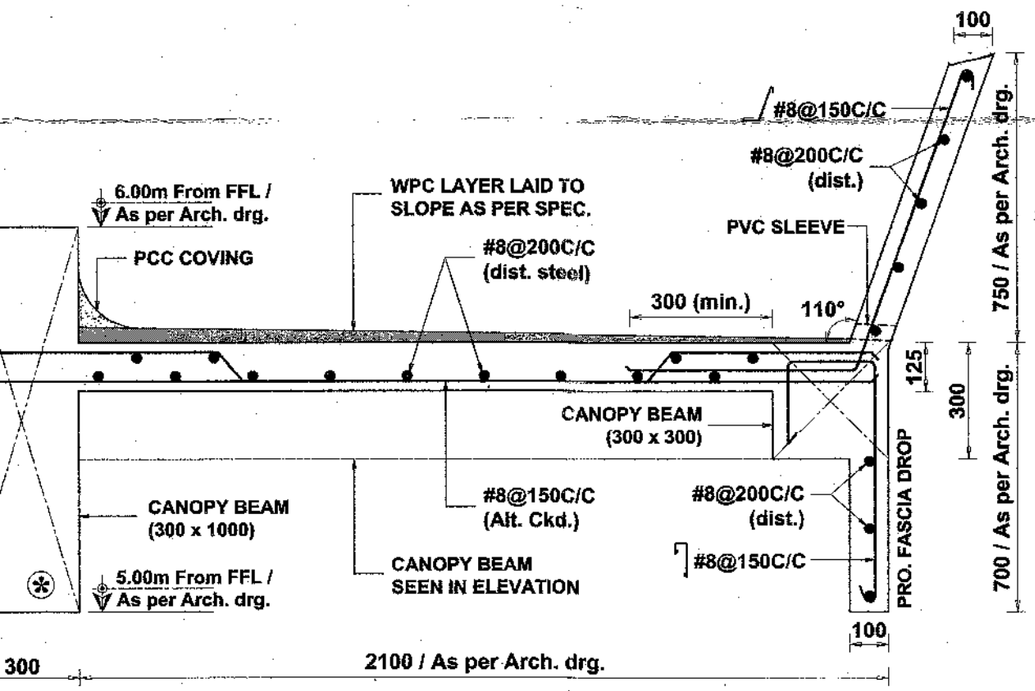


SECTION 2/2

(FOR SLIDING DOOR - SD1, LEVEL AS PER ARCH. DRG.)

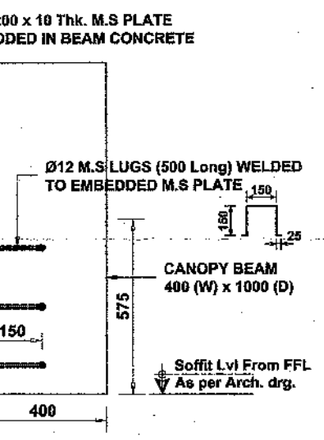

ECTION - 4/4

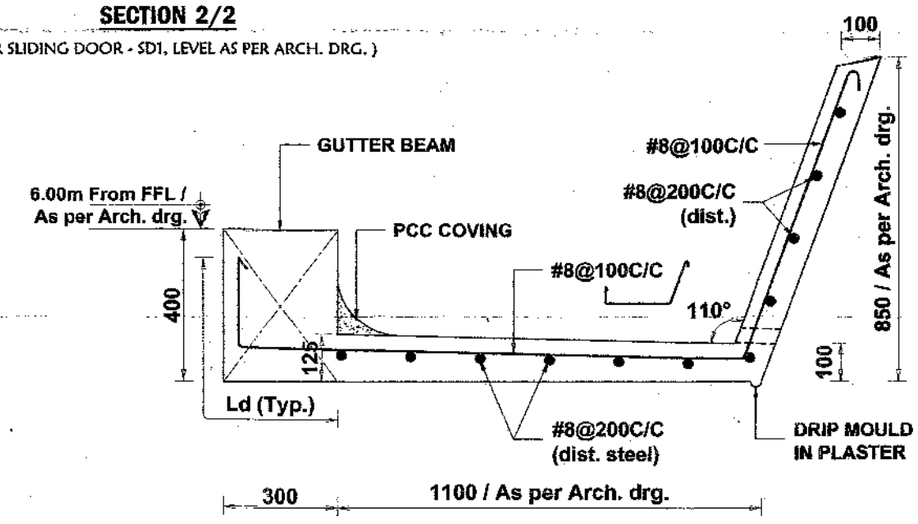

SECTION 3/3

(LOCATION AS PER ARCH. DRG.)

NOTES :

1. ALL DIMENSIONS ARE IN MILLIMETRES & LEVELS ARE IN METRES.
2. FIGURED DIMENSIONS ONLY SHALL BE FOLLOWED. DRAWING SHALL NOT BE SCALED OFF. ALL LEVELS / DIMENSIONS SHALL BE VERIFIED WITH LATEST ARCH. DRAWINGS BEFORE EXECUTION.
3. THIS DRAWING IS PREPARED BASED ON ARCHITECTURAL DRAWING NO. VSSC/CMG/PDC/1-1733/WD-01 to WD-06, Dt. 20-03-2024.
4. GRADE OF CONCRETE SHALL BE M-30 DESIGN MIX IN ACCORDANCE WITH IS : 456 - 2000 (FOURTH REVISION), UNLESS OTHERWISE SPECIFIED.
5. # DENOTES "HYSD" BAR AS PER IS : 1786 - 2008 OF GRADE Fe 500D.
6. CLEAR COVER TO MAIN REINFORCEMENT COLUMN : 50mm, BEAM : 45mm AND SLAB : 30mm.
7. ALL STRUCTURAL DRAWINGS SHALL BE READ AND CO-ORDINATE WITH RELEVANT ARCHITECTURAL DRAWINGS AND ANY DISCREPANCIES BETWEEN THEM SHALL BE IMMEDIATELY BROUGHT TO THE NOTICE OF Dy. HEAD, PDC FOR NECESSARY ACTION.
8. READ THIS DRAWING ALONG WITH DRG. NO. VSSC/CMG/PDC/STR/1-1733/ACS SHED/S-10 FOR SCHEDULE OF REINFORCEMENTS FOR GUTTER / CANOPY ROOF BEAMS.
9. REFER DRG. NO. VSSC/CMG/PDC/STR/1-1733/ACS SHED/S-07 FOR STANDARD BEAM DETAILS AND S-01 FOR ALL OTHER GENERAL NOTES.

CONSTRUCTION

SL NO.	DATE	DESCRIPTION	SH (Str.)	Dy. HEAD

REVISIONS

STRUCTURAL DRAWING

PROPOSED AMMONIUM CHLORIDE STORAGE SHED AT APEP

LAYOUT & DETAILS OF GUTTER / CANOPY ROOF BEAMS & SLABS

SCALE : NTS	DATE : 29-07-2024
DESIGNED SUGUMAR. R Sci/Engr. - SD, PDC - CMG	DRAWN
CHECKED NAVYA. P.K SH (Str.), PDC - CMG	VERIFIED & RECOMMENDED ANJU. S. DEV Dy. Head, PDC - CMG
APPROVED ALAGARSAMY. A Group Director - CMG	DRG. NO. VSSC/CMG/PDC/STR/1-1733/ACS SHED/S-09

CONSTRUCTION AND MAINTENANCE GROUP - V S S C