



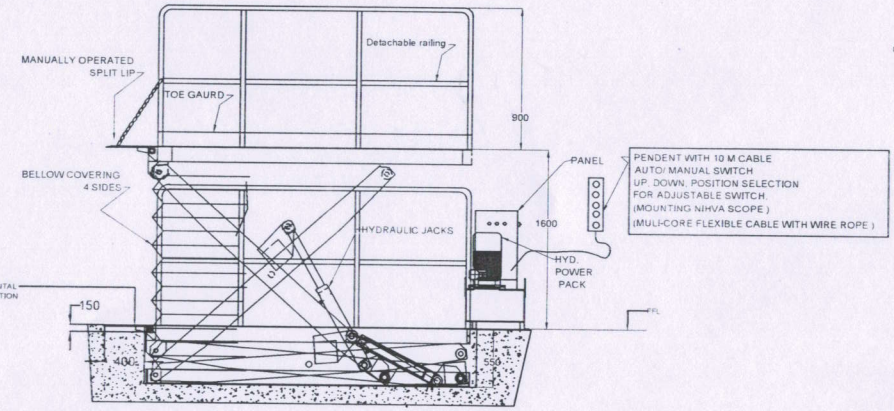

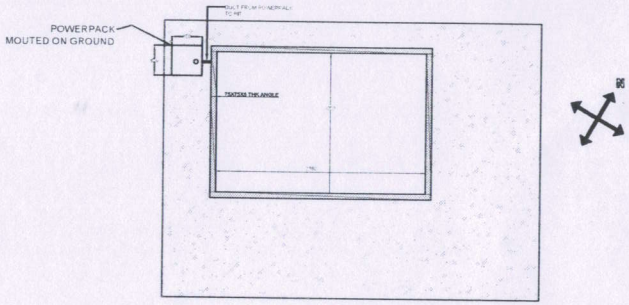

PIT DRAWING FOR REFERENCE

DETAILS-
(1) PENDANT TO BE PROVIDED ALONG MOUNTING BRACKET ON WALL .
(2) PENDANT WILL HAVE AUTO/MANUAL SWITCH , UP/ DOWN , POSITION SELECTION PUSH BUTTONS & EMERGENCY BUTTON.
(3) ONE PAIR OF PHOTOCELL TO BE PROVIDED & MOUNTING PROVISION TO BE PROVIDED .
(4) DETACHABLE RAILING FLUSH WITH FACTORY FLOOR TO BE BE PROVIDED .
(5) SCISSOR LIFT WILL BE HAVING POSITION 0 , POSITION 1 & POSITION 2 .
(6) LIMIT SWITCH WITH PROPER MOUNTING TO BE PROVIDED AT OUTSIDE BELLOW FOR POSITION 2 ALIGNMENT AS PER VEHICLE HEIGHT.

SPECIFICATIONS	
RATED CAPACITY	3 TON
PLATFORM LENGTH	3000 mm
PLATFORM WIDTH	3000 mm
OVERALL LENGTH	3150 mm
OVERALL WIDTH	3000 mm
LIP	MANUAL , ONE SIDE
LIP SIZE	350 X 2100
SAFETY BELLOW	PROVIDED
CLOSE HEIGHT	550 mm
LIFT HEIGHT	1600 mm
POWERPACK MOTOR	3 PHASE AC, 5 HP
PENDANT	1 NO
LIFT & LOWER CUT-OFF	YES
STATION ADJUSTABLE SWITCH	YES

RAL CODE PAINT (NIHVA STANDARD)	RAL 1004 GOLDEN YELLOW

NOTE-
(1) ELECTRICAL DRAWING TO BE SENT FOR REVIEW & APPROVED BEFORE MANUFACTURING OF CONTROL PANEL .
(2) ALL POINTS IN COMPLIANCE SHEET TO BE ACCEPTED & APPROVED BEFORE MANUFACTURING OF SCISSOR LIFT.

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE PIT MOUNTED HYDRAULIC SCISOR LIFT GA

	NAME	SIGN	DATE
DRAWN	SIDDHESHWAR		11.12.2020
CHECK			
APPRD.			

If any queries contact projectsupport@nihva.com

ALL DIMENSION ARE IN mm

NIHVA TECHNOLOGIES PVT. LTD.

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT -
PROJECT -
SITE LOCATION -
DWG. NO. : NIHVA/20-21/VDR/0086 REV- R00
SCALE: NTS WT: SHEET:

NIHVA TECHNOLOGIES PVT. LTD. ★ PUNE ★

Date - 11/12/2020
Approved with all points mandatory as per compliance sheet.