NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

NIHVA Sales Quotation

Grasim Industries Ltd
PO : Binaga - 581307,Karwar,
Distt : Uttar Kannada,Karnataka

Date : 21.01.2020
Quote NO : SQT.19.20.2361
Kind Attn : Mr. Ritesh Maheshwari
Email Id : ritesh.maheshwari@adityabirla.com
Contact No: 8889173900

Project Name & Location: Karnataka

Subject : Quotation for Dock Leveller and Scissor Lift.

Dear Sir,

Thank you for your opportunity and trust shown on "NIHVA" your preferred partner for innovative solutions.
This has reference to your above mentioned requirement, please find below our Solutions.

Sr. No	Description	Pages
A.	Commercial Offer	1
B.	Technical Specification	2
C.	General Conditions	3
D.	Terms & Condtions	3

A) Commercial Offer


Sr No	Description	Size		Qty	Supply Charges in INR		Installation Charges in INR	
		Clear Length (mm)	Clear Weight (mm)	(Nos)	Unit Price	Total Amount	Unit Price	Total Amount
A	**NIHVA Make Dock Leveller Capacity 10 Ton**	2130	2700	1	225,000	225,000	20,000	20,000
B	**Hydraulic Scissor Lift**	2000	800	1	350,000	350,000	20,000	20,000
				Total		**575,000**		**40,000**
C	P&F Charges			3%		**6,750**		1,200
	Total Without Taxes					**581,750**		**41,200**
	GST Extra @ 18%			18%		**104,715**		7,416
	Total With Taxes					**686,465**		**48,616**
D	Transportation Charges					**In Client Scope**		
E	Unloading Charges @ Site					**In Client Scope**		


NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

B) Technical Specification **Dock Leveller**

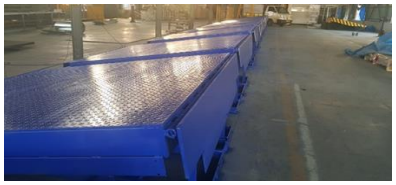



Description	Specifications
Capacity	10 Ton
Dock operation mode	AC power pack hydraulically operated
Lip operation mode	Hydraulic
Operation control	Through panel
Loading platform height from road	1250mm
Travel above & below dock level	(+) 300 / (-) 250 mm
Platform Size (W x L)	2700 mm x 2130 mm
Lip size (W x L)	2700 x 400 mm
Shut Height	480 mm
Overall length	2700mm x 2130mm + Lip Length (400mm)
Maximum slope can be achieved	10%
Clear Pit dimensions (W x L x D)	(W) 2750mm x (L) 2180 mm x (D)485 mm
Hydraulic power pack	Standard
Driver type	Direct by electric Motor
Motor Ratings	1 H.P
Pump design flow	2.5 LPM
Pump pressure	120 bar Operating 200 bar Max.
Safety valve set pressure	120 Kg/cm²
Pump Type	Gear
Volume of oil receiver	7 Lit
No Of Deck cylinder	2 No
Lip Cylinder	1 No
Dock Bumper	Pair of Dock Bumper

Technical Specification **Scissor Lift**

Description	Specifications
Capacity	2 Ton
Platform Size	2000 L x 800 W
Shut ht	450mm
Max ht	2150mm
Lift ht	1200
Power Pack	3HP, 3 Phase
Saftey railing	Both length side only
Colour	As required
Rail wheel	Dia 100 mm

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

C) General Conditions

1 Installation will start after receiving of Site Readyness Photographs or written Email communication.

2 We will mobilize the Installation Team in 3 - 4 working days, after reciept of Site Readyness Confirmation

3 For any reason if we need to stop our Installation and demobilize the Team without completing the Work, then extra cost will be applicable for Remobilizing the Team.

4 If Lifting Equipements are in NIHVA Scope, then those will be used for Installation purpose only and not for any other works.

Note: Please find below List which are in Client Scope

Sr. No	Description	Remark
1	Secured and fully covered Store area to keep the material	In Client Scope
2	Scaffolding/Hydra/Crane/Forklift etc - Required for Installation at Site	In Client Scope
3	Electrical Supply on the site single phase/three phase points at different places.	In Client Scope
4	Any civil / masonry/structural work required	In Client Scope
5	All structure support required	In Client Scope
6	In Case of any changes in the layout as per site requirements after the shipment of material , the additional quantities and the wastage.	In Client Scope
7	Conduits, Cables required	In Client Scope

D) Terms & Conditions

Price Ex Works Pune

Delivery : 5 - 6 weeks from the date of receipt of confirmed purchase order, Advance Payment & Drawing approval.

Payment : 80% Advance along with Confirmed Purchase Order & Balance before dispatch.

Validity : Validity of Offer is 15 days from the date of quotation

Warranty : 12 months from the date of supply.

For any further Clarification /Information in this Concern, Please feel free to Contact **Mr. Sunny on 8551035333.**

With Best Regards
Ulka Auti
7219206333
For NIHVA Technologies Pvt Ltd