

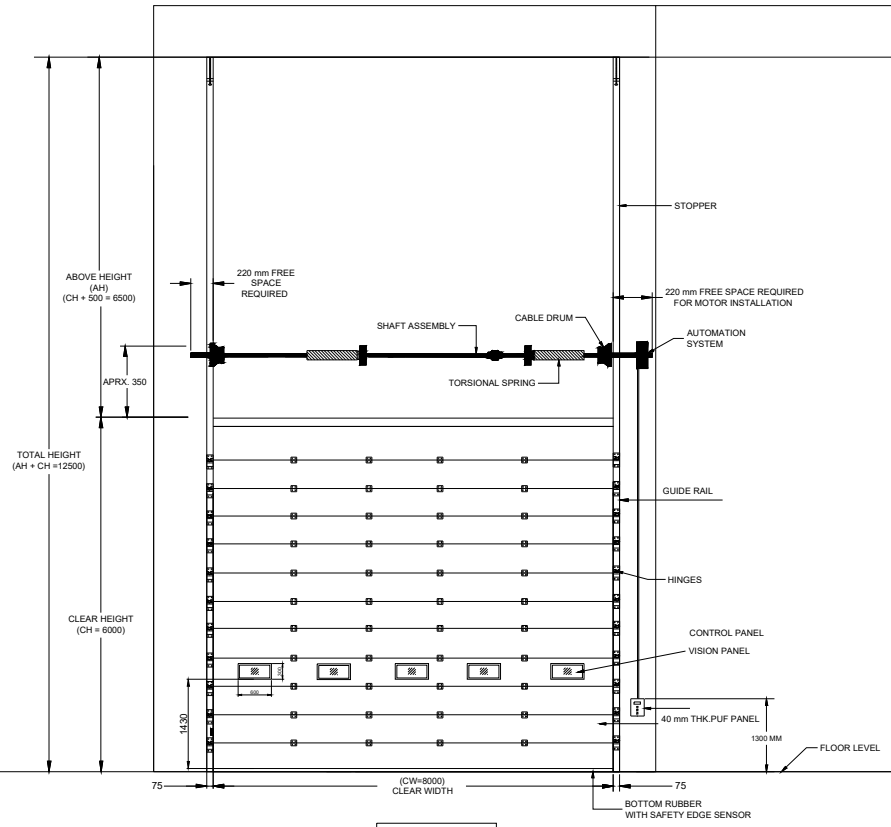


INSIDE ELEVATION

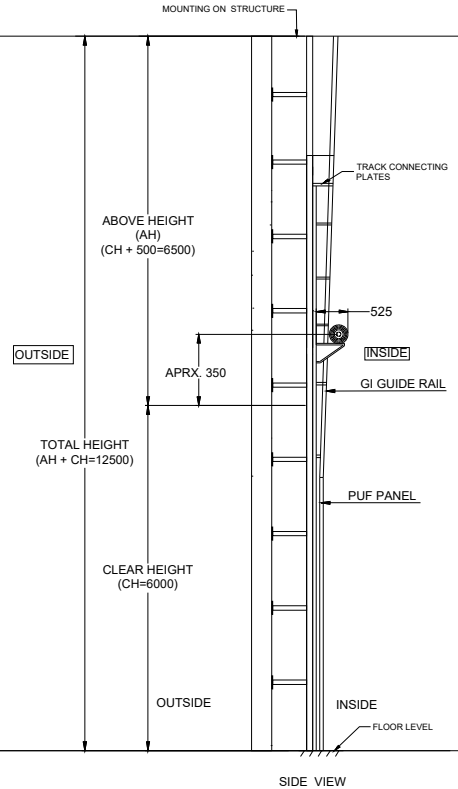


SIDE VIEW

MOUNTING ON STRUCTURE

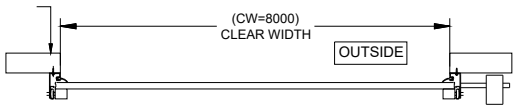

PLAN

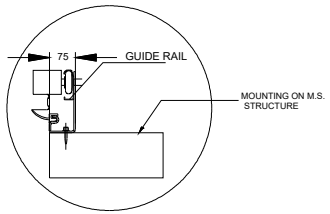

TRACK DETAILS

NOTE:-

1.All dimension are in MM

2.Required all civil work will be Client scope

3.Required structure will be client scope

LOCATION - CPL- 01

DIMENSION :

CLEAR WIDTH (CW)	CLEAR HEIGHT (CH)	QUANTITY
8000 mm	6000 mm	01 NOS

TECHNICAL DATA :

COMPONENTS	MATERIALS	SPECIFICATIONS
DOOR PANELS	GI & PUF	40 mm CFC- FREE POLYURETHANE WITH 0.4 mm THK, GI PRECOATED PANELS.
DOOR HINGE	———	HEAVY DUTY HINGES FOR INTERLOCKING OF PANELS
SHAFT ASSEMBLY	STD.	TORSIONAL SPRING WITH SHAFT & BEARING PLATES
MATERIAL FINISH		1.OUT SIDE- BRICK RED (RAL 3016). 2. IN SIDE- WHITE (RAL 9010).

ACCESSORIES-

1. SAFETY EDGE SENSOR.
2. SPRING BREAK DEVICE(SPRING FAILURE PROTECTION)
3. 05 WINDOWS.
4. ANY POINT STOP(DEADMAN CONTROL)
5. SAFETY PHOTOCELL
6. TRAFFIC LIGHT

IMPORTANT NOTES:

1.SINGLE PHASE POWER SUPPLY REQUIRED AT DOOR LOCATION.
2.ALL CIVIL WORK SHALL BE CLIENT'S SCOPE.
3.REQUIRED STRUCTURE FOR DOOR IS IN CLIENT'S SCOPE.

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Email:- info@nihva.com
Website:- www.nihva.com

TITLE:

VERTICAL SECTIONAL DOOR - VL

CLIENT'S APPROVAL :

CLIENT -

PROJECT -

SITE LOCATION -

DWG. NO. : NIHVA/24-25/xx00

SCALE: NTS	WT:	SHEET:1 OF 1	REV- 0

	NAME	DATE	SIGN
DRAWN	B.S.	11-11-2025	
CHECK	V.T.	11-11-2025	
APPROVAL	V.T.	11-11-2025	

If any queries contact : design1@nihva.com

NOTE: ALL DIMENSIONS ARE IN mm

THIS DRAWING & DESIGNING IS THE PROPERTY OF NIHVA TECHNOLOGIES. NOT TO BE SOLD OR COPIED TO ANY OTHER CONCERN.