


| DOCK LEVELER SIZE | WIDTH (W) | LENGTH ( L) | HEIGHT (H) | LIP (C) LENGTH | BUFFER SIZE (OPTIONAL) |
|---|---|---|---|---|---|
| | 2250 | 2500 | 480 | 400 | 200X300X100 |


| PIT DIMENSION | WIDTH (W 1) | LENGTH ( L 1) | DEPTH (D) | ALL DIMENSIONS ARE IN mm |
|---|---|---|---|---|
| | 2300 | 2570 | 485 | |

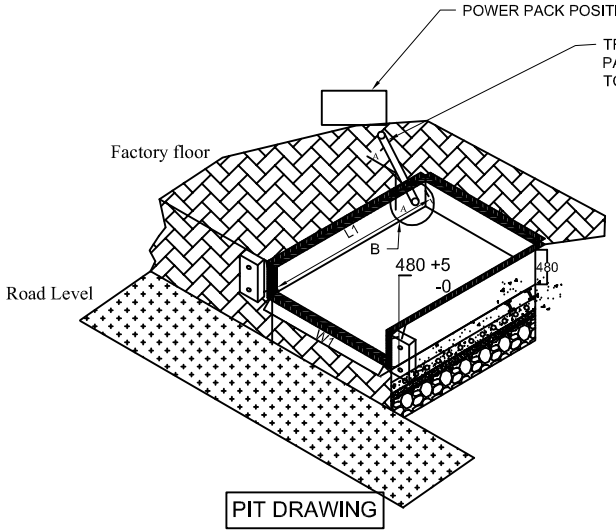


PIT DRAWING




NOTE: -

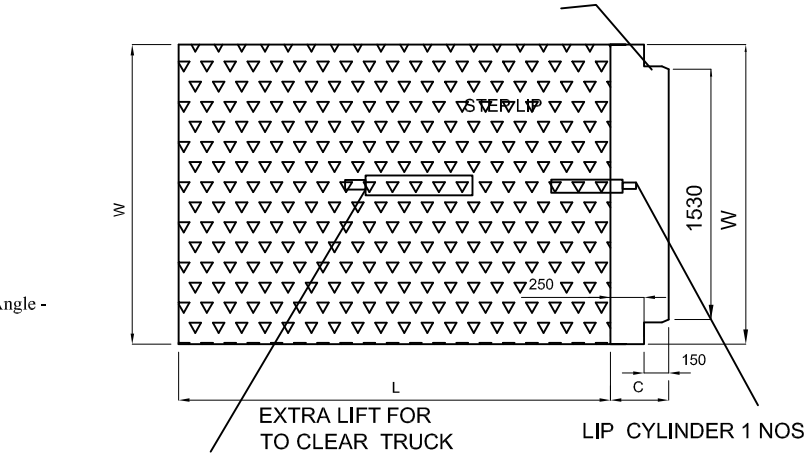1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION ( SUPPLY CABLE LENGTH STD. 7000 MM )
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 12000 KGB FLOOR LOADING
4. MOUNTING ARRANGEMENT FOR BUFFERS SHOULD BE MADE AS PER BUFFER DRAWING ( IF ORDERED )
5. FABRICATION TOLERANCE FOR PLATFROM SIZE WILL BE ±15 MM
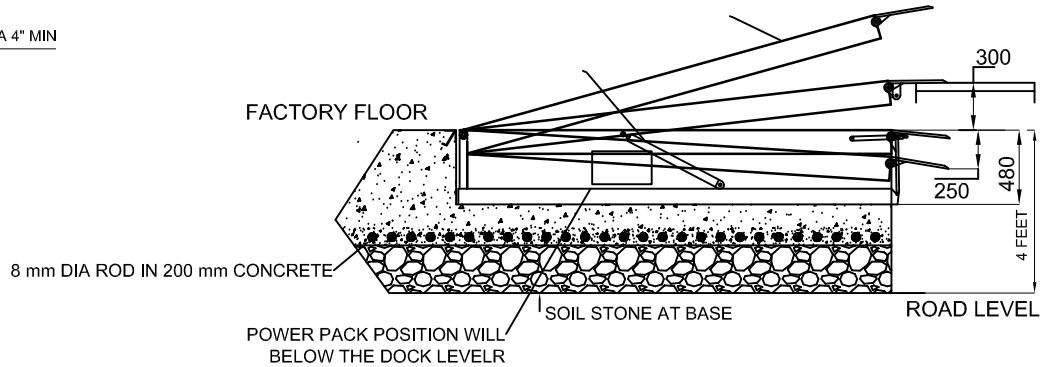
# DOCK LEVELER- 9 TON CAPACITY - DOUBLE CYLINDER

| | | |
|---|---|---|
| CLIENT APPORVAL- | | NIHVA TECHNOLOGIES PVT. LTD. — NIHVA TECHNOLOGY PVT. LTD. PUNE Tel : 020 66304033 Email:- info@nihva.com Website:- www.nihva.com |
| DRAWN :- A. KUMAR | DATE : - 30/09/2014 | CLIENT - REWARD CONSTRUCTION |
| CHECK:- R. KULKARNI | DATE : - 30/09/2014 | PROJECT - IR |
| ALL DIMENSION ARE IN mm | | SITE - NERUL AHEMDABAD |
| If any queries contact : projects@nihva.com | | DWG. NO. - NVA/REWARD/NDL/0914. |