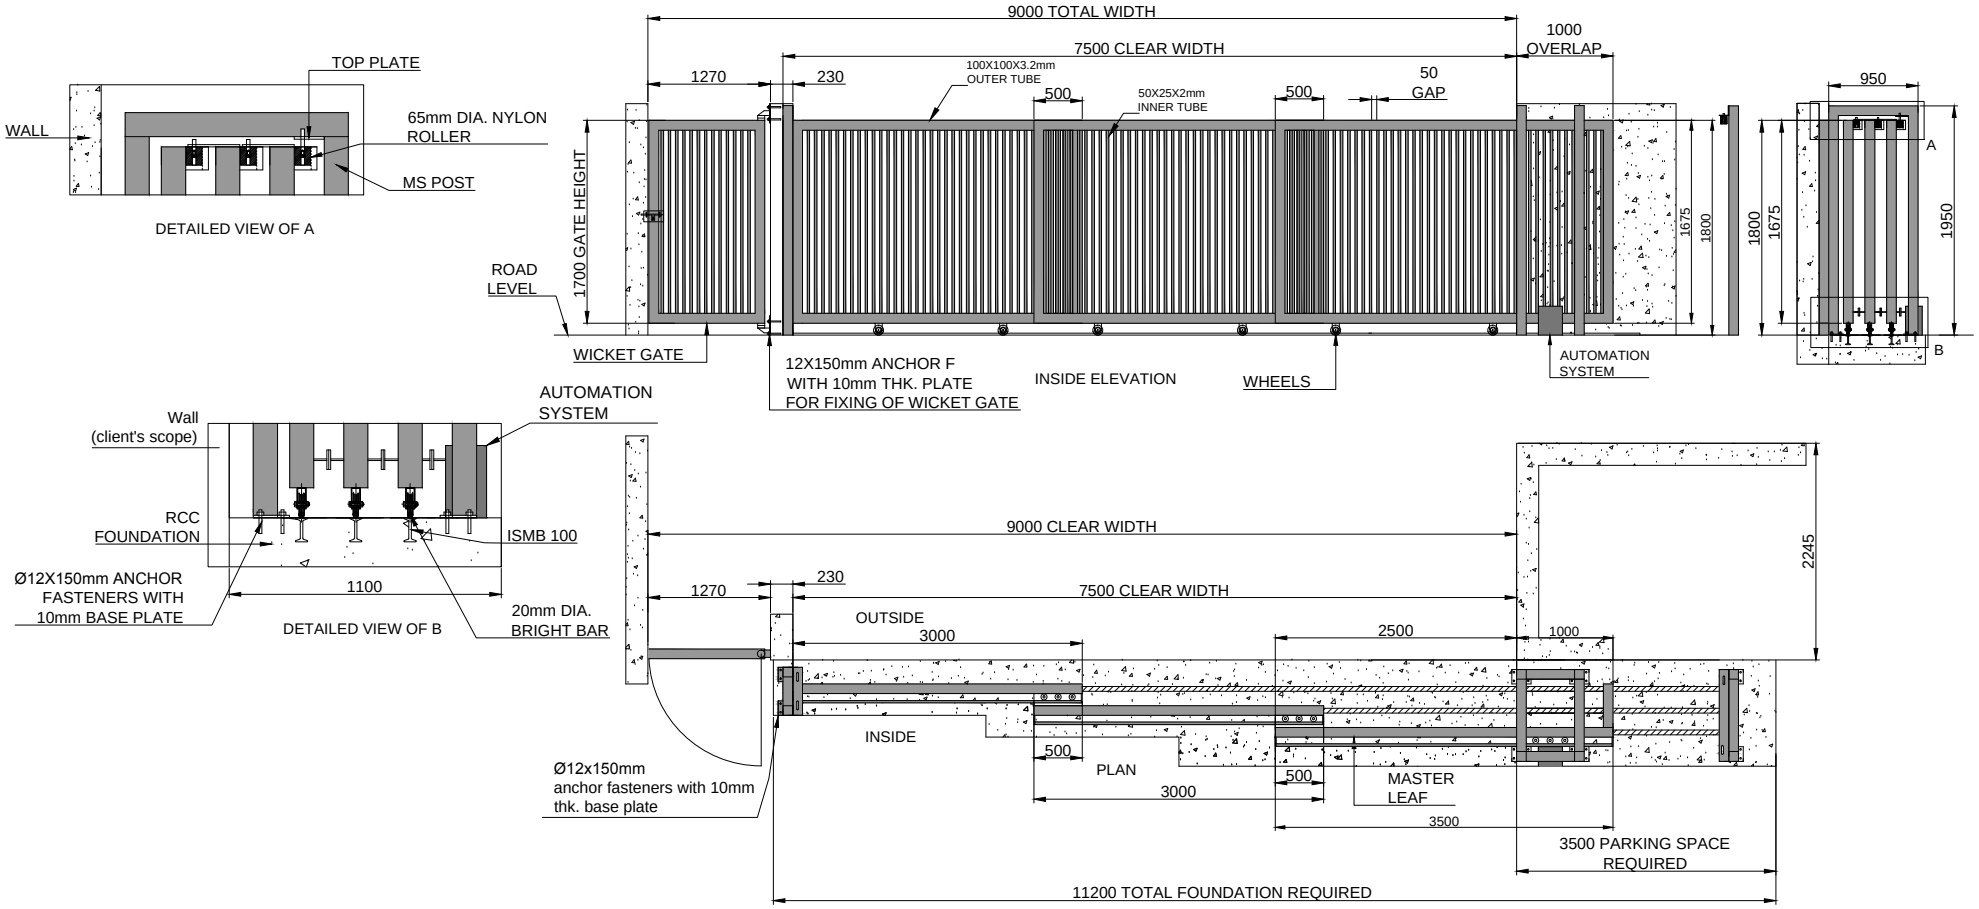


REV 1- a.FIXING DETAILS ARE SHOWN AS PER REQUIREMENT.
b. FOUNDATION WIDTH REVISED FROM 1000 TO 1100mm.
REV 2- GATE HEIGHT REVISED FROM 2100 TO 1800mm.
REV 3- GATE HEIGHT REVISED FROM 1800 TO 1675mm.
REV 4- GATE CLEAR WIDTH REVISED FROM 6000 TO 7500mm. ALSO FIXED GRILL ELIMINATED.

NOTE-
1. ALL REQUIRED CIVIL WORK WILL BE IN CLIENTS SCOPE.
2. ONE COAT OF RED OXIDE & TWO COAT OF APPROVED RAL SHADE WILL BE GIVEN TO THE GATE.
3.IF NECESSARY GATE LEAF WILL BE IN TWO PARTS FOR TRANSPORTATION & WILL BE WELD TOGETHER ON SITE.

SR NO	TUBE SPECIFICATION	
1	MS 100X100X3.2mm	OUTER TUBE
2	MS 50X25X2mm	INNER TUBE

GATE WIDTH	GATE HEIGHT	QUANTITY	LOCATION
7500mm	1800mm	1 NOS	SECURITY CABIN 1
1270mm	1800mm	1 NOS	SECURITY CABIN 1

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE
AUTOMATIC THREE LEAF TELESCOPIC GATE & WICKET GATE 2

	NAME	DATE
DRAWN	OMKAR	08/11/17
CHECK	SHEKHAR	08/11/17
REV.		
APPROVAL	SHEKHAR	08/11/17

If any queries contact : projects@nihva.com

ALL DIMENSION ARE IN mm

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT - LUPIN LIMITED
PROJECT -
SITE LOCATION - MIHAN, NAGPUR
DWG. NO. : NIHVA/17-18/0236/R04 | REV - 4
SCALE: NTS | WT: | SHEET: 01 OF 01