NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk,
MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

NIHVA Sales Quotation

Suroj Buildcon
Bungalow No. 3, Liberty Society Phase-I, North Main Road,
Koregaon Park, Pune 411 001

Date : 12.12.2020
Quote NO : SQT.20.21.2880
Kind Attn : Ms. Reema Asar
Email Id : rasar@suroj.in
Contact No: 9810267360

Project, Location : DRAL, Nagpur

Subject : Quotation for Sectional Doors

Dear Sir,

Thank you for your opportunity and trust shown on "NIHVA" your preferred partner for innovative solutions.
This has reference to your above mentioned requirement, please find below our Solutions.

Sr. No	Description	Pages
A.	Commercial Offer	1
B.	Technical Specification	2
C.	General Conditions	3
D.	Terms & Condtions	3

A) Commercial Offer

Sr No	Description	Size		Qty	Supply Charges in INR		Installation Charges in INR	
		Clear Width (mm)	Clear Height (mm)	(Nos)	Unit Price	Total Amount	Unit Price	Total Amount
1	**Sectional Doors with Standard Lift**	4000	4000	2	335,000	670,000	20,000	40,000
2	**Sectional Doors with Standard Lift**	5000	6000	2	492,000	984,000	20,000	40,000
	Total			**4**		**1,654,000**		**80,000**
3	P&F Charges			3%		49,620		
	Total Without Taxes					1,703,620		80,000
	GST Extra @ 18%			18%		306,651.60		14,400
	Total With Taxes					**2,010,272**		**94,400**
4	Transportation Charges					Extra at atcual		
5	Unloading Charges @ Site					In Client Scope		

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk,
MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company


GST Pune : 27AAECN0437H1ZM

B) Technical Specification

Sectional Door with Standard Lift





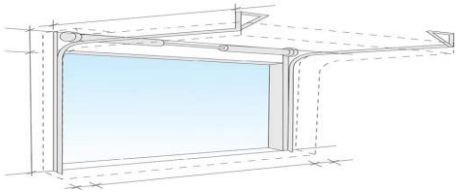

Sr. No	Description	Specification
1	Model No	ASSA ABLOY OH1042P
2	Opening Direction & Mounting	Standard
3	Opening/Closing Speed	CDM9 0,28 m/s
4	Door Material	Steel
5	Panel Thickness	42 mm Square Grid, steel sheet
6	Filling	CFC-free polyurethane
7	Door sealent	All door sealants made of EPDM rubber, temperature resistant - 30/+70
8	Water Penetration	EN 12425 class 3
9	Air Permealibity	EN12426 class 3
10	Thermal Transittance	EN 12428 1.10W /m2K
11	Bottom sealing	Bottom of the door to be equiped with three lip sealing made of oil resistant EPDM rubber
12	Door saftey	Doors equiped with spring break device
13	Incase of Power failuer	Doors to be equiped with quick release fuction
14	Operator power conumption	Operator to have a maximum power consumption of 0,37kW and a standby consumption of Maximum 15W
15	Drive Unit & Mounting Type	Single phase 230V direct drive on shaft
16	Emergency Operation	by Disengagement rope manual
17	Operating Switch	Up/Down Keypad + stopbutton
18	Locks : Lock bolt	The Lock bolt locks the door from the inside, without the use of a key. The Lock bolt is not visible from the outside.
19	Environmental Green Product Declaration Certification	As per ISO 14025 and EN 15804

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk,
MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

C) General Conditions

1 Installation will start after receiving of Site Readyness Photographs or written Email communication.

2 We will mobilize the Installation Team in 3 - 4 working days, after reciept of Site Readyness Confirmation

3 For any reason if we need to stop our Installation and demobilize the Team without completing the Work, then extra cost will be applicable for Remobilizing the Team.

4 If Lifting Equipements are in NIHVA Scope, then those will be used for Installation purpose only and not for any other works.

Note: Please find below List which are in Client Scope

Sr. No	Description
1	Secured and fully covered Store area to keep the material
2	Scaffolding/Hydra/Crane/Forklift Etc - Required for Installation at Site
3	Electrical Supply on the site single phase/three phase points at different places.
4	Any civil / masonry/structural work required
5	All structure support required
6	In Case of any changes in the layout as per site requirements after the shipment of material , the additional quantities and the wastage.
7	Conduits, Cables required

D) Terms & Conditions

Price : Ex Works Pune

Delivery : 13 - 14 weeks from the date of receipt of confirmed purchase order, Advance Payment & Drawing approval.

Payment : 80% Advance along with Confirmed Purchase Order & Balance before dispatch.

Validity : Validity of Offer is 15 days from the date of quotation

Warranty : 12 months from the date of supply.

Please feel free to Contact **Mr. Shrikant Mirkute on 8551098333** For any further Clarification /Information in this Concern.

With Best Regards
Shailesh Bhoir
8551091333
For NIHVA Technologies Pvt Ltd