SOLAR PRODJECT LTD
Sofia, Iliensko Shosse 8
tel.: 02/93 600 93 fax: 02/ 936 08 97 e-mail: laboratory@solarproject.bg


NOTIFIED TESTING LABORATORY
Permit № **CPD 20** of MRRB
Identification № NB **2145** in the Register of EC

PROTOCOL
OF INITIAL TYPE TEST

№ ITT- 006 / 12.06.2013

The testing was performed in compliance with the requirements of Part Two of **Regulation for the essential requirements towards construction projects and assessment for conformity of the construction products** (RERCPACCP), initiated by **Construction Projects Directice** (CPD) 89/106/EEC of the European Community.

Designation of the product:



PoliPanel ®Hermetic Sliding Door with BESAM H Operator
Size: 1362 mm x 2050 mm
Aluminum Seal Socket
Aluminium U Profile
Wooden Support Plates (3 mm)
Stainless Steel Front Plate and Back Plate (1 mm)
Inner Rockwool isolator
Inner Aluminum Connector Profile
Aluminum Ground Profile

Producer: PoliPanel®,Politeks A.Ş
DOSB 4. Kisim Sakarya C.№ 50 41400 Gebze/Kocaeli

Client: PoliPanel®,Politeks A.Ş
DOSB 4. Kisim Sakarya C.№ 50 41400 Gebze/Kocaeli

Assigning document: Contract № 01 / 01.02.2013

System of assessment for conformity: System "3" as in Annex ZA of EN 13241-1

Essential requirements:
- **3 – Dangerous substance and water penetration**
- **4 – Safe operation (resistance to win load)**
- **5 – Noise protection**
- **6 – Power and heat saving (power efficiency) air permiability**

Test sample: Request: from 30.01.2013

Period for conducting the testing: 03.06.2013-12.06.2013

ЛАБОРАТОРИЯ ЗА ИЗПИТВАНЕ SOLAR PROJECT TEST LABORATORY

Head of test: (D.Georgiev)

Head of laboratory: (Dilp.eng. P.Naydenova)

3. Dangerous substance and water penetration

Results from the testing:

№ in order	Indicator	Measure unit	Testing method	Test results	Requirements as in technical specification
1	2	3	4	5	6
1.	Watertightness		EN 12489	Class 0	EN 13241-1

4. Safe operation (resistance to win load)

Results from testing:

№ in order	Indicator	Measure unit	Testing method	Test results	Requirements as in technical specification
1	2	3	4	5	6
1.	Resistant to wind load and relative frontal deflection		EN 12424 EN 12444	Class 4	EN 13241-1

5. Sound insulation

Results from testing:

№ in order	Indicator	Measure unit	Testing method	Test results	Requirements as in technical specification
1	2	3	4	5	6
1.	Measurement of sound insulation	dB	EN ISO 10140-2	48	EN 13241-1

6. Power and heat saving (power efficiency)) air permiability

Results from testing:

№ in order	Indicator	Measure unit	Testing method	Test results	Requirements as in technical specification
1	2	3	4	5	6
1.	Air permeability		EN 12427	Class 5	EN 13241-1
2.	Determination of thermal transmittance	W/m^2K	EN 12428	0.66	EN 13241-1

Technical documentation used: (list of technical specifications with requirements and methods for testing, rules and regulations etc. documents related to initial type testing)

EN 12424, EN 12444, EN ISO 10140-2, EN ISO12428, EN 12427, EN 13241-1

Head of test: (D.Georgiev)

Head of laboratory: (Dilp.eng. P.Naydenova)

ЛАБОРАТОРИЯ ЗА ИЗПИТВАНЕ SOLAR PROJECT TEST LABORATORY

8 Iliensko shose str., 1220 Sofia tel.: +3592/8109 127 +3592/8109 155 fax: +3592/8109 1
e-mail: laboratory@solarproject.

ANNEX № 1

To Protocol № ITT – 006 / 12.06.2013

Of the garage door test, accepted for testing in "Notified Testing Laboratory – Solar Project LTD"

EN 13241-1. Industrial, commercial and garage doors.

Report test resistance to penetration of water under EN 12489:2000 - Calculation method. Classification according to EN 12425

Date: 06.06.2013.

Notified Testing Laboratory "Solar Project Ltd"

Test room and air conditions

Temperature	22.1°C	Relative humidity	43.3 %
Atmospheric air pressure	101 hPa	Water temperature	18°C

Identification test:
Overall dimensions of the door: height 2115 mm
width 1362 mm

Reference drawings of the test specimen
.....

Test stand „K.Schulten"GmbH & Co.KG

SPRAY CONDITIONS:

Number of nozzles	1 l/nozzle	2 l/nozzle
Up line		3 nozzles
Additional line1		
Additional line 2		
Additional line 3		
Additional line 4		

OBSERVATIONS ON THE DEGREE OF WATER PERMEABILITY ON THE INTERNAL SIDE OF SAMPLE

Air pressure, Pa	Time, min	Frame	Junction	Glass	Filling	Opening	Other (angles)
0	10		✓				
10	+5 (15)						
30	+5 (20)						
50	+5 (25)						

1) Degree of water permeability

0: No leak
1:1 Fitting drop
2:2 Or more fitting or drobs
3: Ttrickling
4: Significant flow

Place of water permeability

Between sash and frame

ЛАБОРАТОРИЯ ЗА ИЗПИТВАНЕ
SOLAR PROJECT
TEST LABORATORY

ANNEX № 2

To Protocol № ITT - 006 / 12.06.2013 for window testing, taken for tests in Laboratory for testing profiles " Solar Project" LTD

EN ISO 12428 .Thermal performance of windows and doors . Determination of thermal transmittance by hot box

Application: PoliPanel®, Politeks A.Ş

Model for test: PoliPanel® Hermetic Sliding Door with BESAM H Operator

1362 mm x 2050 mm
Aluminum Seal Socket
Aluminium U Profile
Wooden Support Plates (3 mm)
Stainless Steel Front Plate and Back Plate (1 mm)
Inner Rockwool isolator
Inner Aluminum Connector Profile
Aluminum Ground Profile

Results:

- Air temperature in hot chamber: Th = **23,6** ^{0}C
- Air temperature in cold chamber: Tc = **1,1** ^{0}C
- Environment temperature: To = **21,7** ^{0}C
- Thermal stream: F = **27** W
- Density of the thermal stream: f = **15** W/ m^2
- Coefficient of thermal transmission: k = **0,66** W/ m^{2}K
- Total thermal resistance: R = **1,55** m^{2}K/ W
- Indefiniteness: ± **0,03**

ЛАБОРАТОРИЯ ЗА ИЗПИТВАНЕ SOLAR PROJECT TEST LABORATORY


8 Iliensko shose str., 1220 Sofia tel.: +3592/8109 127 +3592/8109 155 fax: +3592/8109
e-mail: laboratory@solarproje

ANNEX № 3

Manufacturer: **PoliPanel® ,Politeks A.Ş**

Client: **PoliPanel®, Politeks A.Ş**
Element test: **PoliPanel® Hermetic Sliding Door with BESAM H Operator**
Description of equipment for testing components, and procedures for testing. Refer to the applicable ISO 10140-2 stadart 1, which includes:
Area "S" of the test element: **2.792 m^2**
Weight of specimen: **kg/m^2**
Ambient temperature in the room: **20.9 °C**
Relative humidity in the room: **51.5 % RH**
Volume of the receiving room: **50 m^3**
Identification of the test room: **Laboratory**

Frequency f Hz	L_n one-third octave dB
0	-
63	-
80	-
100	42.4
125	41.4
160	43.1
200	41.4
250	46.2
315	44.7
400	44.7
500	41.5
630	50.1
800	54.4
1000	48.2
1250	46.5
1600	49.3
2000	44.6
2500	50.3
3150	49.1
4000	51.8
5000	54.9

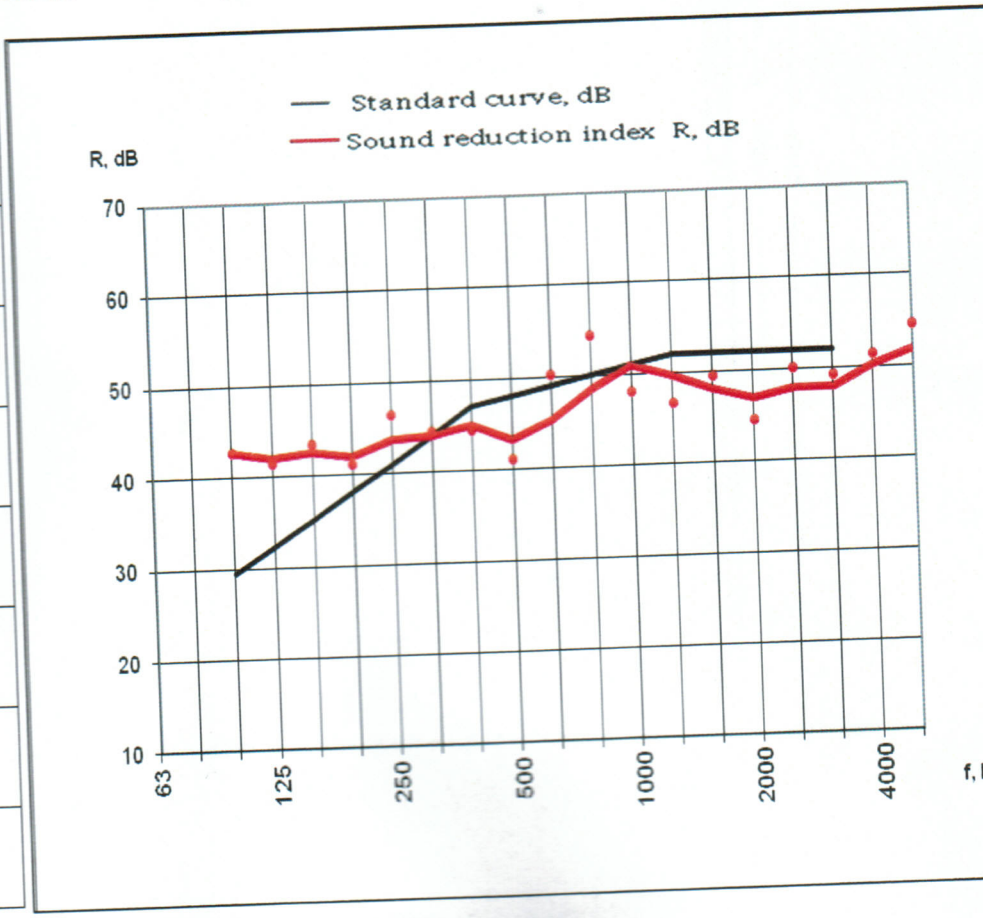

Legend: R-index, volume down, dB
f-frequency, Hz

Classification in accordance with ISO 717-1:
Rw (C;Ctr) = 48 (-1; -2) dB $C_{50\text{-}3150}$ = (-1,0) dB; $C_{50\text{-}5000}$ = (0,0) dB; $C_{100\text{-}5000}$ = (0,0) dB


Evaluation based on results from laboratory measurements obtained engineering method:
$Ctr_{50\text{-}3150}$ = (-2,0) dB; $Ctr_{50\text{-}5000}$ = (-2,0) dB; $C_{100\text{-}5000}$ = (-2,0) dB


№ (Test protocol): **№ ITT – 006 / 12.06.2013**
Notification body: **Lab test "Solar Project" Ltd.**


Date of testing: **07.06.2013**

Test conducted: (Signature).....

ЛАБОРАТОРИЯ ЗА ИЗПИТВАНЕ
SP
SOLAR PROJECT
TEST LABORATORY

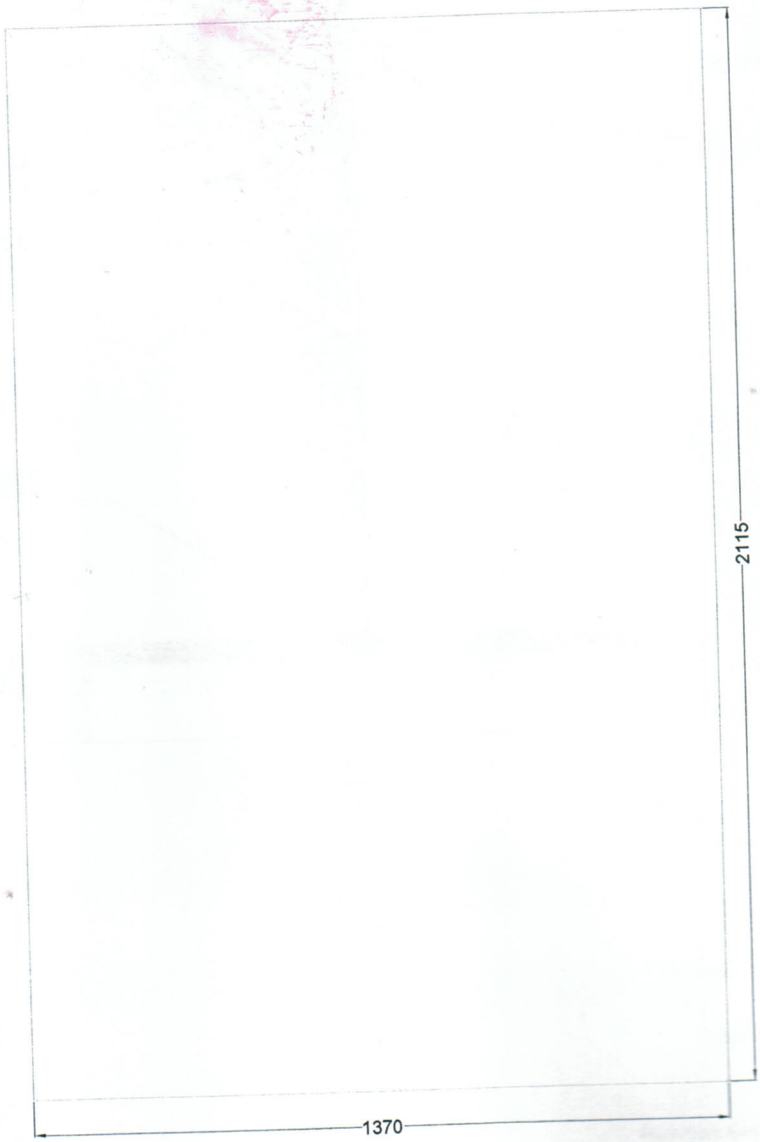







304 Stainless Steel Surface (1 mm)
Inner Rockwool Isolator


- HRC49 Series Bended Doors
- Wing Dimensions
  - •1370x2115x49 mm
- Inner Frame Dimensions
  - •1362x2050 mm

ЛАБОРАТОРИЯ ЗА ИЗПИТВАНЕ
SP
SOLAR PROJECT
TEST LABORATORY

PoliPanel Hermetic Doors		Politeks A.S.
Date:	06.06.2013	POLI:PANEL
Drawn By:	Checked By	Approval
Ramis E.	Ramis E.	Ufuk A.

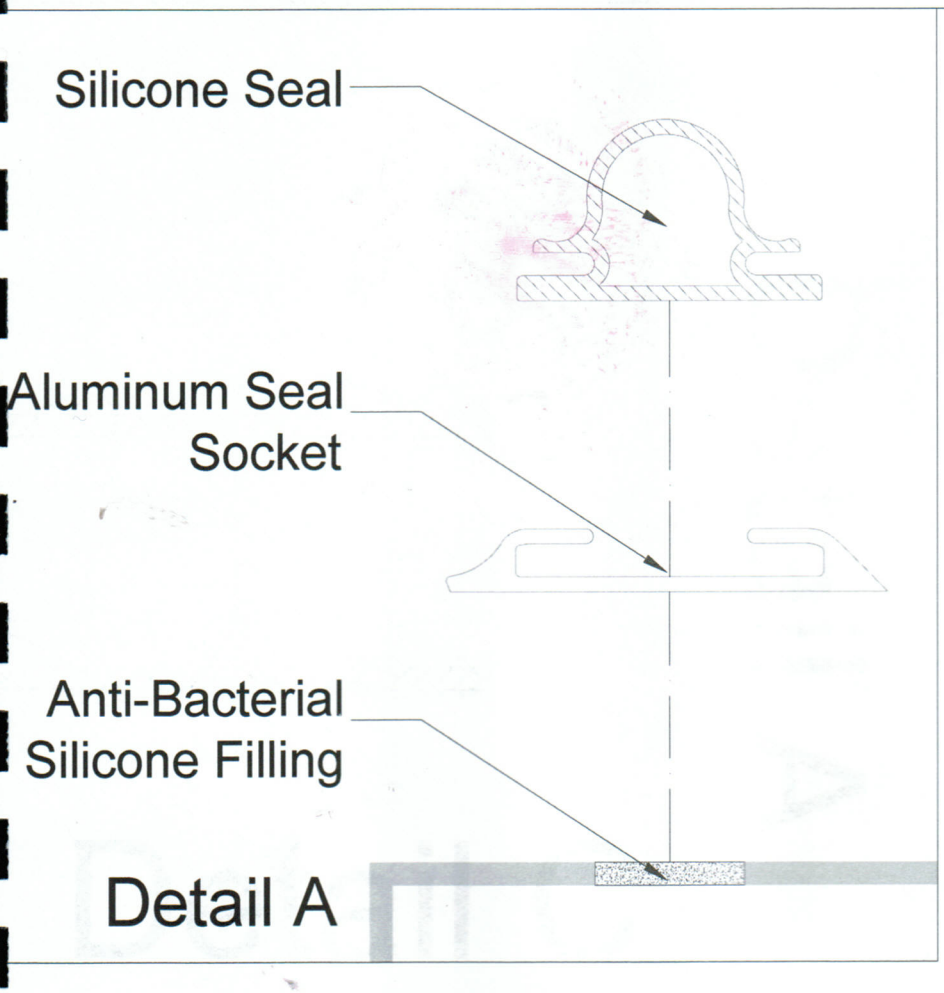

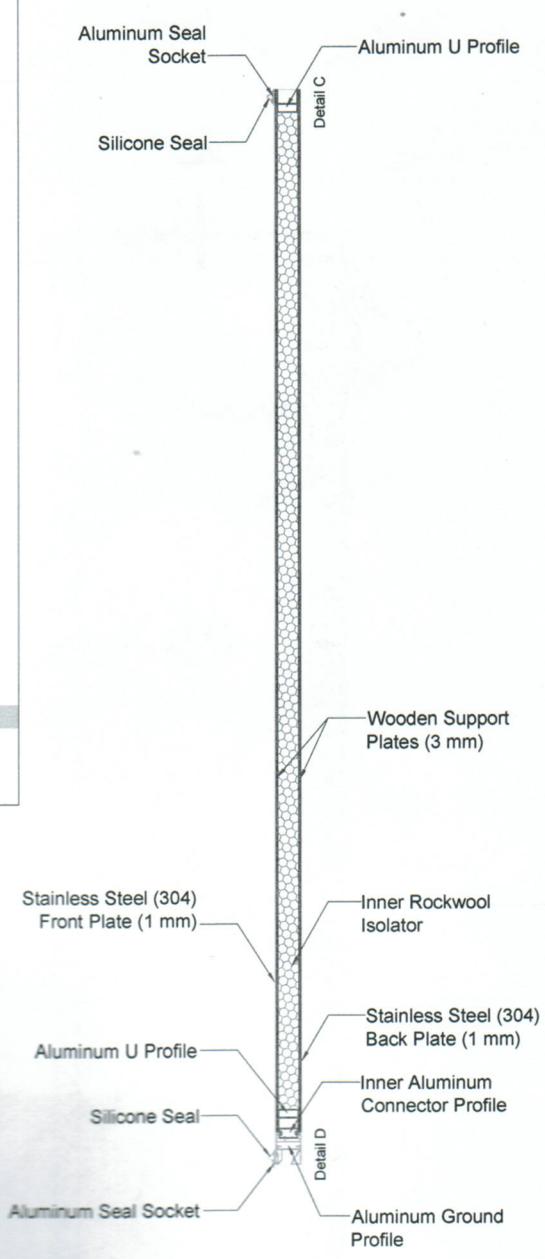

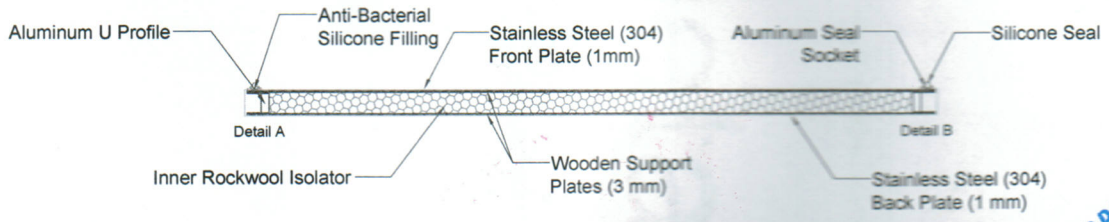

ЛАБОРАТОРИЯ ЗА ИЗПИТВАНЕ
SP
SOLAR PROJECT
TEST LABORATORY

PoliPanel Hermetic Doors		Politeks A.S.
Date:	06.06.2013	POLIPANEL
Drawn By:	Checked By	Approval
Ramis E.	Ramis E.	Ufuk A.

SOLAR PROJECT
TEST LABORATORY
ЛАБОРАТОРИЯ ЗА ИЗПИТВАНЕ