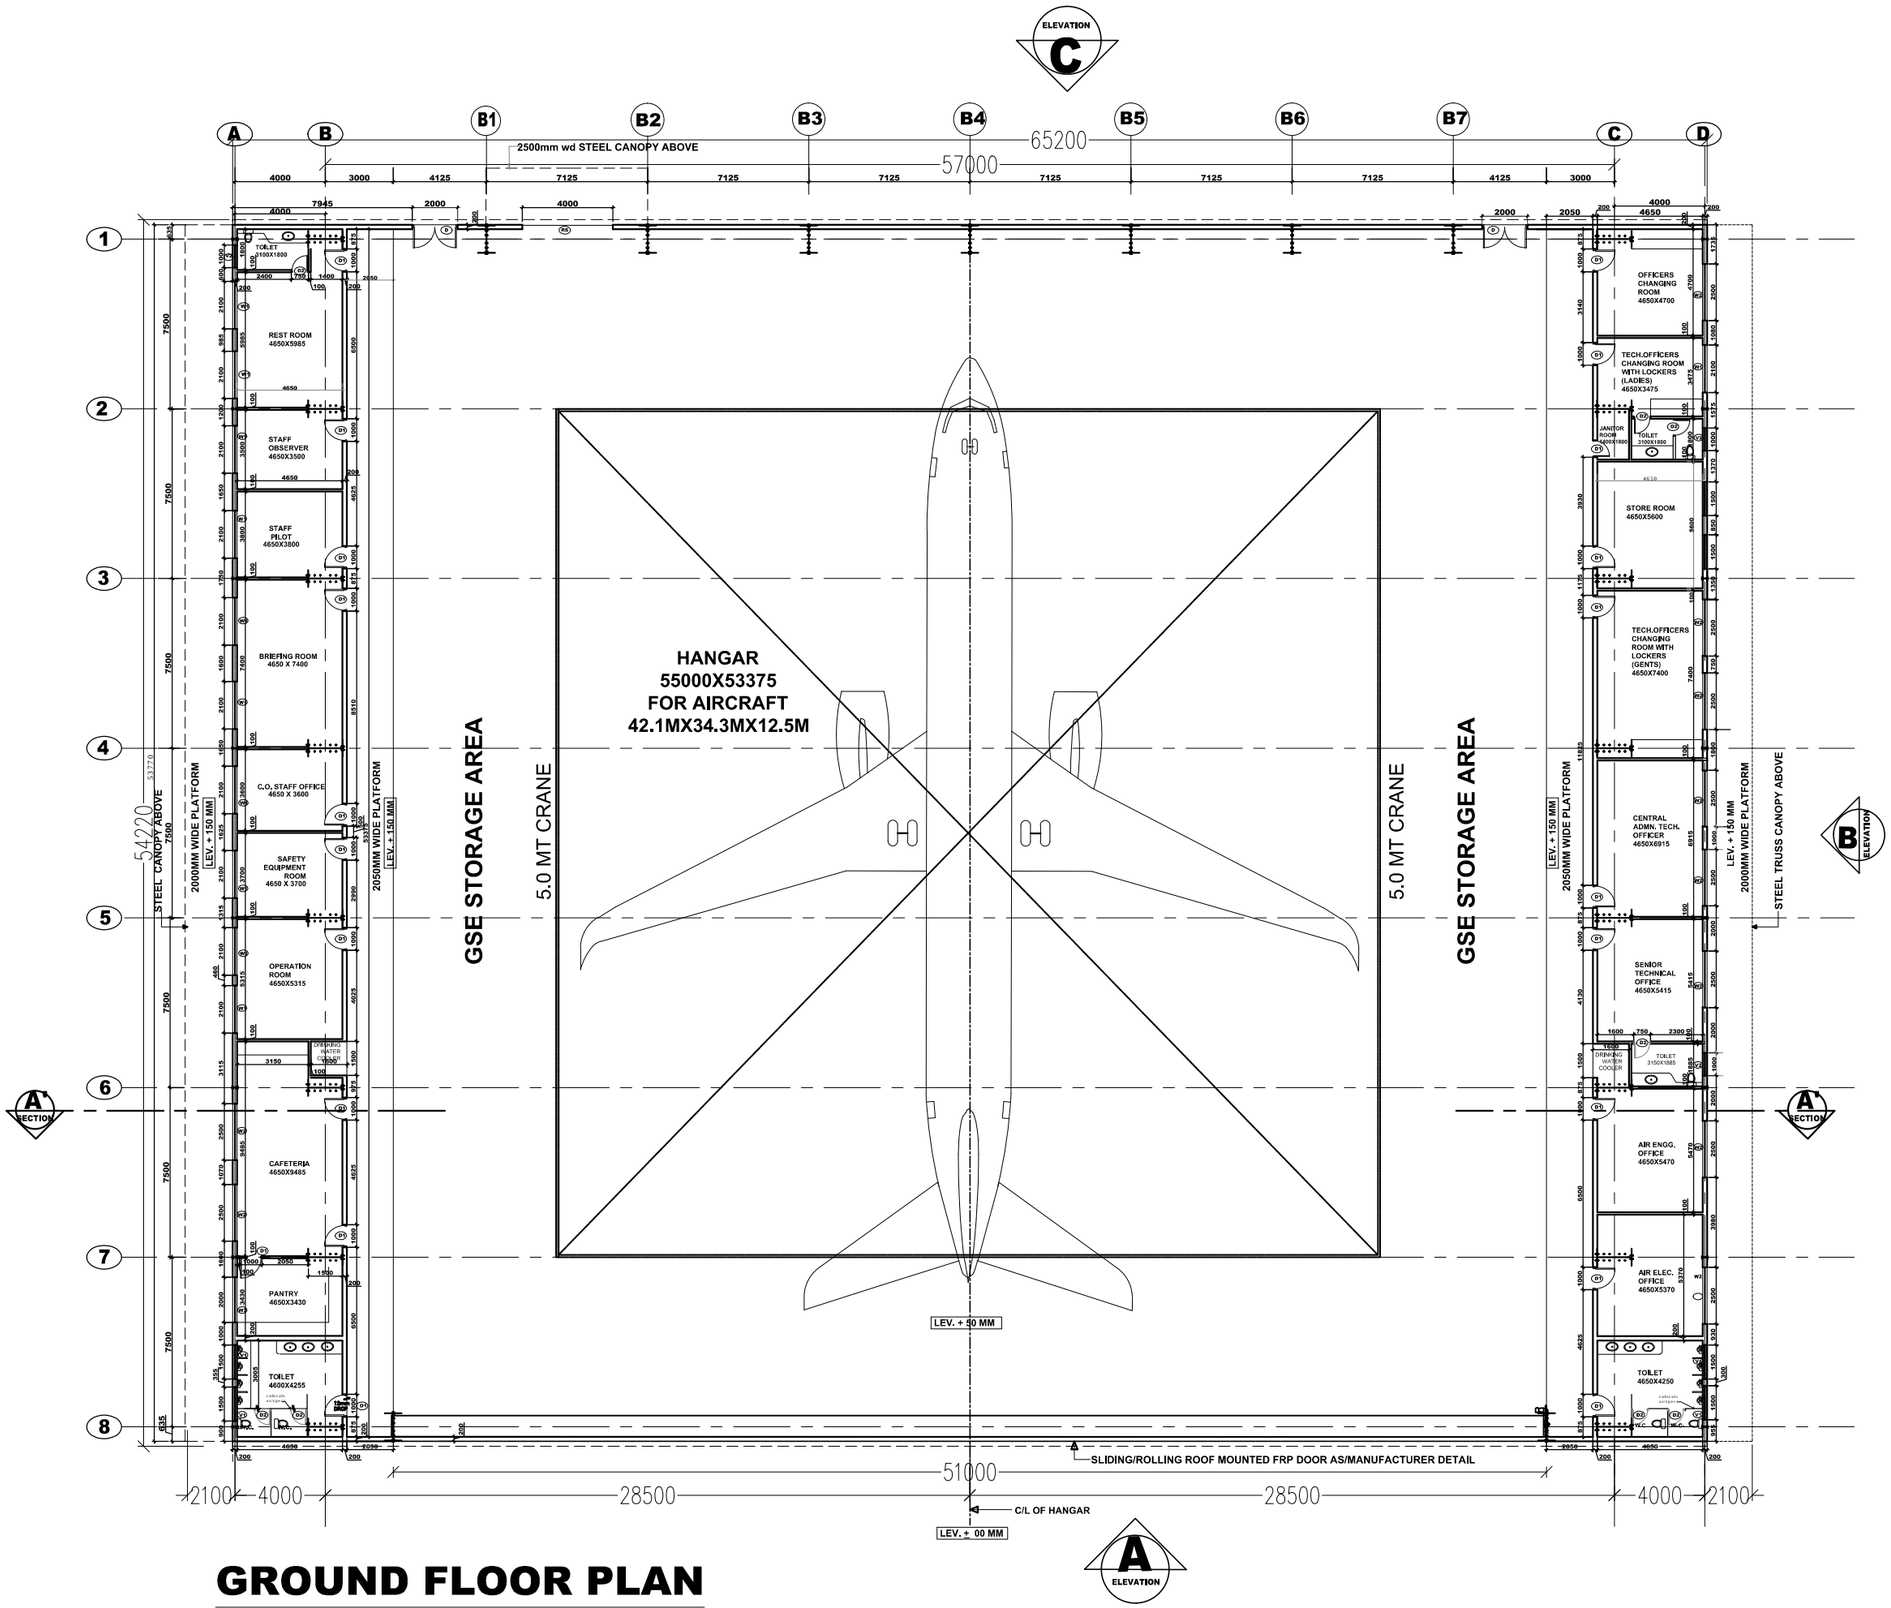


GROUND FLOOR PLAN

NOTES:–

1. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS NOTED OTHERWISE.
2. WRITTEN DIMENSIONS ARE TO BE FOLLOWED. DRAWINGS ARE NOT TO BE SCALED.
3. ANY DISCREPANCY IN THE DRAWING SHALL BE BROUGHT TO THE NOTICE OF THE ENGINEER.
4. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.

AREA STATEMENT

TOTAL PLINTH AREA ON GROUND FLOOR = 65.2X54.22
= 3535.14 SQ.MTS.

SCHEDULE OF OPENINGS (DRAFT)

TOWER	SIZE	SILL	LINTEL	REMARKS
D	2000 X 2700	+ 00	+ 2700	STAFF ENTRY FROM PARKING
D1	1000 X 2100	± 00	+ 2100	DOORS FOR ROOMS AND TOILETS
D2	750 X 2100	± 00	+ 2100	DOORS FOR WC'S
V1	1500 X 450	+ 2100	+ 2550	GLAZED VENTILATORS
V2	1000 X 450	+ 2100	+ 2550	-
W1	2100 X 1650	+ 900	+ 2550	
W2	2500 X 1650	+ 900	+ 2550	
W3	2000 X 1650	+ 900	+ 2550	
RS	4000 X 6000	+ 00	+ 6000	ROLLING SHUTTERS FOR TRUCKS ENTRY AND EXIT

☐ COMPLETION STAGE ☐ CONSTRUCTION STAGE

☑ TENDER STAGE ☐ DPR STAGE

SUFFIX	DATE	INITIALS	DETAILS

REVISIONS

CLIENT

MINISTRY OF EXTERNAL AFFAIRS
(GOVT. OF INDIA)

CONSULTANT

RITES
THE INFRASTRUCTURE PEOPLE
AIRPORTS DIVISION
(ISO – 9001 CERTIFIED)


JOB TITLE

MEA-2


DRAWING TITLE

HANGAR
GROUND FLOOR PLAN

Job. No.		Drg. No. RITES/AP/MEA–2/Arch/HANGAR/01
Scale	Date DEC.2017	Revision Suffix
DRAWN	DEALT	P.CORD. APPROVED BY

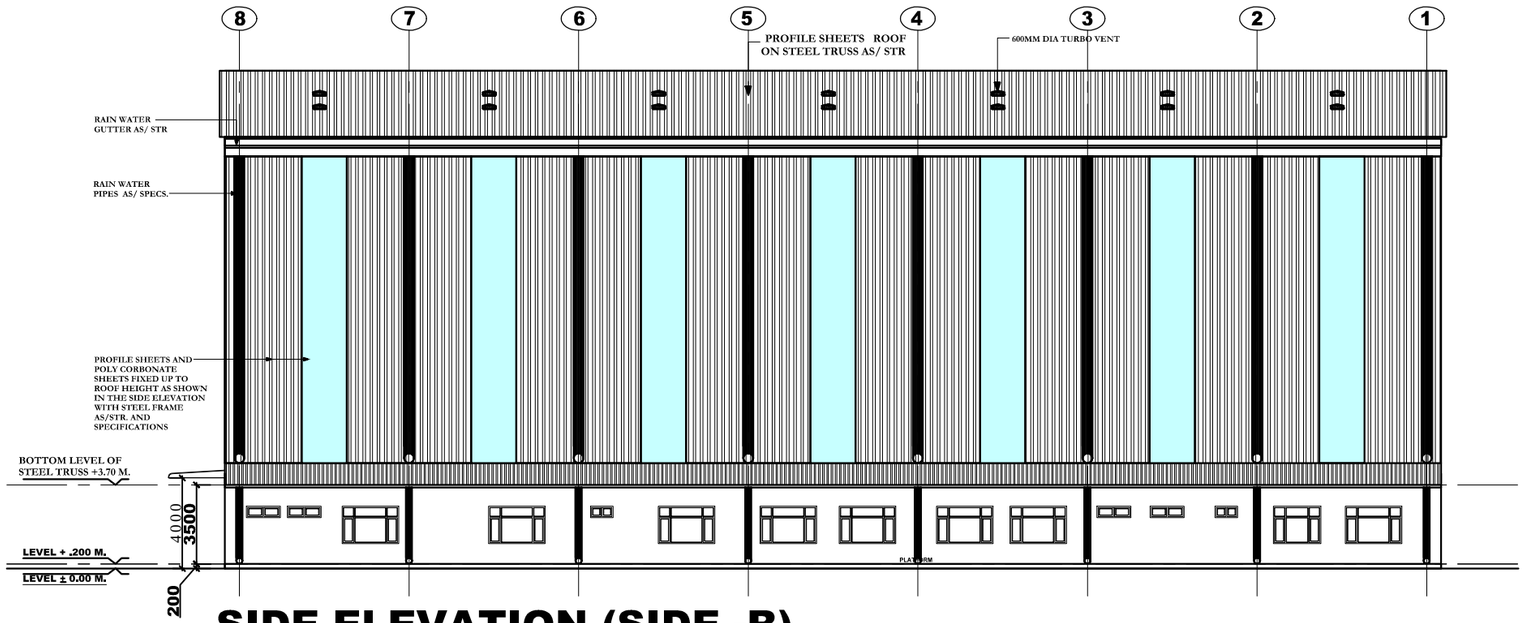

SIDE ELEVATION (SIDE -B)

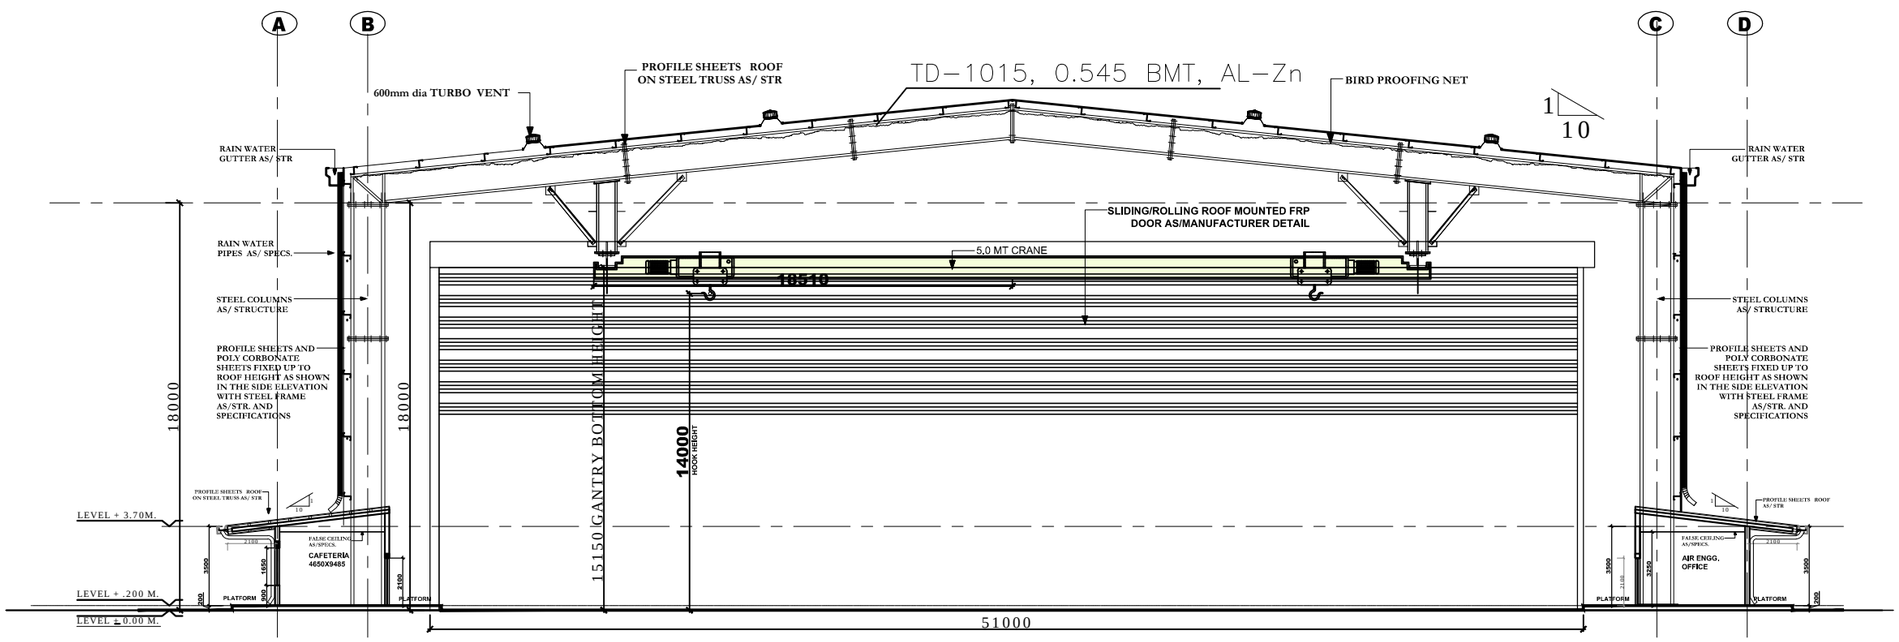

SECTION A-A'

NOTES:–

1. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS NOTED OTHERWISE.
2. WRITTEN DIMENSIONS ARE TO BE FOLLOWED. DRAWINGS ARE NOT TO BE SCALED.
3. ANY DISCREPANCY IN THE DRAWING SHALL BE BROUGHT TO THE NOTICE OF THE ENGINEER.
4. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.

AREA STATEMENT

TOTAL PLINTH AREA ON GROUND FLOOR = 65.2X54.22
= 3535.14 SQ.MTS.

☐ COMPLETION STAGE ☐ CONSTRUCTION STAGE
☑ TENDER STAGE ☐ DPR STAGE

SUFFIX	DATE	INITIALS	DETAILS
REVISIONS			

CLIENT

MINISTRY OF EXTERNAL AFFAIRS
(GOVT. OF INDIA)

CONSULTANT

RITES
THE INFRASTRUCTURE PEOPLE
AIRPORTS DIVISION
(ISO – 9001 CERTIFIED)

JOB TITLE


MEA-2

DRAWING TITLE


HANGAR
SECTION AND ELEVATION

Job. No.		Drg. No.
Scale	Date	RITES/AP/MEA-2/Arch/HANGAR/02
	DEC.2017	Revision Suffix

DRAWN	DEALT	P.CORD.	APPROVED BY

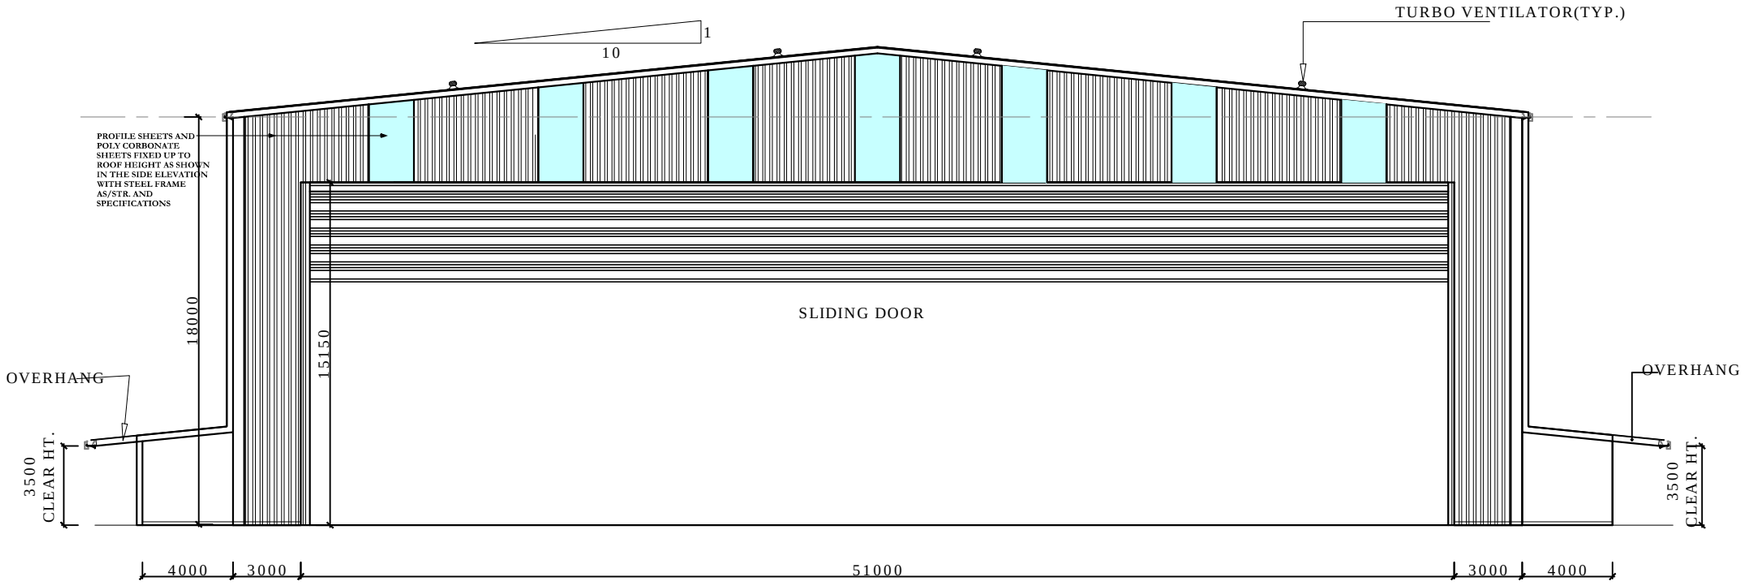

ELEVATION A

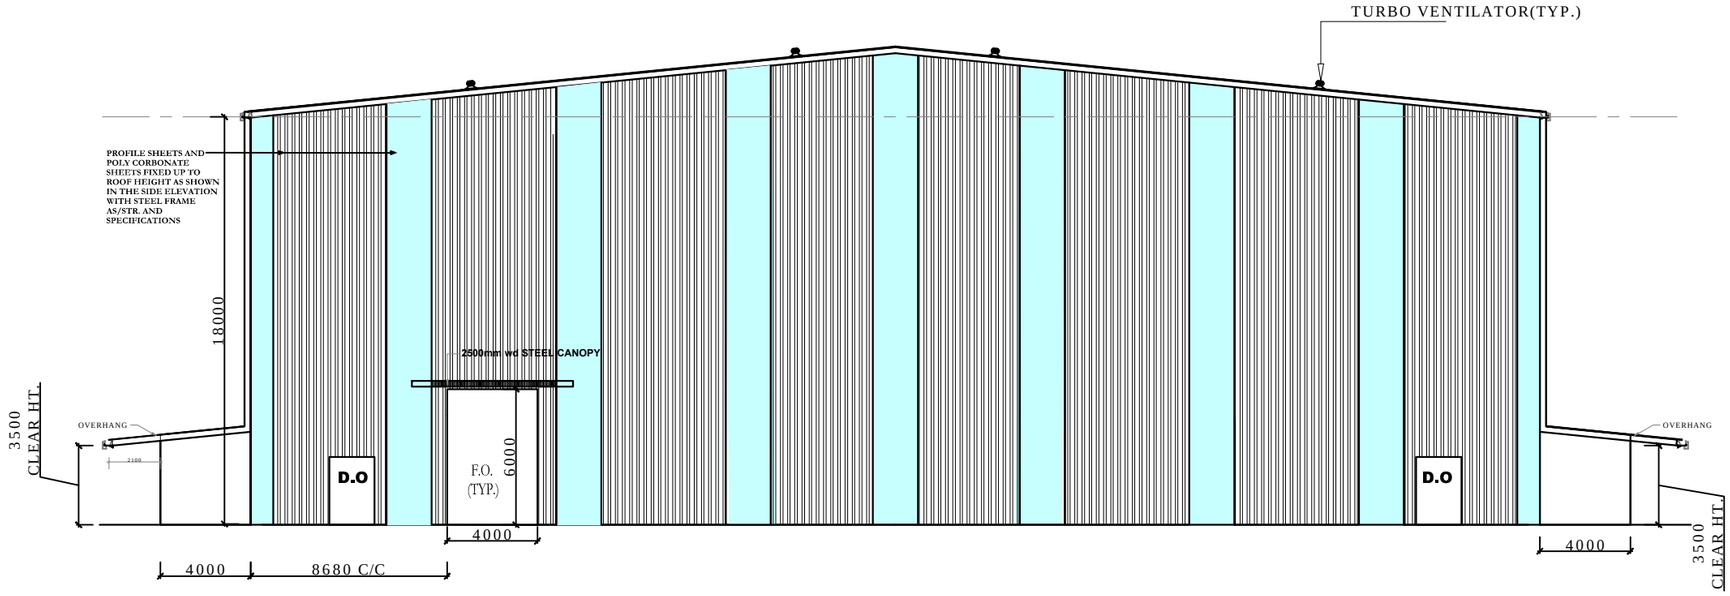

ELEVATION C

NOTES:–

1. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS NOTED OTHERWISE.
2. WRITTEN DIMENSIONS ARE TO BE FOLLOWED. DRAWINGS ARE NOT TO BE SCALED.
3. ANY DISCREPANCY IN THE DRAWING SHALL BE BROUGHT TO THE NOTICE OF THE ENGINEER.
4. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.

AREA STATEMENT

TOTAL PLINTH AREA ON GROUND FLOOR = 65.2X54.22
= 3535.14 SQ.MTS.

☐ COMPLETION STAGE ☐ CONSTRUCTION STAGE
☑ TENDER STAGE ☐ DPR STAGE

SUFFIX	DATE	INITIALS	DETAILS

REVISIONS


CLIENT
MINISTRY OF EXTERNAL AFFAIRS
(GOVT. OF INDIA)

CONSULTANT
RITES
THE INFRASTRUCTURE PEOPLE
AIRPORTS DIVISION
(ISO – 9001 CERTIFIED)

JOB TITLE
MEA-2

DRAWING TITLE
HANGAR
ELEVATIONS

Job. No.		Drg. No. RITES/AP/MEA-2/Arch/HANGAR/03
Scale	Date DEC 2017	Revision Suffix
DRAWN	DEALT	P.CORD. APPROVED BY

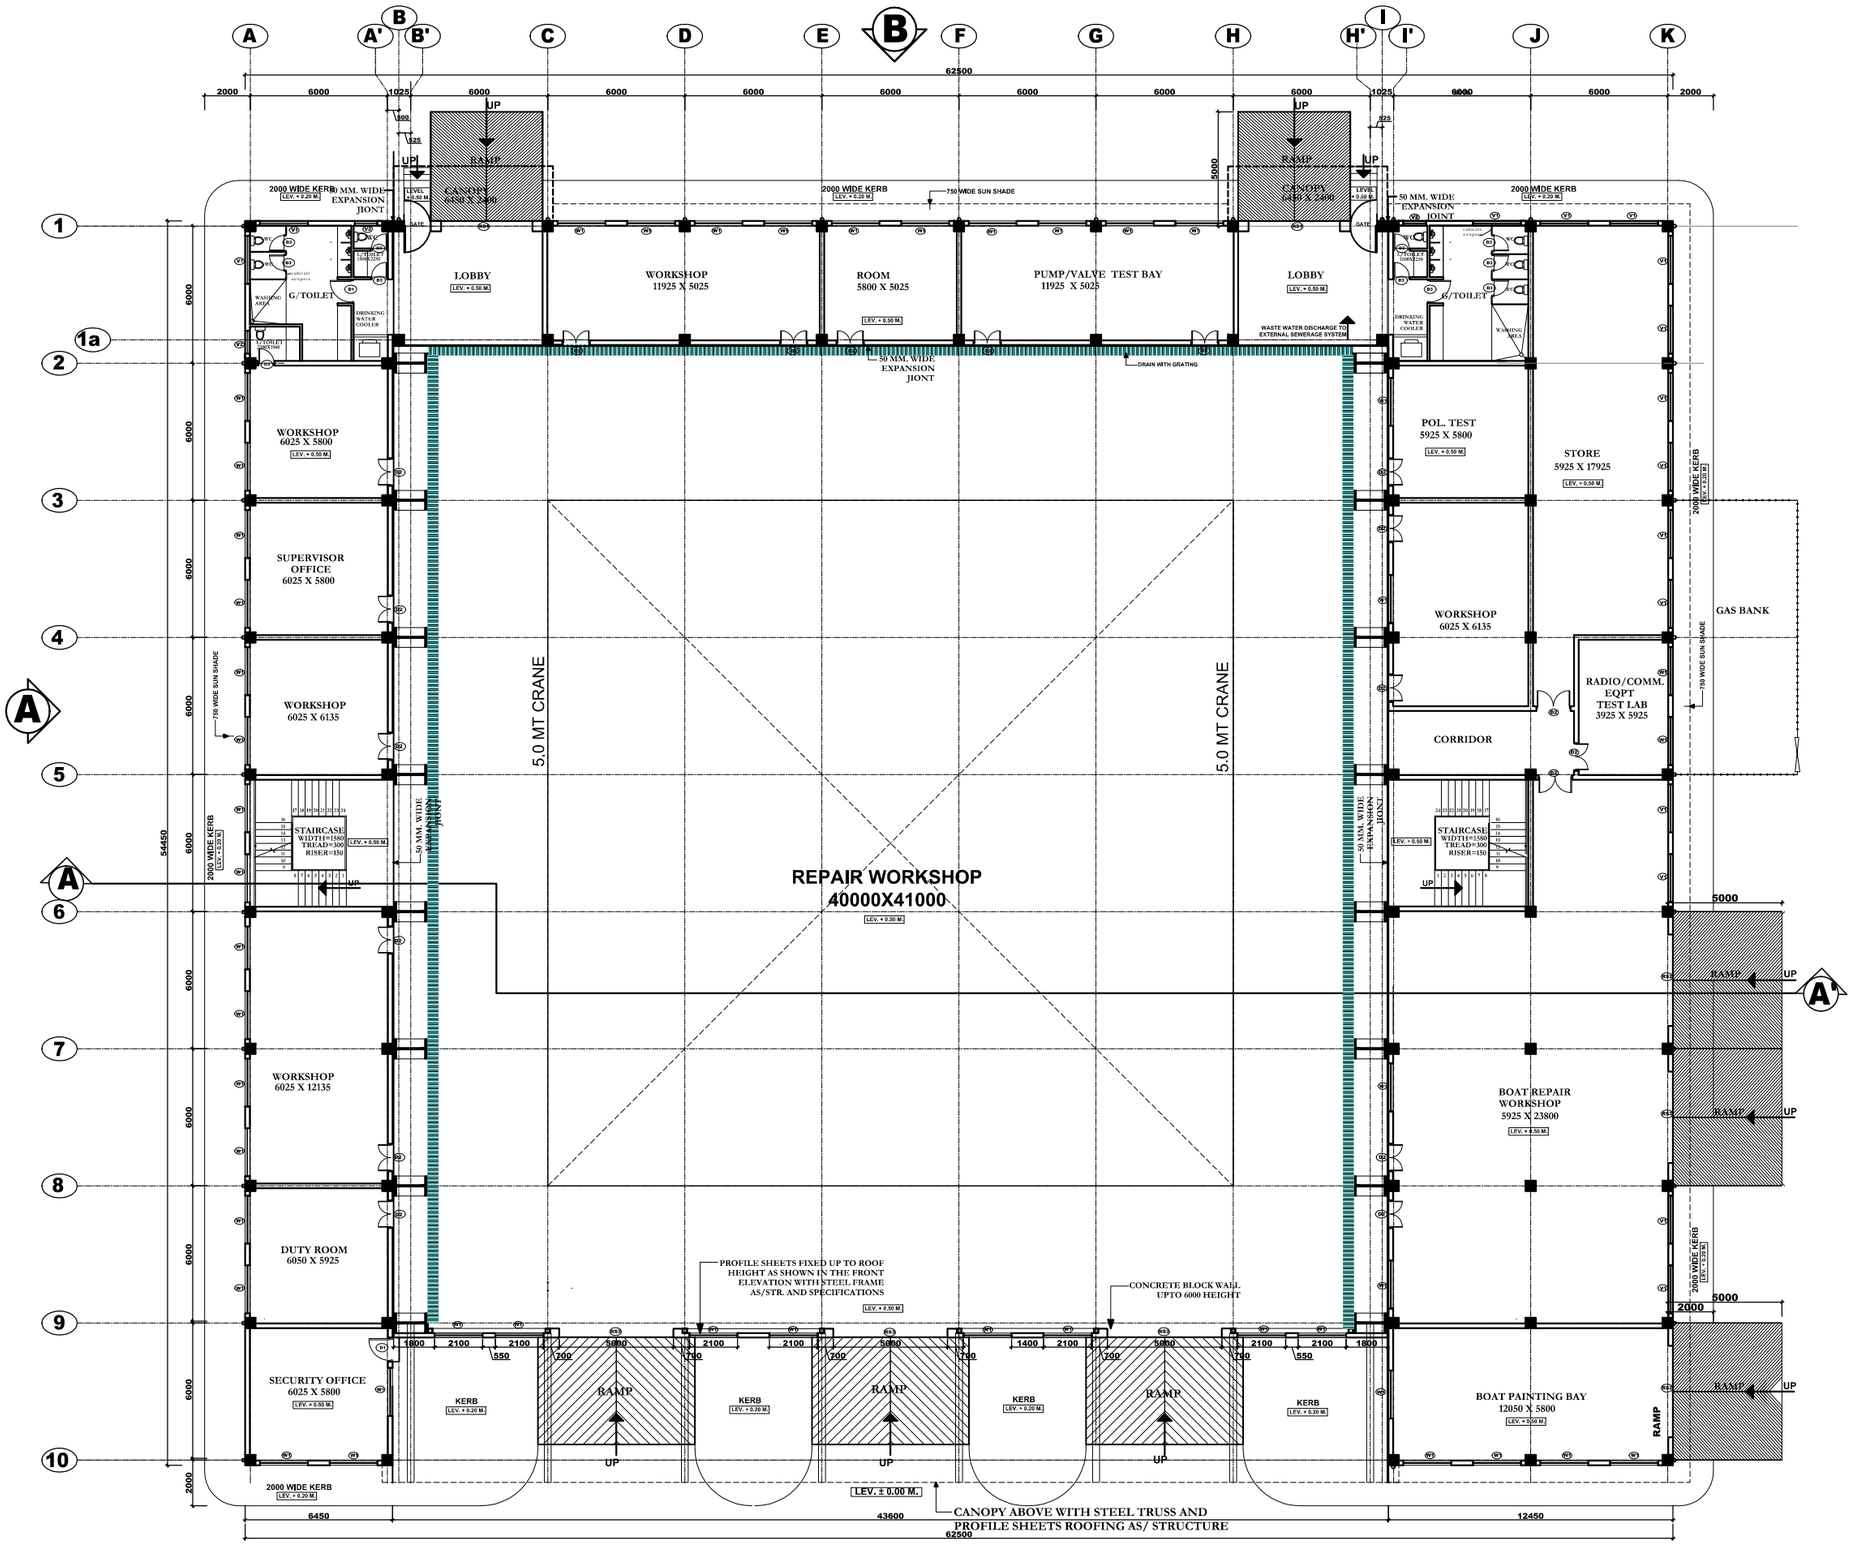

GROUND FLOOR PLAN

NOTES:–

1. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS NOTED OTHERWISE.
2. WRITTEN DIMENSIONS ARE TO BE FOLLOWED. DRAWINGS ARE NOT TO BE SCALED.
3. ANY DISCREPANCY IN THE DRAWING SHALL BE BROUGHT TO THE NOTICE OF THE ENGINEER.
4. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.

AREA STATEMENT

1. TOTAL PLINTH AREA ON GROUND FLOOR INCLUDING FRONT CANOPY = 3403.12 SQ. MTS.

2. TOTAL PLINTH AREA ON FIRST FLOOR = 1152.23 SQ. MTS.

TOTAL AREA ON BOTH FLOORS=4555.2 SQM

SCHEDULE OF OPENINGS (DRAFT)

TOWER	SIZE	SILL	LINTEL	REMARKS
RS1	4000 X 4500	± 00	+ 4500	ROLLING SHUTTERS AT GROUND FLOOR FOR VEHICAL ENTRY AND EXIT
RS2	4000 X 2700	+ 00	+ 4500	ROLLING SHUTTERS AT GROUND FLOOR FOR BOAT REPAIR WORKSHOP
RS3	5000 X 5500	+ 00	+ 5500	ROLLING SHUTTERS AT GROUND FLOOR BOAT ENTRY
D1	1050 X 2100	± 00	+ 2100	AT GROUND FLOOR AND FIRST FLOOR (OFFICE/TOILET ENTRY DOOR)
D2	1200 X 2100	± 00	+ 2100	AT GROUND FLOOR AND FIRST FLOOR (OFFICE/LAB/WORKSHOP DOOR)
D3	750 X 2100	+ 00	+ 2100	AT GROUND FLOOR AND FIRST FLOOR (TOILET DOORS)
G4	4000 X 2000	+ 900	+ 2900	AT FIRST FLOOR (FIXED GLAZING)
G5	2100 X 2000	+ 900	+ 2900	-
W1	2100 X 2000	+ 900	+ 2900	AT GROUND FLOOR AND FIRST FLOOR (FIXED AND OPENABLE WINDOWS)
V1	2100 X 800	+ 2100	+ 2900	AT GROUND FLOOR AND FIRST FLOOR (FIXED AND OPENABLE VENTILATORS)
V2	1000 X 800	+ 2100	+ 2900	AT GROUND FLOOR AND FIRST FLOOR (FIXED AND OPENABLE VENTILATORS)

☐ COMPLETION STAGE ☐ CONSTRUCTION STAGE

☑ TENDER STAGE ☐ DPR STAGE

SUFFIX	DATE	INITIALS	DETAILS
REVISIONS			

CLIENT

MINISTRY OF EXTERNAL AFFAIRS
(GOVT. OF INDIA)

CONSULTANT

RITES
THE INFRASTRUCTURE PEOPLE
AIRPORTS DIVISION
(ISO – 9001 CERTIFIED)


JOB TITLE

MEA-2

DRAWING TITLE

REPAIR □ OR□SHOP
GROUND FLOOR PLAN

Job. No.		Drg. No. RITES/AP/MEA–2/Arch/REPAIR WORKS/01
Scale	Date	Revision Suffix
	DEC.2017	
DRAWN	DEALT	P.CORD. APPROVED BY

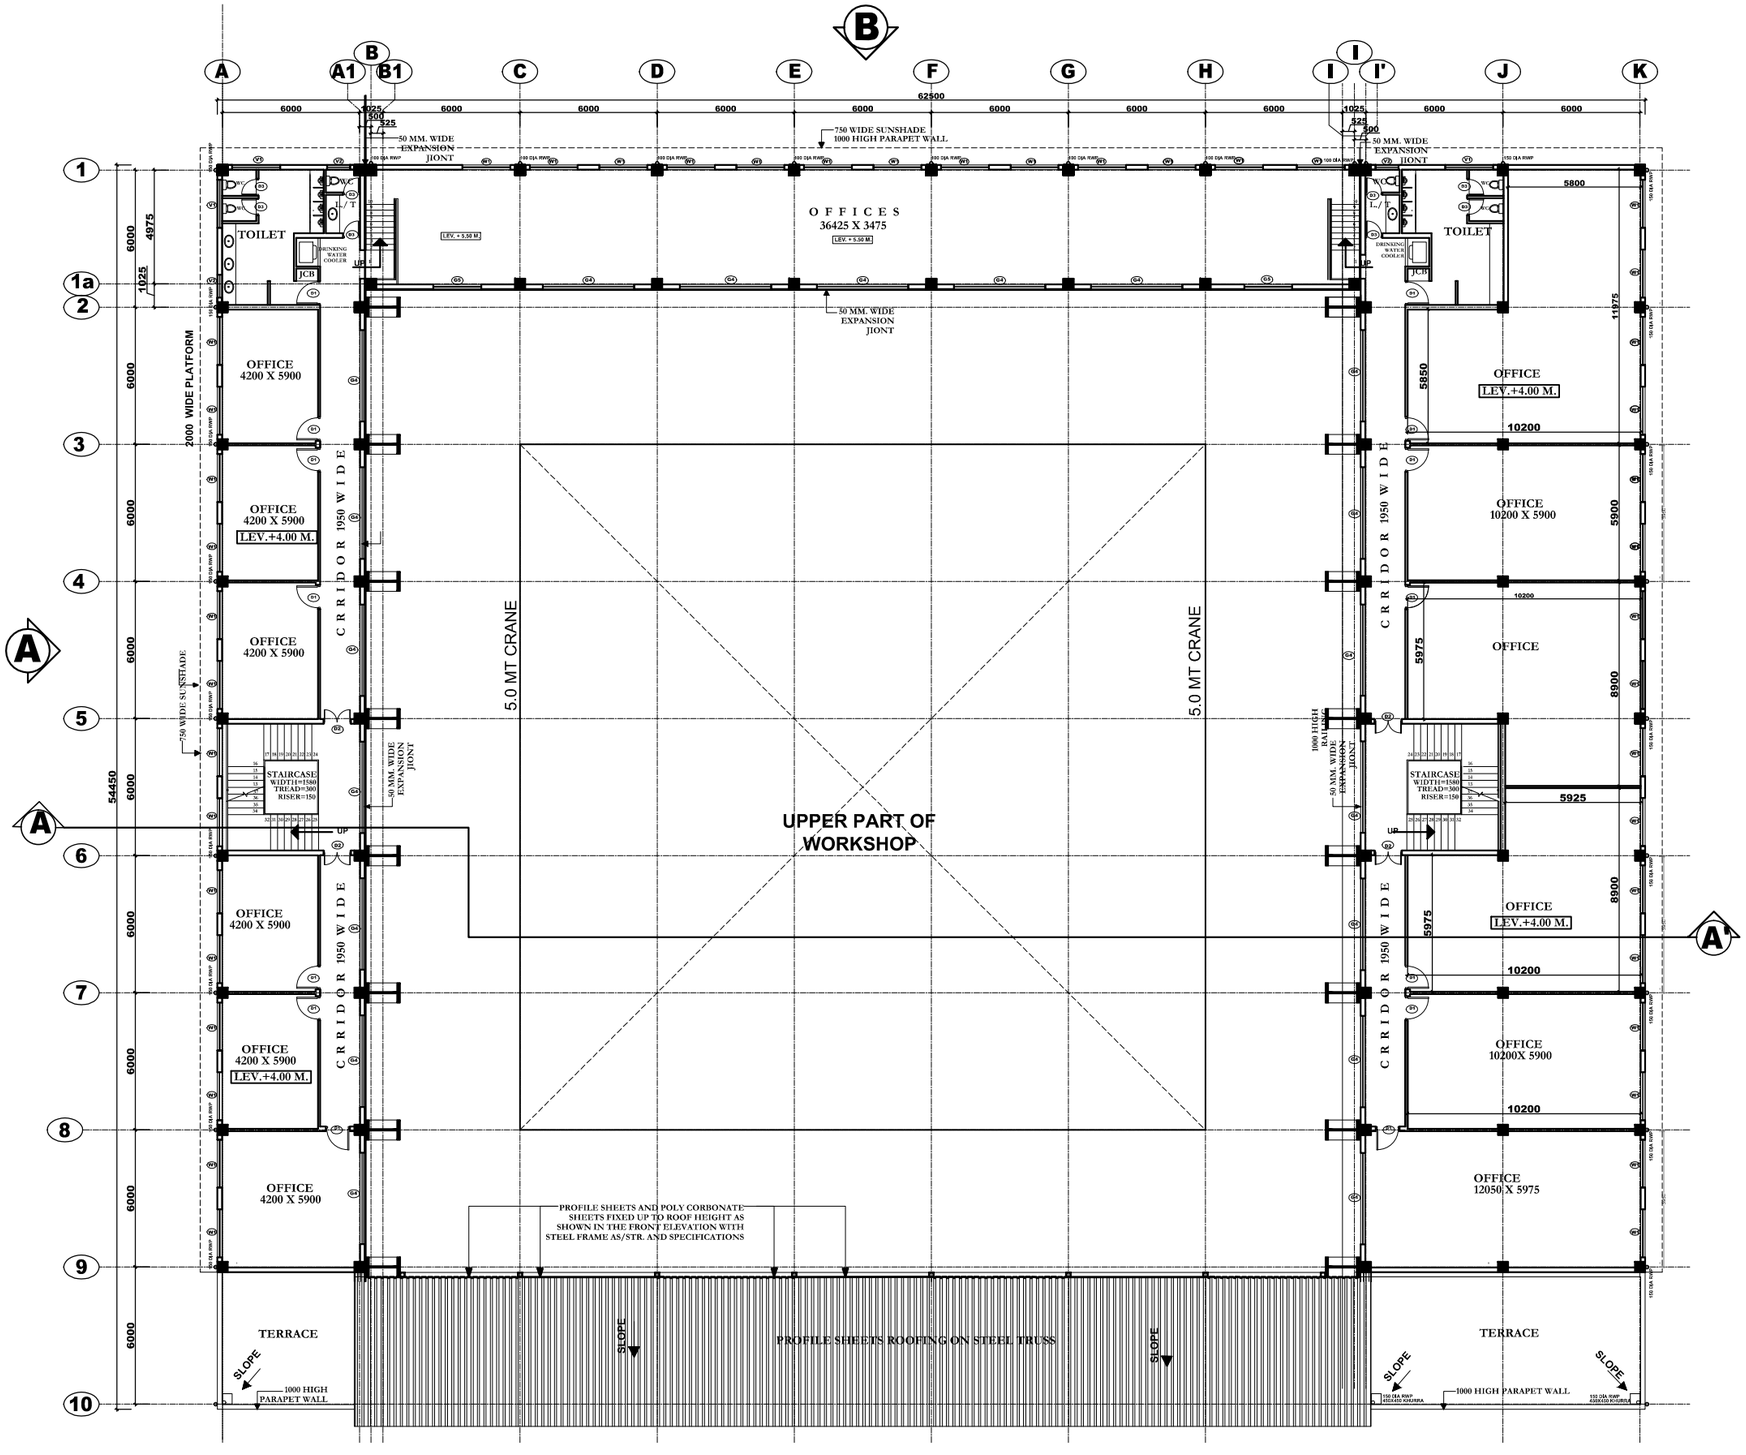

FIRST FLOOR PLAN

NOTES:–

1. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS NOTED OTHERWISE.
2. WRITTEN DIMENSIONS ARE TO BE FOLLOWED. DRAWINGS ARE NOT TO BE SCALED.
3. ANY DISCREPANCY IN THE DRAWING SHALL BE BROUGHT TO THE NOTICE OF THE ENGINEER.
4. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.

AREA STATEMENT

1. TOTAL PLINTH AREA ON GROUND FLOOR INCLUDING FRONT CANOPY = 3403.12 SQ. MTS.

2. TOTAL PLINTH AREA ON FIRST FLOOR = 1152.23 SQ. MTS.
TOTAL AREA ON BOTH FLOORS=4555.2 SQM

SCHEDULE OF OPENINGS (DRAFT)

TOWER	SIZE	SILL	LINTEL	REMARKS
RS1	4000 X 4500	± 00	+ 4500	ROLLING SHUTTERS AT GROUND FLOOR FOR VEHICAL ENTRY AND EXIT
RS2	4000 X 2700	+ 00	+ 4500	ROLLING SHUTTERS AT GROUND FLOOR FOR BOAT REPAIR WORKSHOP
RS3	5000 X 5500	+ 00	+ 5500	ROLLING SHUTTERS AT GROUND FLOOR BOAT ENTRY
D1	1050 X 2100	± 00	+ 2100	AT GROUND FLOOR AND FIRST FLOOR (OFFICE/TOILET ENTRY DOOR)
D2	1200 X 2100	± 00	+ 2100	AT GROUND FLOOR AND FIRST FLOOR (OFFICE/LAB/WORKSHOP DOOR)
D3	750 X 2100	+ 00	+ 2100	AT GROUND FLOOR AND FIRST FLOOR (TOILET DOORS)
G4	4000 X 2000	+ 900	+ 2900	AT FIRST FLOOR (FIXED GLAZING)
G5	2100 X 2000	+ 900	+ 2900	-
W1	2100 X 2000	+ 900	+ 2900	AT GROUND FLOOR AND FIRST FLOOR (FIXED AND OPENABLE WINDOWS)
V1	2100 X 800	+ 2100	+ 2900	AT GROUND FLOOR AND FIRST FLOOR (FIXED AND OPENABLE VENTILATORS)
V2	1000 X 800	+ 2100	+ 2900	AT GROUND FLOOR AND FIRST FLOOR (FIXED AND OPENABLE VENTILATORS)

☐ COMPLETION STAGE ☐ CONSTRUCTION STAGE

☑ TENDER STAGE ☐ DPR STAGE

SUFFIX	DATE	INITIALS	DETAILS

REVISIONS


CLIENT
MINISTRY OF EXTERNAL AFFAIRS
(GOVT. OF INDIA)

CONSULTANT
RITES
THE INFRASTRUCTURE PEOPLE
AIRPORTS DIVISION
(ISO – 9001 CERTIFIED)


JOB TITLE
MEA-2

DRAWING TITLE
REPAIR ☐ OR☐SHOP
FIRST FLOOR PLAN

Job. No.		Drg. No. RITES/AP/MEA–2/Arch/REPAIR WORKS/02
Scale	Date	Revision Suffix
	DEC.2017	
DRAWN	DEALT	P.CORD. APPROVED BY

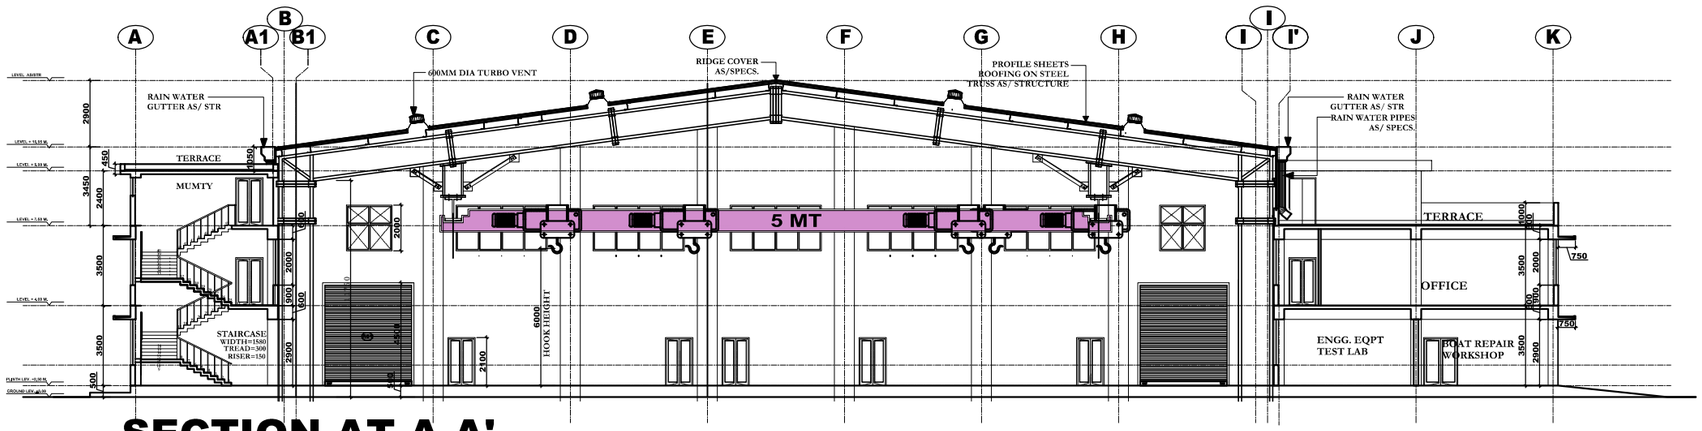

SECTION AT A-A'

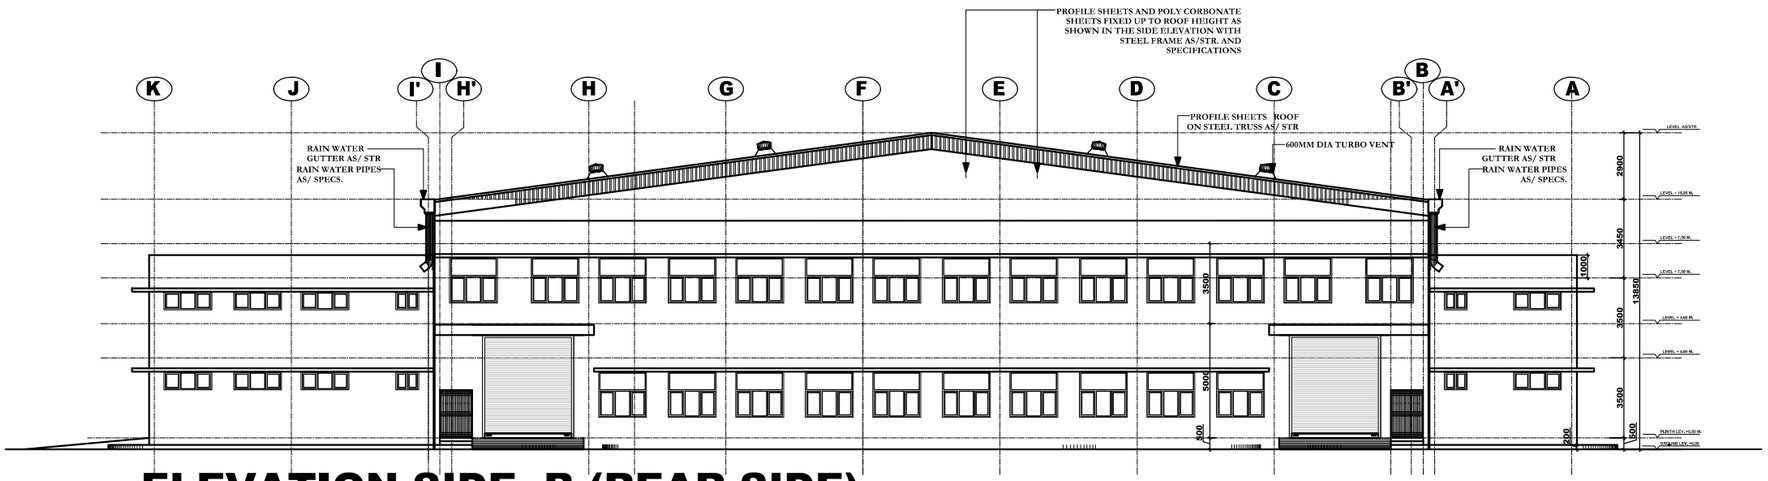

ELEVATION SIDE -B (REAR SIDE)



ELEVATION SIDE -A

NOTES:–

1. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS NOTED OTHERWISE.
2. WRITTEN DIMENSIONS ARE TO BE FOLLOWED. DRAWINGS ARE NOT TO BE SCALED.
3. ANY DISCREPANCY IN THE DRAWING SHALL BE BROUGHT TO THE NOTICE OF THE ENGINEER.
4. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.

☐ COMPLETION STAGE ☐ CONSTRUCTION STAGE

☑ TENDER STAGE ☐ DPR STAGE

SUFFIX	DATE	INITIALS	DETAILS

REVISIONS

CLIENT

MINISTRY OF EXTERNAL AFFAIRS
(GOVT. OF INDIA)

CONSULTANT

RITES
THE INFRASTRUCTURE PEOPLE
AIRPORTS DIVISION
(ISO – 9001 CERTIFIED)


JOB TITLE

MEA-2

DRAWING TITLE

REPAIR WORKSHOP
SECTION &ELEVATIONS

Job. No.		Drg. No. RITES/AP/MEA–2/Arch/REPAIR WORKS/03
Scale	Date DEC.2017	Revision Suffix
DRAWN	DEALT	P.CORD. APPROVED BY

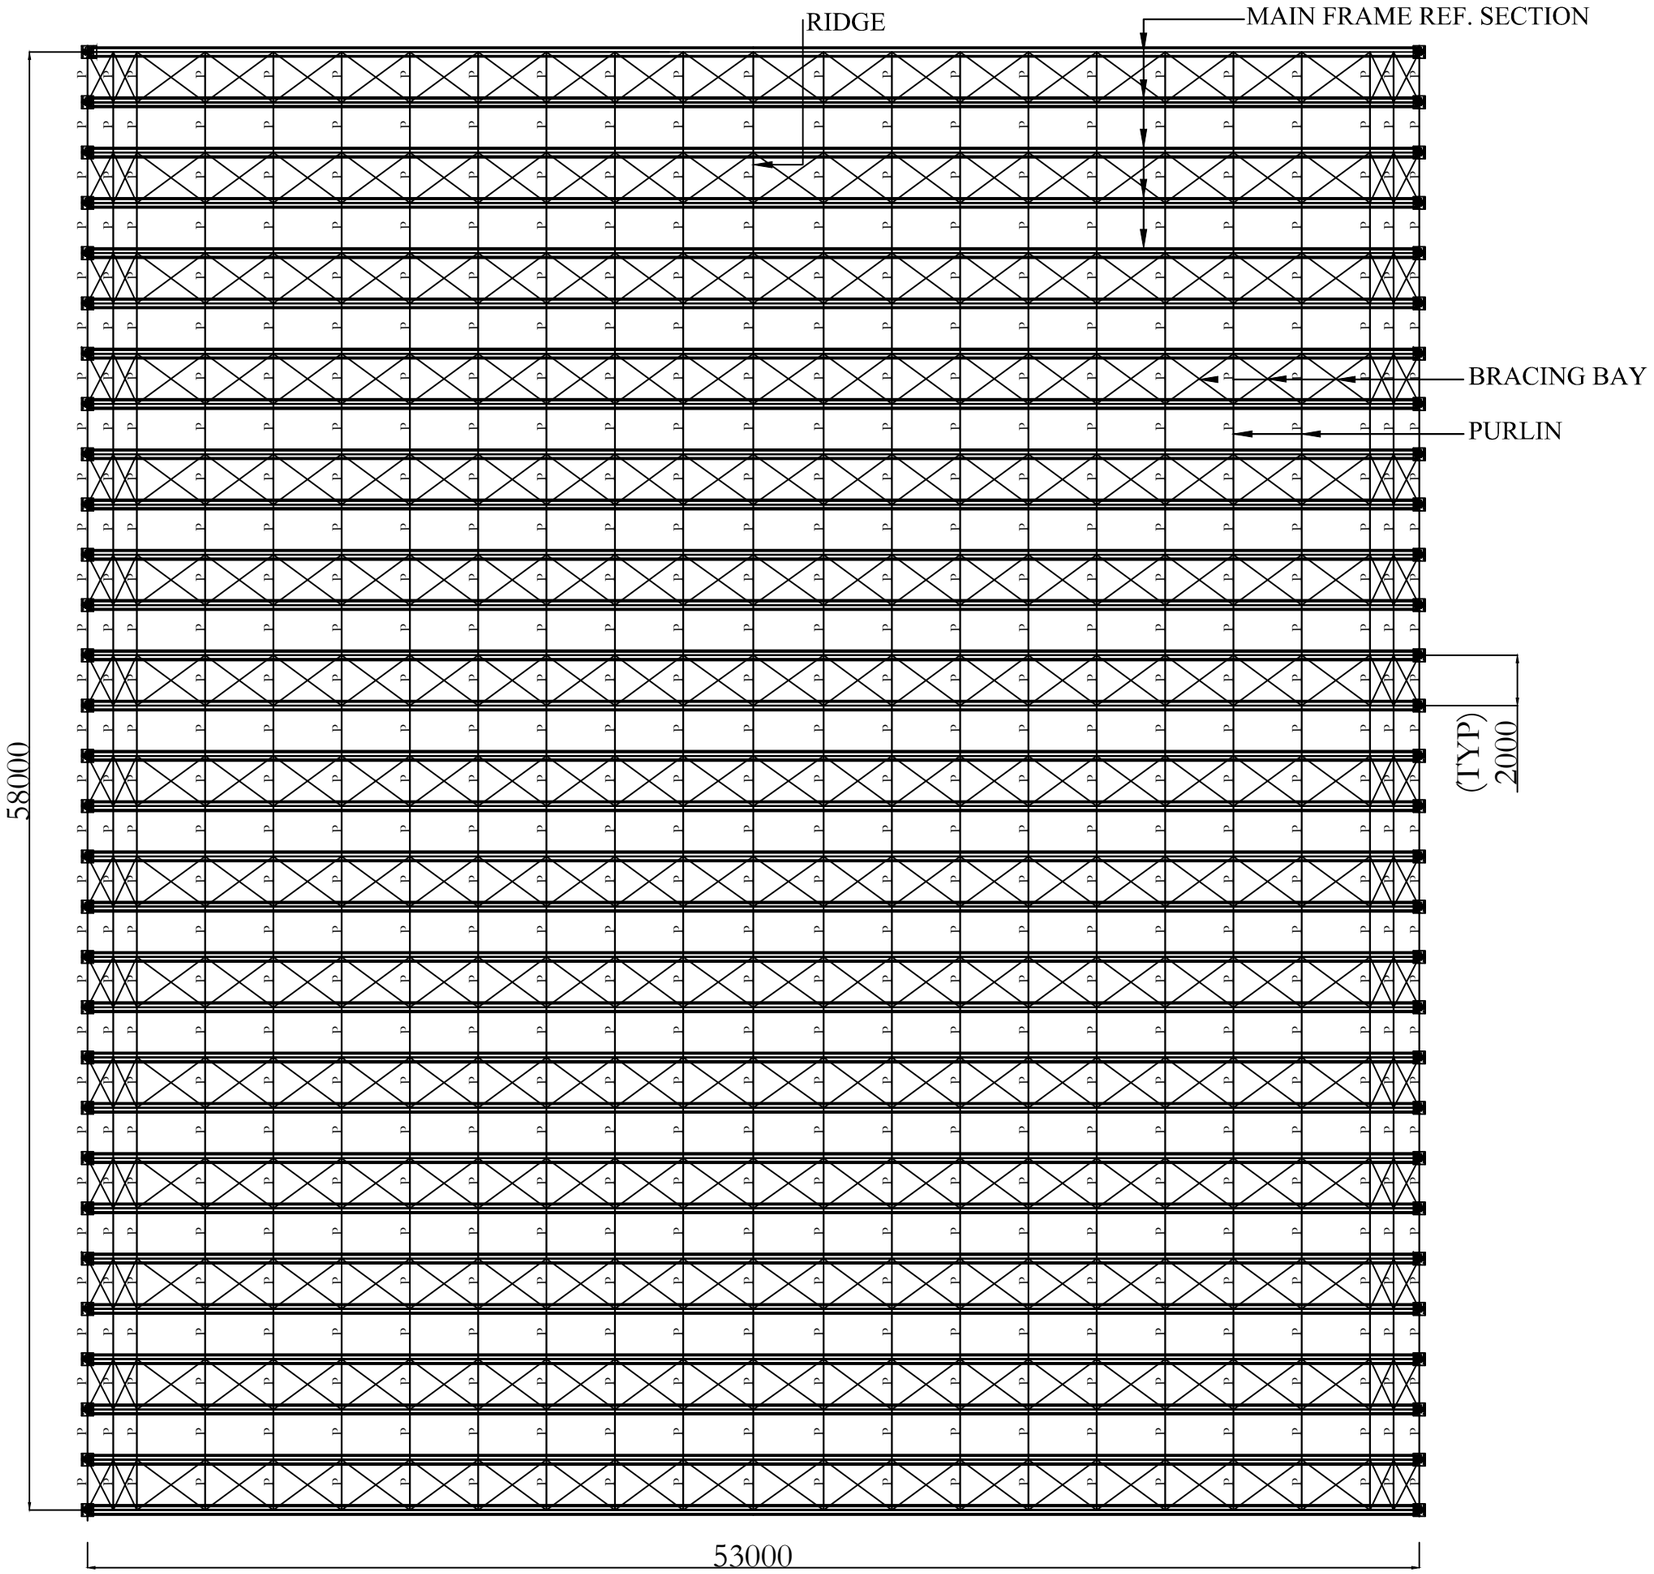

PLAN

NOTES:–

1.	ALL DIMENSIONS ARE IN MILLIMETERS UNLESS NOTED OTHERWISE.
2.	WRITTEN DIMENSIONS ARE TO BE FOLLOWED. DRAWINGS ARE NOT TO BE SCALED.
3.	ANY DISCREPANCY IN THE DRAWING SHALL BE BROUGHT TO THE NOTICE OF THE ENGINEER.
4.	THIS DRAWING SHALL BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.

AREA STATEMENT

TOTAL PLINTH AREA ON GROUND FLOOR =3074 SQM

NOTES:

1. UNLESS OTHERWISE SPECIFED: DIMENSIONS ARE IN MILLIMETERS
2. DIMENSIONS AND DESIGN SHOWN ARE ONLY FOR INITIAL INFORMATION PURPOSE

☐ COMPLETION STAGE ☐ CONSTRUCTION STAGE

☑ TENDER STAGE ☐ DPR STAGE

SUFFIX	DATE	INITIALS	DETAILS

REVISIONS

CLIENT

MINISTRY OF EXTERNAL AFFAIRS
(GOVT. OF INDIA)

CONSULTANT

RITES
THE INFRASTRUCTURE PEOPLE
AIRPORTS DIVISION
(ISO – 9001 CERTIFIED)


JOB TITLE

MEA-2


DRAWING TITLE

RESS SHED
FLOOR PLAN

Job. No.		Drg. No.	RITES/AP/MEA-2/Arch/RESS/01
Scale	Date	Revision Suffix	
	dec 2017		
DRAWN	DEALT	P.CORD.	APPROVED BY

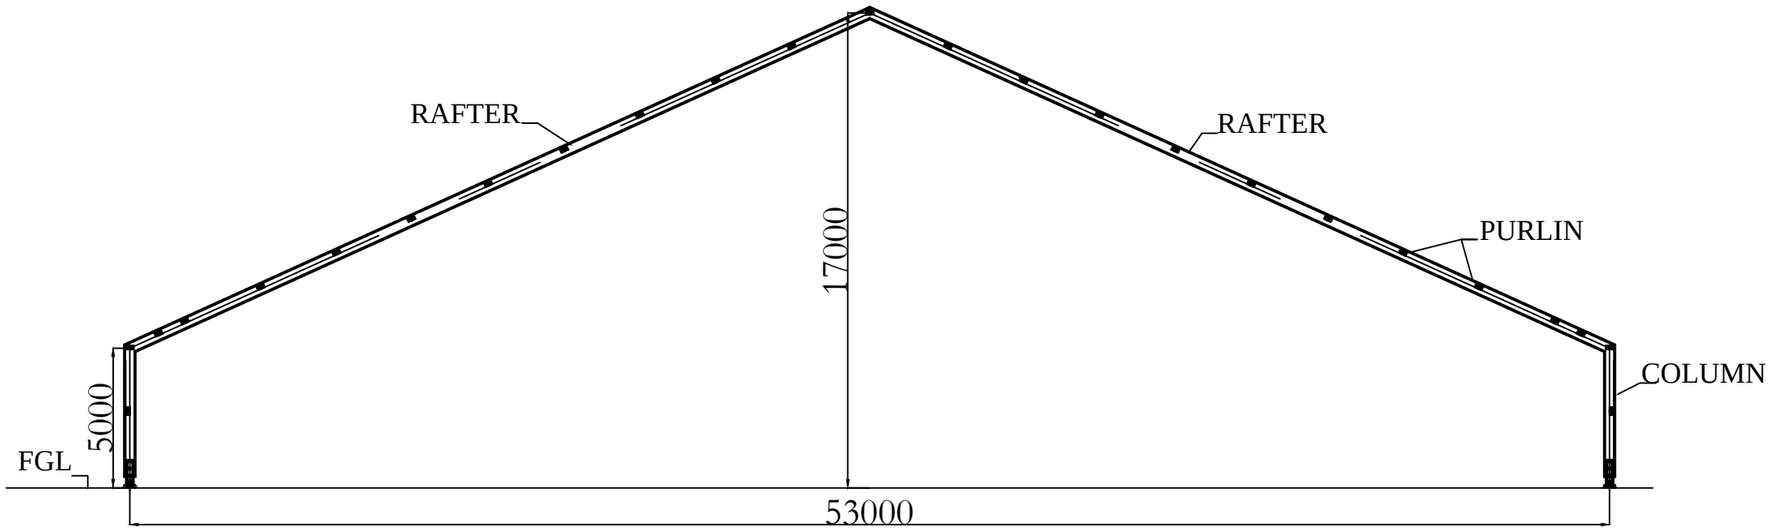

FRONT ELEVATION

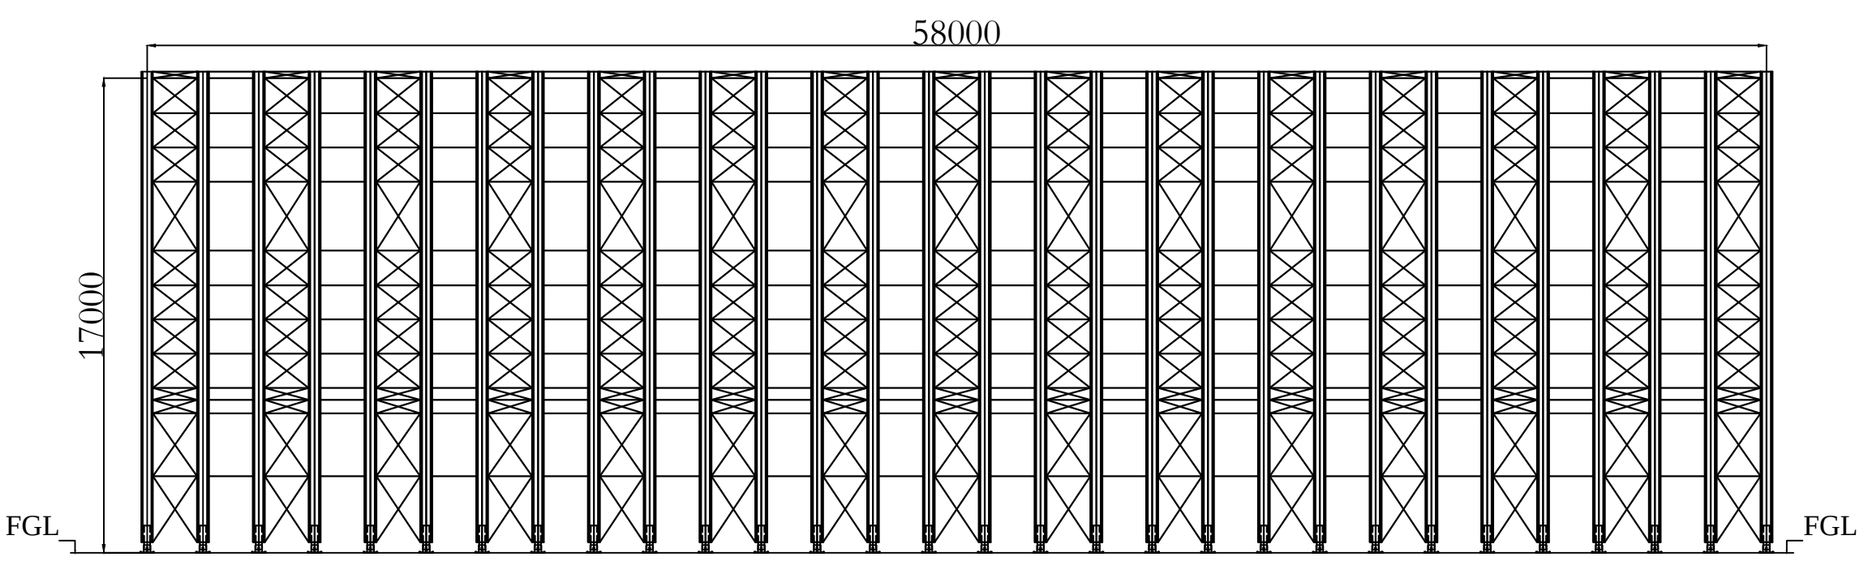

SIDE ELEVATION

NOTES:–

1.	ALL DIMENSIONS ARE IN MILLIMETERS UNLESS NOTED OTHERWISE.
2.	WRITTEN DIMENSIONS ARE TO BE FOLLOWED. DRAWINGS ARE NOT TO BE SCALED.
3.	ANY DISCREPANCY IN THE DRAWING SHALL BE BROUGHT TO THE NOTICE OF THE ENGINEER.
4.	THIS DRAWING SHALL BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.

NOTES:

1. UNLESS OTHERWISE SPECIFED: DIMENSIONS ARE IN MILLIMETERS
2. DIMENSIONS AND DESIGN SHOWN ARE ONLY FOR INITIAL INFORMATION PURPOSE

RAPID ERECT SUN SHELTERS

WIDTH	-	53 M
APEX HEIGHT	-	17 M
EAVE HEIGHT	-	05 M
LENGTH	-	58 M
WIND SPEED	-	300 KMPH WITH 3 SEC GUST
BAY SPACING	-	INDICATED BASE SPACING IS ONLY FOR REFERENCE. VENDOR TO DESIGN TO MEET DESIGN REQUIREMENT
FOUNDATION	-	VENDOR TO ADVISE
CLADDING	-	HIGH STRENGTH FABRIC, FLAME RESISTANCE TO NFPA 701 METHOD 2 OR EQUIVALENT
BIRD PROOFING	-	REQUIRED
STRUCTURAL MEMBERS	-	ALUMINIUM BOX BEAM
WIND LOAD	-	IS 875 PART 3

☐ COMPLETION STAGE ☐ CONSTRUCTION STAGE

☑ TENDER STAGE ☐ DPR STAGE

SUFFIX	DATE	INITIALS	DETAILS

REVISIONS

CLIENT

MINISTRY OF EXTERNAL AFFAIRS
(GOVT. OF INDIA)

CONSULTANT

RITES
THE INFRASTRUCTURE PEOPLE
AIRPORTS DIVISION
(ISO – 9001 CERTIFIED)


JOB TITLE


MEA-2

DRAWING TITLE

RESS SHED
SECTION & ELEVATION

Job. No.		Drg. No.	RITES/AP/MEA-2/Arch/RESS/02
Scale	Date	Revision Suffix	
	dec 2017		
DRAWN	DEALT	P.CORD.	APPROVED BY

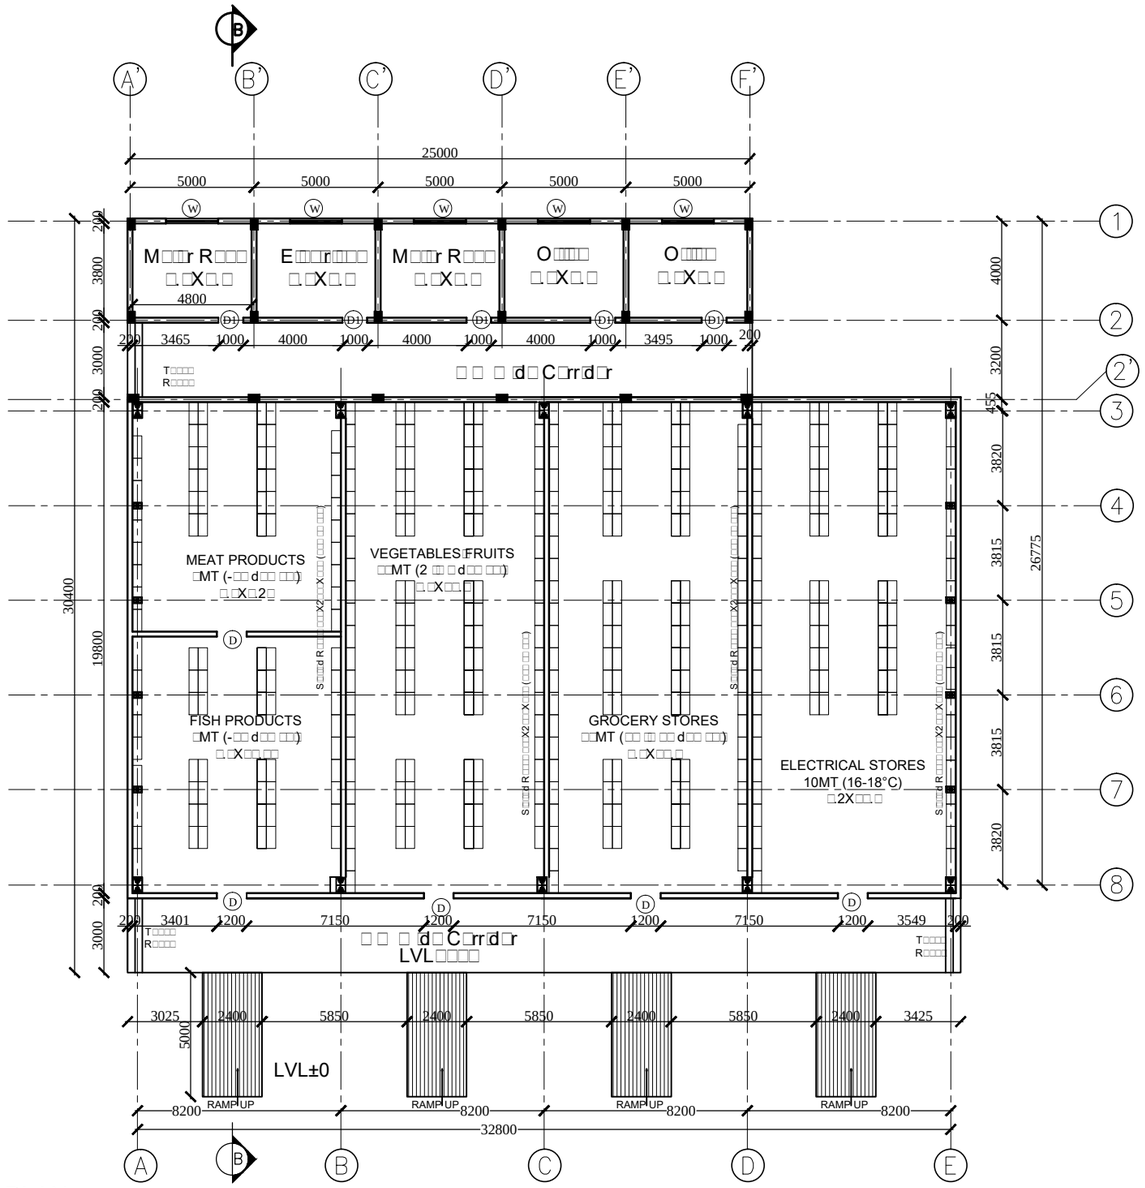

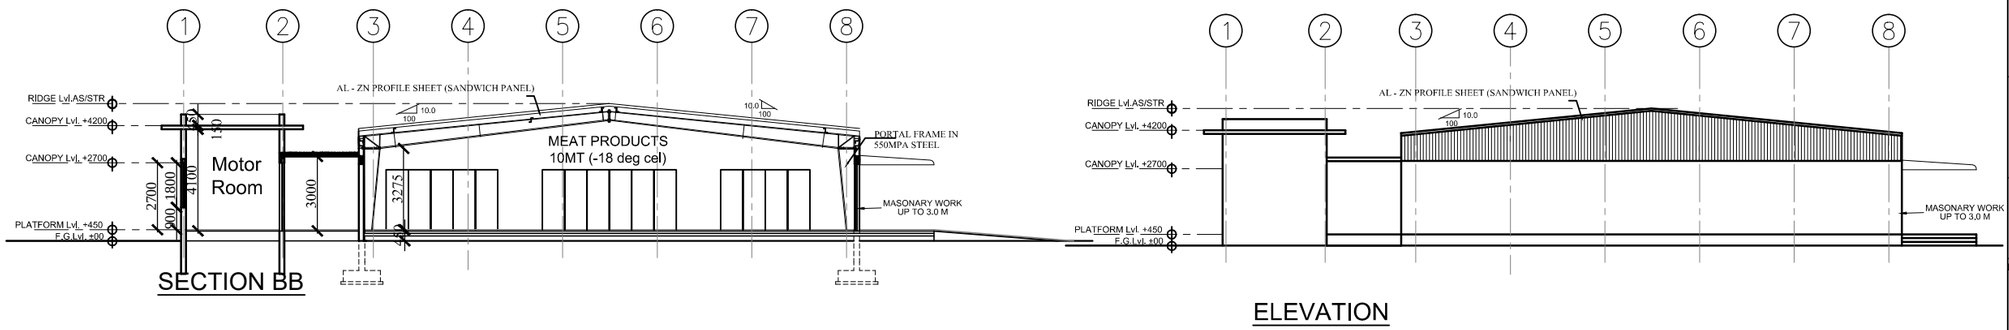

NOTES:–

1. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS NOTED OTHERWISE.
2. WRITTEN DIMENSIONS ARE TO BE FOLLOWED. DRAWINGS ARE NOT TO BE SCALED.
3. ANY DISCREPANCY IN THE DRAWING SHALL BE BROUGHT TO THE NOTICE OF THE ENGINEER.
4. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.

AREA STATEMENT

TOTAL PLINTH AREA ON GROUND FLOOR
=860.16SQM

SCHEDULE OF OPENINGS :–

S.NO	TYPE	OPENINGS	SILL	LINTEL	REMARKS
DOORS					
1	D	1200X2700	00	0	STEEL FRAMED ROLLING SHUTTER WITH GRILL
1	D1	1000X2700	00	0	STEEL FRAMED ROLLING SHUTTER WITH GRILL
WINDOWS & VENTILATORS					
1	W	2100X1800	900	2700	AL FRAMED WINDOW WITH VENTILATOR glass and wiremesh double shutter

☐ COMPLETION STAGE ☐ CONSTRUCTION STAGE

☑ TENDER STAGE ☐ DPR STAGE

SUFFIX	DATE	INITIALS	DETAILS

REVISIONS

CLIENT

MINISTRY OF EXTERNAL AFFAIRS
(GOVT. OF INDIA)

CONSULTANT

RITES
THE INFRASTRUCTURE PEOPLE
AIRPORTS DIVISION
(ISO – 9001 CERTIFIED)


JOB TITLE

MEA-2


DRAWING TITLE

REFRIGERATED SHED
PLAN, ELEVATION & SECTION


Job. No.		Drg. No. RITES/AP/MEA–2/Arch/REF.SHED /01
Scale	Date DEC.2017	Revision Suffix
DRAWN	DEALT	P.CORD. APPROVED BY

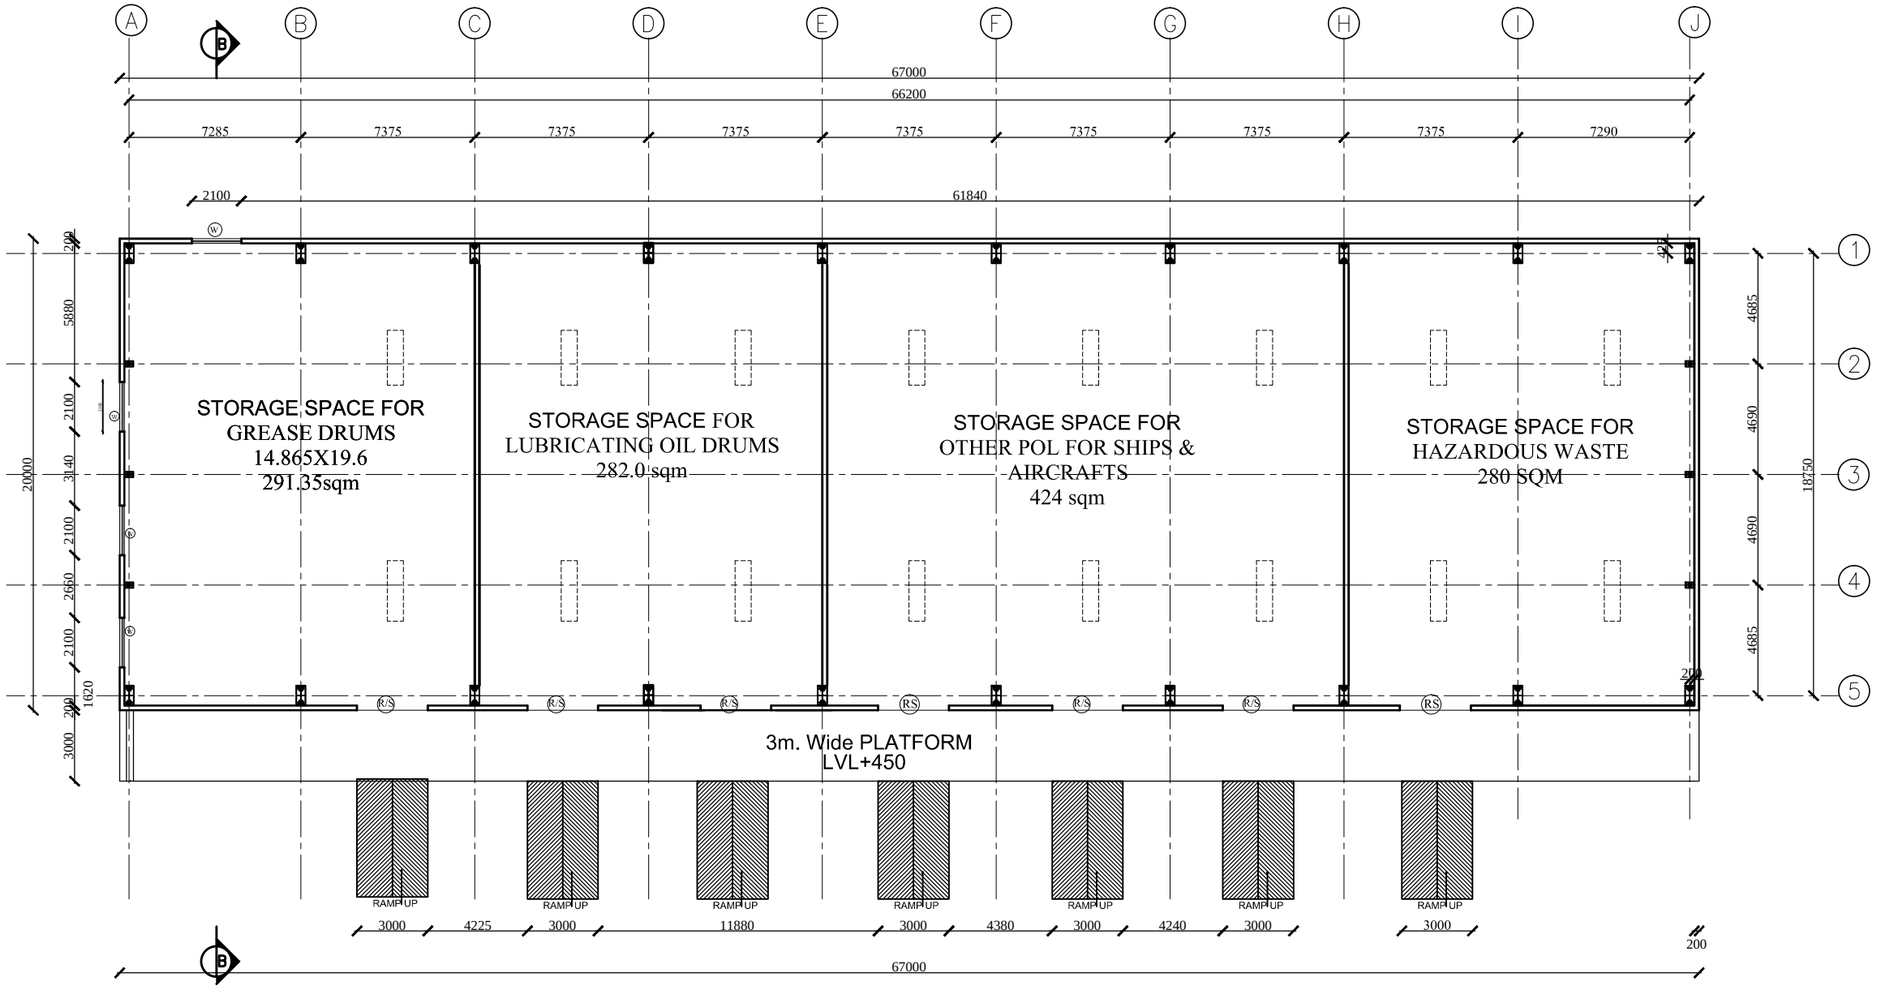


PLAN

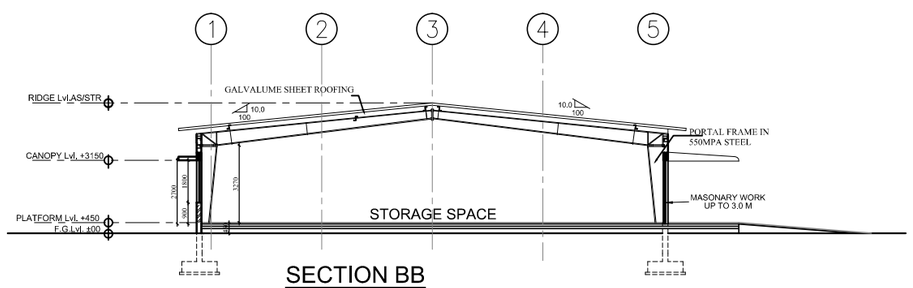

SECTION BB

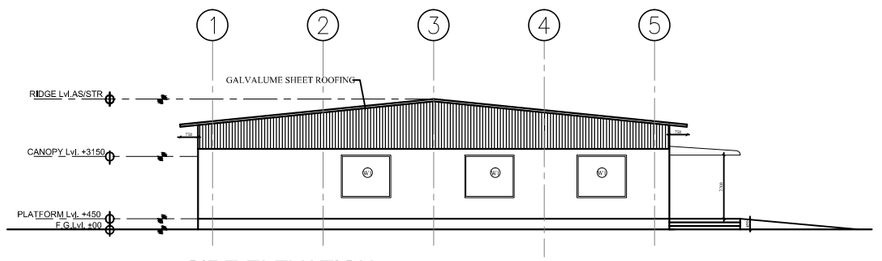

SIDE ELEVATION

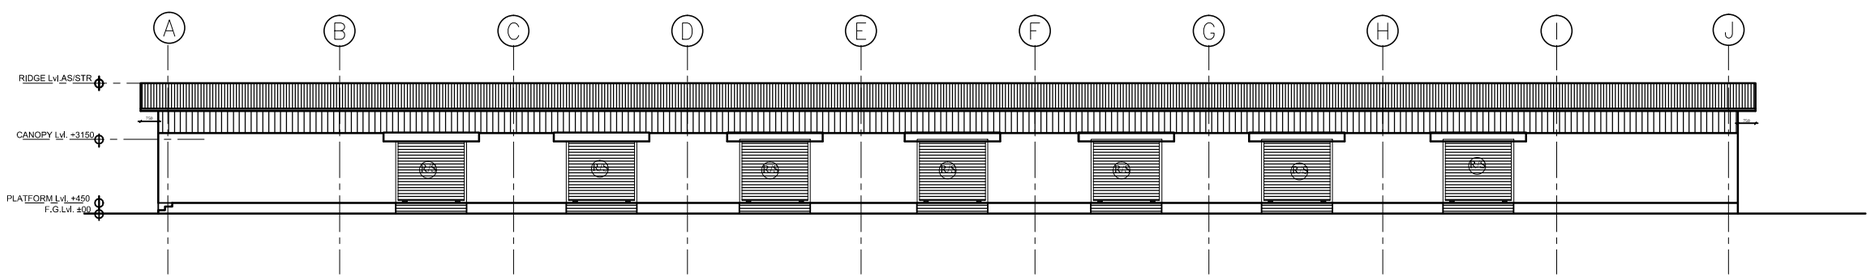

FRONT ELEVATION

NOTES:–

1. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS NOTED OTHERWISE.
2. WRITTEN DIMENSIONS ARE TO BE FOLLOWED. DRAWINGS ARE NOT TO BE SCALED.
3. ANY DISCREPANCY IN THE DRAWING SHALL BE BROUGHT TO THE NOTICE OF THE ENGINEER.
4. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.

AREA STATEMENT

TOTAL PLINTH AREA ON GROUND FLOOR
=1340.09 SQM

SCHEDULE OF OPENINGS :–

S.NO	TYPE	OPENINGS	SILL	LINTEL	REMARKS
DOORS					
1	R/S	3000X2700	00	0	STEEL FRAMED ROLLING SHUTTER WITH GRILL
WINDOWS & VENTILATORS					
1	W	2100X1800	900	2700	AL FRAMED WINDOW WITH VENTILATOR glass and wiremesh double shutter

SCHEDULE OF FINISHES

S.NO	AREA	FLOOR	INTERNAL WALL	INTERNAL/ EXPOSED COLUMNS	CEILING
1.	storage space, shed		1500 mm Kota Stone dado on walls & OBD above. Provision of ventilators with grills, horizontal louvers & wiremesh all around.		
	Wall Sheeting	PRECOATED PROFILED WALL SHEET			
	Roof Sheeting	GALVALUME SHEET CLADDING			

EXTERNAL FINISH : WEATHER PROOF EXTERIOR PAINT

☐ COMPLETION STAGE ☐ CONSTRUCTION STAGE

☑ TENDER STAGE ☐ DPR STAGE

SUFFIX	DATE	INITIALS	DETAILS

REVISIONS

CLIENT

MINISTRY OF EXTERNAL AFFAIRS
(GOVT. OF INDIA)

CONSULTANT

RITES
THE INFRASTRUCTURE PEOPLE
AIRPORTS DIVISION
(ISO – 9001 CERTIFIED)


JOB TITLE

MEA-2


DRAWING TITLE

STORAGE SHED–LUBRICANTING OIL DRUMS, GREASE DRUMS, OTHER POL FOR SHIPS AND AIRCRAFT


Job. No.		Drg. No. RITES/AP/MEA-2/Arch/STO.SHED-OIL /01
Scale	Date DEC.2017	Revision Suffix
DRAWN	DEALT	P.CORD. APPROVED BY

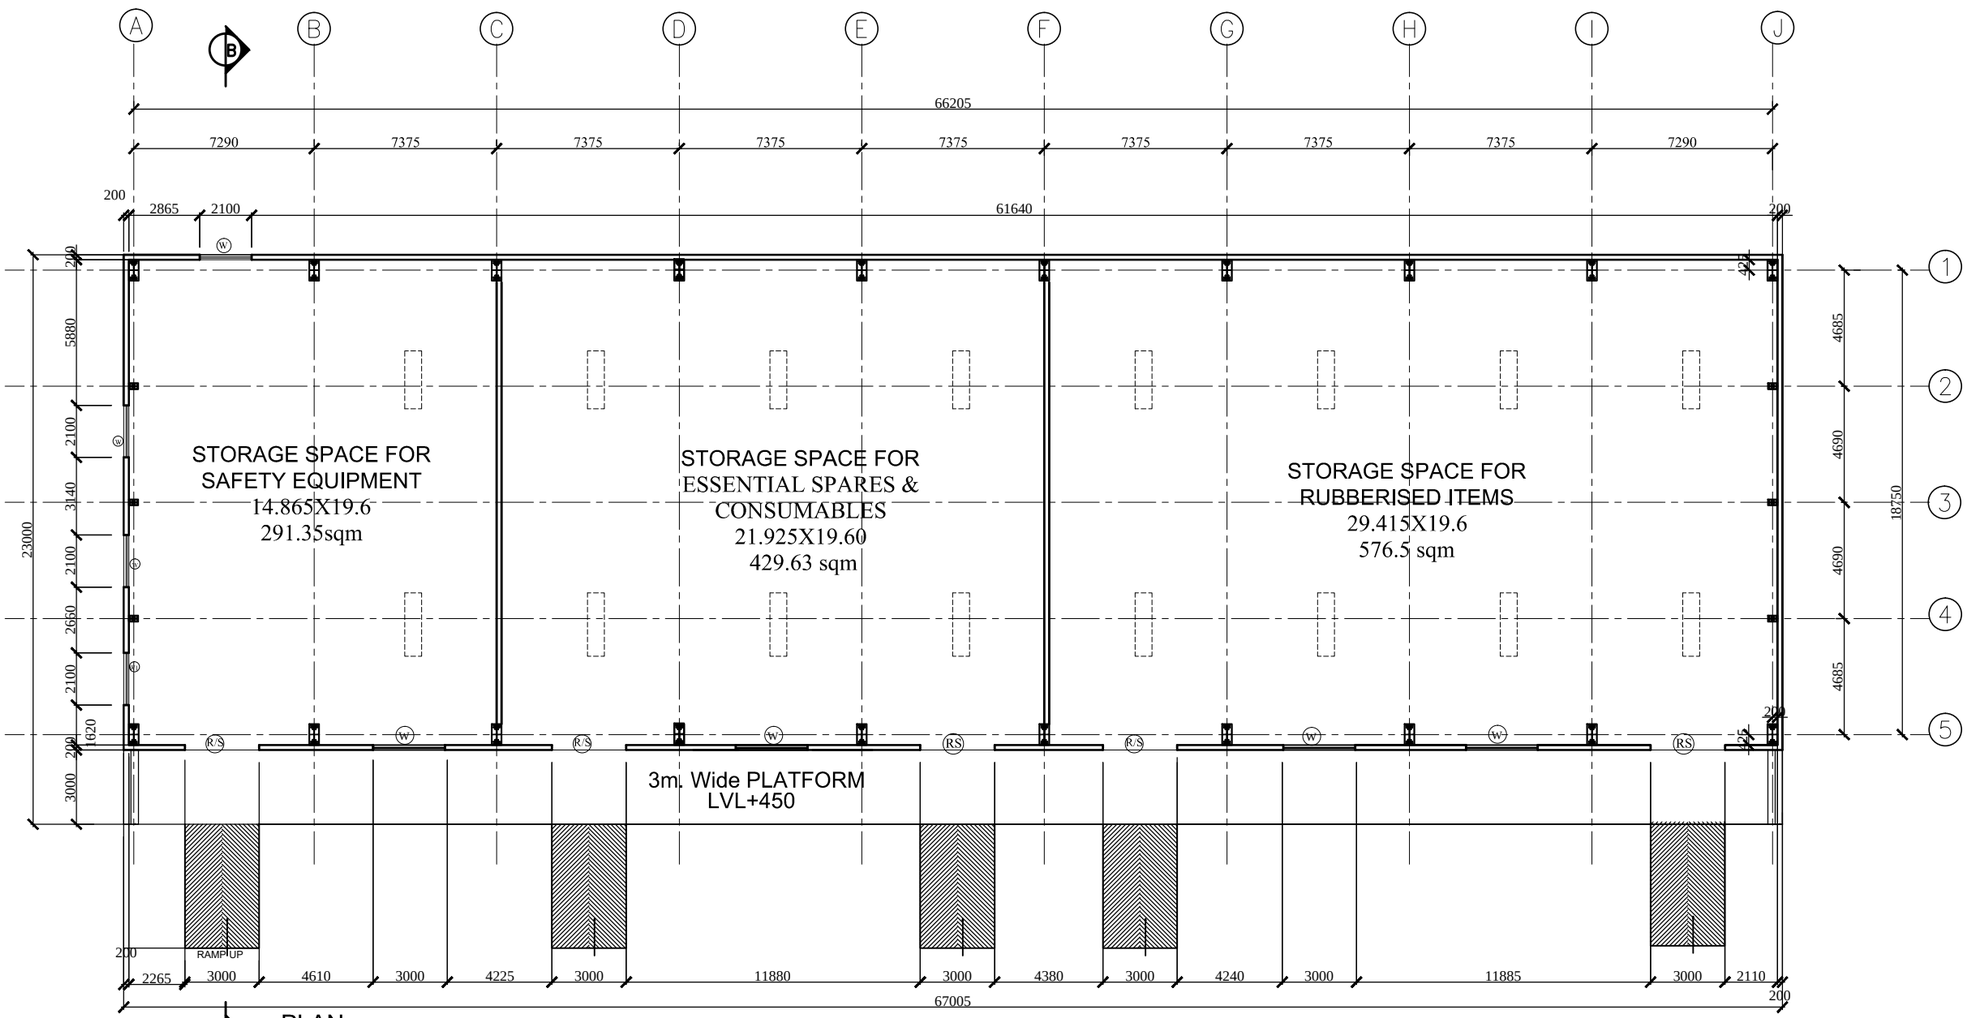


PLAN

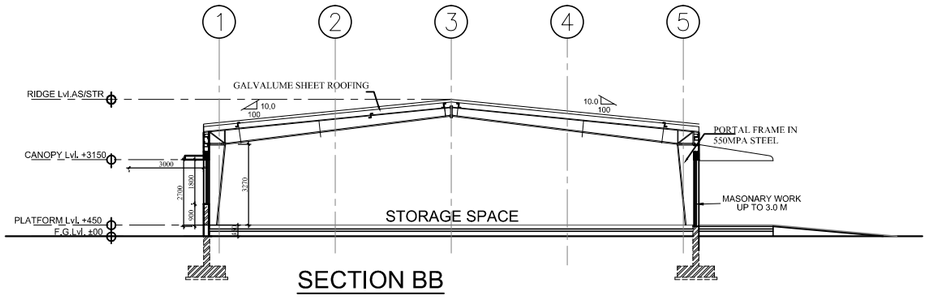

SECTION BB

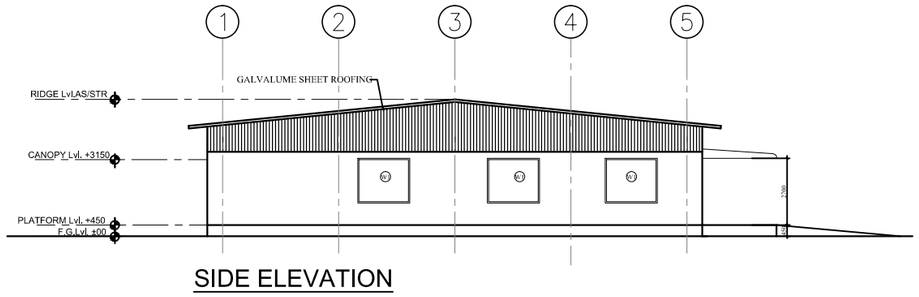

SIDE ELEVATION

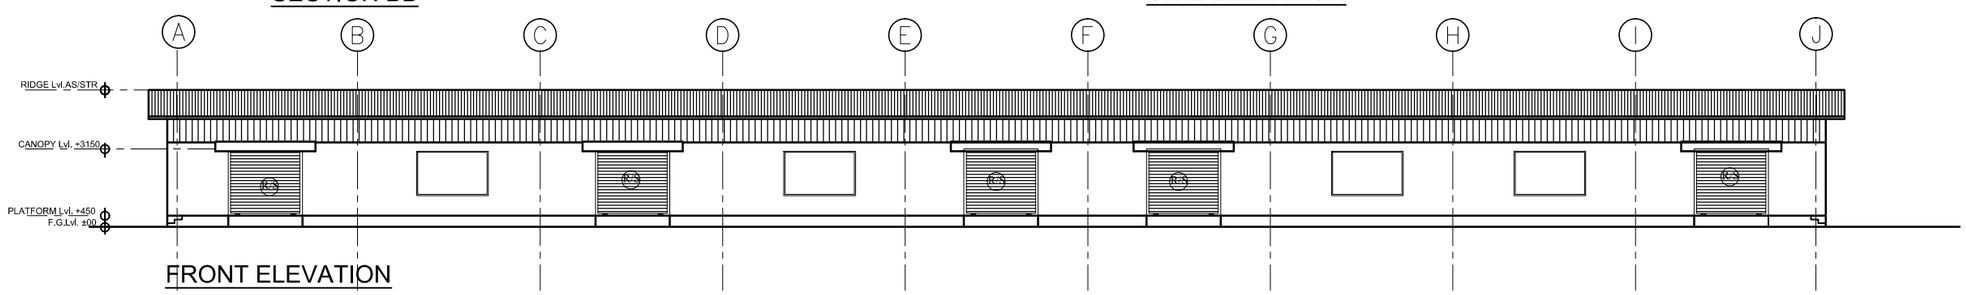

FRONT ELEVATION

NOTES:–

1. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS NOTED OTHERWISE.
2. WRITTEN DIMENSIONS ARE TO BE FOLLOWED. DRAWINGS ARE NOT TO BE SCALED.
3. ANY DISCREPANCY IN THE DRAWING SHALL BE BROUGHT TO THE NOTICE OF THE ENGINEER.
4. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH OTHER RELEVANT DRAWINGS.

AREA STATEMENT

TOTAL PLINTH AREA ON GROUND FLOOR
=1340.09 SQM

SCHEDULE OF OPENINGS :–

S.NO	TYPE	OPENINGS	SILL	LINTEL	REMARKS
DOORS					
1	R/S	3000X2700	00	0	STEEL FRAMED ROLLING SHUTTER WITH GRILL
WINDOWS & VENTILATORS					
1	W	2900X1800	900	2700	AL FRAMED WINDOW WITH1 VENTILATOR glass and wiremesh double shutter
2	W1	2100X1800	900	2700	AL FRAMED WINDOW WITH VENTILATOR glass and wiremesh double shutter

SCHEDULE OF FINISHES

S.NO	AREA	FLOOR	INTERNAL WALL	INTERNAL/ EXPOSED COLUMNS	CEILING
1.	storage space, shed		1500 mm Kota Stone dado on walls & OBD above. Provision of ventilators with grills, horizontal louvers & wiremesh all around.		
	Wall Sheeting	PRECOATED PROFILED WALL SHEET			
	Roof Sheeting	GALVALUME SHEET CLADDING			

EXTERNAL FINISH : WEATHER PROOF EXTERIOR PAINT

COMPLETION STAGE ☐ CONSTRUCTION STAGE ☐
TENDER STAGE ☑ DPR STAGE ☐

SUFFIX	DATE	INITIALS	DETAILS

REVISIONS

CLIENT

MINISTRY OF EXTERNAL AFFAIRS
(GOVT. OF INDIA)

CONSULTANT

RITES
THE INFRASTRUCTURE PEOPLE
AIRPORTS DIVISION
(ISO – 9001 CERTIFIED)

JOB TITLE

MEA-2

DRAWING TITLE

STORAGE SHED–RUBBERISED ITEMS
PLAN, SECTION, ELEVATION

Job. No.		Drg. No. RITES/AP/MEA-2/Arch/ST0.RUBB /01
Scale	Date DEC.2017	Revision Suffix
DRAWN	DEALT	P.CORD. APPROVED BY