NIHVA TECHNOLOGIES

WEIGHT ESTIMATION SHEET

CLIENT	SCH517_TD_ARCH_SITE_ENT-GATE_006-01_R0	DATE	3/14/2024
PROJECT	Motorised Sliding Gate	LOCATION	Pune
FINISH SIZE	13.9 m x 2 m	PREPARED BY	Jayesh


SR	DESC	DETAILS	MATERIAL GRADE	DIA	WIDTH	HEIGHT	THICKNESS	LENGTH	UOM	QUANTITY	WEIGHT	REMARK
1	SINGLE LEAF (15000 mm X 1950 mm)	Tube - Outer Frame-Horizontal	MS		100	100	4	15000	mm	3	543	837 Weight Of Single leaf
		Tube - Outer Frame -Vertical	MS		100	100	4	1800	mm	3	65	
		Vertical Tube type 1 - Inner	MS		50	25	3	1300	mm	71	119	
		Vertical Tube type 2 -For Cladding Sheet	MS		50	25	3	300	mm	12	14	
		MS Cladding Sheet	MS		300	25	3	1050	mm	13	96	
2	Bottom Track	En 8 Bar	En8	20				30	M	90	0	
		Holadfast 12'	MS					0.3	M	50	110	
	Post	Bracket	MS						No's	4	160	
3	Accessories	Bottom Side wheel Assembly (4 inch)	MS						No's	7	0	
		Nylon Roller with Bearing		60				150	mm	24	0	
									Weight For Required Qty	1	1107	
									Weight Including Safety Factor	1.2	1328	

Mode Of Operation = Motorised

Motor Selection = According | 1255.6 | kg

Weight As per Provided Reference Drawing

REFERENCE IMAGE

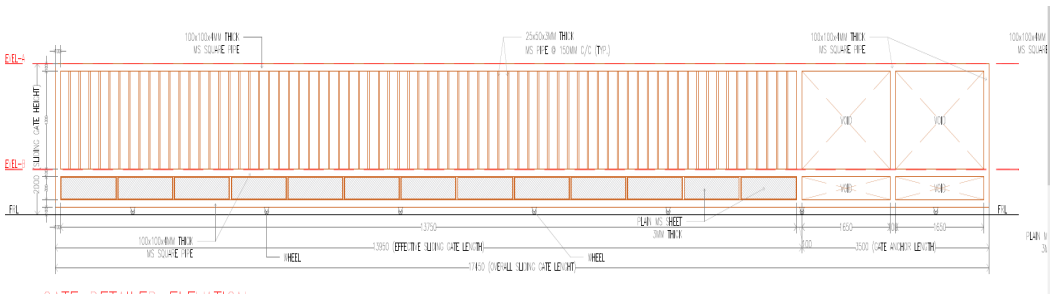


NIHVA TECHNOLOGIES			
WEIGHT ESTIMATION SHEET			
CLIENT	SCH517_TD_ARCH_SITE_ENT-GATE_006-01_R0	DATE	3/14/2024
PROJECT	Wicket Gate	LOCATION	Pune
FINISH SIZE	1.2 m x 2 m	PREPARED BY	Jayesh

SR	DESC	DETAILS	MATERIAL GRADE	DIA	WIDTH	HEIGHT	THICKNESS	LENGTH	UOM	QUANTITY	WEIGHT
1	Wicket Gate (1150 mm X 1950 mm)	Tube - Outer Frame Horizontal	MS		100	100	4	1000	mm	3	36
		Tube - Outer Frame Vertical	MS		100	100	4	1900	mm	2	46
		vertical Tube type 1 - Inner	MS		50	25	3	1300	mm	5	18
		MS Cladding Sheet	MS		300		3	1000	mm	1	7
3	Accessories	Pivot assembly	MS						Sets	2	0
		Manual Locking Provision							Sets	1	0
									Weight For Required Qty	1	107
									Weight Including Safety Factor	1.2	128

Mode Of Operation = Manual

Weight As per Provided Reference Drawing

REFERENCE IMAGE

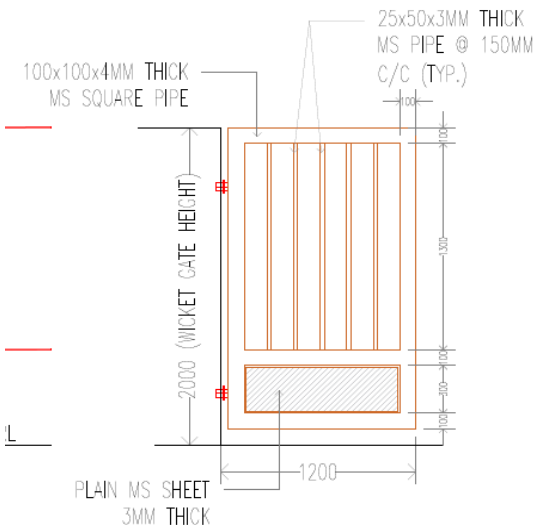

NIHVA TECHNOLOGIES

WEIGHT ESTIMATION SHEET

CLIENT	SCH517_TD_ARCH_SITE_ENT-GATE_006-02_R0	DATE	3/14/2024
PROJECT	Motorised Sliding Gate	LOCATION	Pune
FINISH SIZE	17.45 m x 2 m	PREPARED BY	Jayesh


SR	DESC	DETAILS	MATERIAL GRADE	DIA	WIDTH	HEIGHT	THICKNESS	LENGTH	UOM	QUANTITY	WEIGHT	REMARK
1	SINGLE LEAF (14500 mm X 1950 mm)	Tube - Outer Frame-Horizontal	MS		100	100	4	14500	mm	3	525	819 Weight Of Single leaf
		Tube - Outer Frame -Vertical	MS		100	100	4	1800	mm	3	65	
		Vertical Tube type 1 - Inner	MS		50	25	3	1300	mm	71	119	
		Vertical Tube type 2 -For Cladding Sheet	MS		50	25	3	300	mm	12	14	
		MS Cladding Sheet	MS		300	25	3	1050	mm	13	96	
2	Bottom Track	En 8 Bar	En8	20				30	M	90	0	
		Holadfast 12'	MS					0.3	M	48	106	
	Post	Bracket	MS						No's	4	160	
3	Accessories	Bottom Side wheel Assembly (4 inch)	MS						No's	7	0	
		Nylon Roller with Bearing		60				150	mm	24	0	
									Weight For Required Qty	1	1085	
									Weight Including Safety Factor	1.2	1302	

Mode Of Operation = Motorised

Motor Selection = According | 1228.5 | kg

Weight As per Provided Reference Drawing

REFERENCE IMAGE

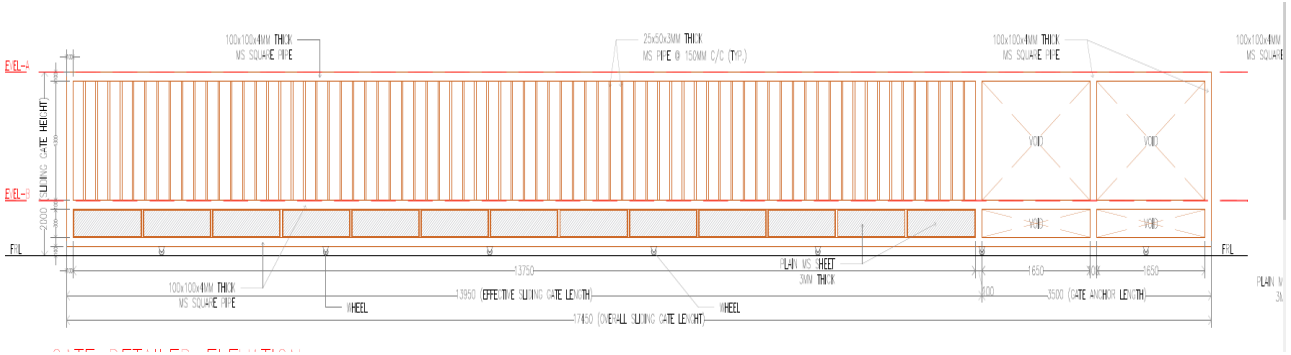

NIHVA TECHNOLOGIES

WEIGHT ESTIMATION SHEET


CLIENT	SCH517_TD_ARCH_SITE_ENT-GATE_006-01_R0	DATE	3/14/2024
PROJECT	Wicket Gate	LOCATION	Pune
FINISH SIZE	1.2 m x 2 m	PREPARED BY	Jayesh

SR	DESC	DETAILS	MATERIAL GRADE	DIA	WIDTH	HEIGHT	THICKNESS	LENGTH	UOM	QUANTITY	WEIGHT
1	Wicket Gate (1150 mm X 1950 mm)	Tube - Outer Frame Horizontal	MS		100	100	4	1000	mm	3	36
		Tube - Outer Frame Vertical	MS		100	100	4	1900	mm	2	46
		vertical Tube type 1 - Inner	MS		50	25	3	1300	mm	5	18
		MS Cladding Sheet	MS		300		3	1000	mm	1	7
3	Accessories	Pivot assembly	MS						Sets	2	0
		Manual Locking Provision							Sets	1	0
									Weight For Required Qty	1	107
									Weight Including Safety Factor	1.2	128

Mode Of Operation = Manual

Weight As per Provided Reference Drawing

REFERENCE IMAGE

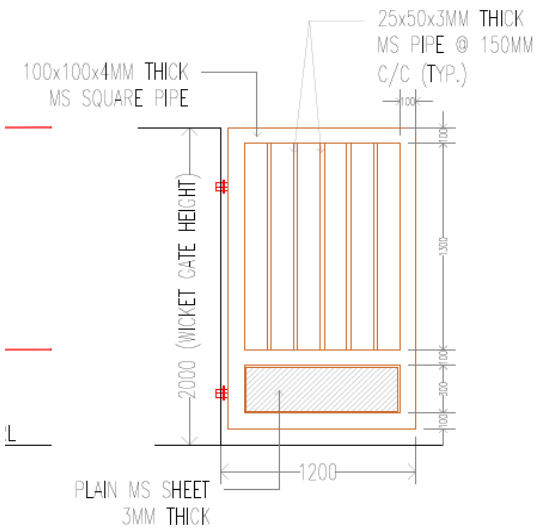

NIHVA TECHNOLOGIES

WEIGHT ESTIMATION SHEET

CLIENT	SCH517_TD_ARCH_SITE_ENT-GATE_006-03_R0	DATE	3/14/2024
PROJECT	Motorised Sliding Gate	LOCATION	Pune
FINISH SIZE	7.95 m x 2 m	PREPARED BY	Jayesh

SR	DESC	DETAILS	MATERIAL GRADE	DIA	WIDTH	HEIGHT	THICKNESS	LENGTH	UOM	QUANTITY	WEIGHT	REMARK
1	SINGLE LEAF (9300 mm X 1950 mm)	Tube - Outer Frame-Horizontal	MS		100	100	4	9300	mm	3	336	557 Weight Of Single leaf
		Tube - Outer Frame -Vertical	MS		100	100	4	1800	mm	3	65	
		Vertical Tube type 1 - Inner	MS		50	25	3	1300	mm	38	68	
		Vertical Tube type 2 -For Cladding Sheet	MS		50	25	3	300	mm	9	13	
		MS Cladding Sheet	MS		300	25	3	1050	mm	10	74	
2	Bottom Track	En 8 Bar	En8	20				18	M	54	0	
		Holadfast 12'	MS					0.3	M	31	68	
	Post	Bracket	MS						No's	4	160	
3	Accessories	Bottom Side wheel Assembly (4 inch)	MS						No's	5	0	
		Nylon Roller with Bearing		60				150	mm	24	0	
									Weight For Required Qty	1	785	
									Weight Including Safety Factor	1.2	942	

Mode Of Operation = Motorised

Motor Selection = According | 835.6 | kg

Weight As per Provided Reference Drawing

REFERENCE IMAGE

NIHVA TECHNOLOGIES

WEIGHT ESTIMATION SHEET

CLIENT	SCH517_TD_ARCH_SITE_ENT-GATE_006-04_R0	DATE	3/14/2024
PROJECT	Motorised Sliding Gate	LOCATION	Pune
FINISH SIZE	8.45m x 2 m	PREPARED BY	Jayesh

SR	DESC	DETAILS	MATERIAL GRADE	DIA	WIDTH	HEIGHT	THICKNESS	LENGTH	UOM	QUANTITY	WEIGHT	REMARK
1	SINGLE LEAF (9800 mm X 1950 mm)	Tube - Outer Frame-Horizontal	MS		100	100	4	9800	mm	3	354	575 Weight Of Single leaf
		Tube - Outer Frame -Vertical	MS		100	100	4	1800	mm	3	65	
		Vertical Tube type 1 - Inner	MS		50	25	3	1300	mm	38	68	
		Vertical Tube type 2 -For Cladding Sheet	MS		50	25	3	300	mm	9	13	
		MS Cladding Sheet	MS		300	25	3	1050	mm	10	74	
2	Bottom Track	En 8 Bar	En8	20				18	M	54	0	
		Holadfast 12'	MS					0.3	M	32.66666667	72	
	Post	Bracket	MS						No's	4	160	
3	Accessories	Bottom Side wheel Assembly (4 inch)	MS						No's	4	0	
		Nylon Roller with Bearing		60				150	mm	24	0	
									Weight For Required Qty	1	807	
									Weight Including Safety Factor	1.2	968	

Mode Of Operation = Motorised

Motor Selection = According | 862.7 | kg

Weight As per Provided Reference Drawing

REFERENCE IMAGE

Sr	Referece File	Segment	QTY	Clear Opening		Considered in Client Dwg		Considered For Nihva	Actual Weight	Actual Weight with F.O.S. (1.2)
				Width	Height	Width	Height	Width		
1	SCH517_TD_ARCH_SITE_ENT-GATE_006-01_R0	Sliding Gate	1	13950	2000	17450	1900	15000	1107	1328
		Wicket Gate	1	1200	2000	1150	1900	same	107	128
2	SCH517_TD_ARCH_SITE_ENT-GATE_006-02_R0	Sliding Gate	1	13500	2000	17450	1900	14500	1085	1302
		Wicket Gate	1	1200	2000	1150	1900	same	107	128
3	SCH517_TD_ARCH_SITE_ENT-GATE_006-03_R0	Sliding Gate	1	7950	2000	10450	1900	9300	785	942
4	SCH517_TD_ARCH_SITE_ENT-GATE_006-03_R0	Manual Sliding Gate	1	8450	2000	10950	1900	9800	807	968
Total			6						3998	4798