NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2008 Certified Company

GST Pune : 27AAECN0437H1ZM

NIHVA Sales Quotation

Schreiber Dynamix dairies Pvt.Ltd
Baramati

Date : 24.12.2020
Quote NO : SQT.20.21.2909
Kind Attn : Mr. Virendra Gaikwad
Email Id : Virendra.Gaikwad@schreiberfoods.com
Contact No : 9158894809

Project Name & Location: Baramati

Subject : Quotation for Sectional Door, Dock Leveler, Dock Shelter

Dear Sir,

Thank you for your opportunity and trust shown on "NIHVA" your preferred partner for innovative solutions.
This has reference to your above mentioned requirement, please find below our Solutions.

Sr. No	Description	Pages
A.	Commercial Offer	1
B.	Technical Specification	2
C.	General Conditions	3
D.	Terms & Condtions	4

A) Commercial Offer

Sr No	Description	Size		Qty	Supply Charges in INR		Installation Charges in INR	
		Clear Width (mm)	Clear Height (mm)	(Nos)	Unit Price	Total Amount	Unit Price	Total Amount
1	**Assa Abloy (Sweden) Make Dock Leveller (Capacity 9 Ton)**	2000	2500	1	486,000	486,000	20,000	20,000
2	**Assa Abloy Sweden make Overhead Sectional Door**	2400	2500	1	320,000	320,000	20,000	20,000
3	**Assa Abloy Sweden make Retractable Dock Shelter**	3400	3500	1	140,000	140,000	20,000	20,000
				Total		**946,000**		**60,000**
6	P&F Charges			3%		**28,380**		
	Total Without Taxes					**974,380**		**60,000**
	GST Extra @ 18%			18%		175,388		10,800
	Total With Taxes					**1,149,768**		**70,800**
7	Transportation Charges					**Extra at Actual**		
8	Unloading Charges @ Site					**In Client Scope**		

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019


An ISO 9001:2008 Certified Company

GST Pune : 27AAECN0437H1ZM

B) Technical Specification

ASSA Abloy - Crawford Make Dock Leveller



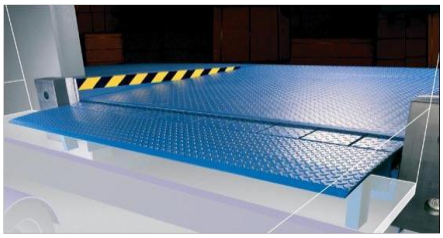

1	Size : (W) x (L)	2000 mm x 2500 mm
2	Load Capacity	9 Ton
3	Lip Length	Swing lip 500mm
4	Leveller Height	700 mm
5	Colour	RAL 5010
6	Class	Paint Class 80
7	Tear Plate Thickness	Tear plate 8mm
8	Lip Material	Steel
9	Control Box	950 LA
10	European Standard	EN 1398 Dock levellers
11	Nominal Motor Power	0.75kw
12	Control unit Protection Classs	IP 54
13	Magnetic valves	24 V/DC 18W S1

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault
Showroom, Thermax chowk, MIDC,
Chinchwad.

An ISO 9001:2008 Certified Company

GST Pune : 27AAECN0437H1ZM

NIHVA ASSA ABLOY Sectional Door





Sr. No	Description	Specifications
1	**Model No**	OH1042P
2	**Opening Direction & Mounting**	High Lift
3	**Door produced Based on which certification**	Doors produced according to ISO 9000 or ISO 14000 certified.
4	**Opening/Closing Speed**	0,28 m/s
5	**Door Material**	GI Steel
6	**Panel Thickness**	44 mm
7	**Door sealent**	All door sealants made of EPDM rubber, temperature resistant -30/+70
8	**Water Penetration**	EN 12425 class 3
9	**Air Permealibity**	EN12426 class 3
10	**Wind Load**	EN21424 class 3
11	**Thermal Transittance**	6 W/m2K
12	**Bottom sealing**	Bottom of the door to be equiped with three lip sealing made of oil resistant EPDM rubber
13	**Emergency Operation**	Single phase 230V direct drive on shaft
14	**Operating Switch**	by Disengagement rope manual
15	**Environmental Green Product DeclarationCertification**	Up/Down Keypad + stopbutton
16	**Drive Unit & Mounting Type**	As per ISO 14025 and EN 15804
17	**Door Safety**	Doors equiped with spring break device; Safety Photo cell, bottom safety edge, rope break mechan

Retractable Dock Shelter

Sr. No	Description	Specifications
1	**Size**	(W) 3400 mm x (H) 3500 mm
2	**Top Curtain**	1000 mm
3	**Side Curtain**	600 mm
4	**Curtain colour**	Black
5	**Parking Guides**	White, Yellow
6	**Wall Fixings**	Concrete, Sandwich light Concrete, Load house cavity, insulated panel
7	**Top & Side Curtaiins**	Double Layer High Quality Polyester
8	**Thickness**	3.0 mm
9	**Weight**	Approx 3400 g/m2

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault
Showroom, Thermax chowk, MIDC,
Chinchwad.

C) General Conditions

1 Installation will start after receiving of Site Readyness Photographs or written Email communication.

2 We will mobilize the Installation Team in 3 - 4 working days, after reciept of Site Readyness Confirmation

3 For any reason if we need to stop our Installation and demobilize the Team without completing the Work, then extra cost will be applicable for Remobilizing the Team.

4 If Lifting Equipements are in NIHVA Scope, then those will be used for Installation purpose only and not for any other works.

Note: Please find below List which are in Client Scope

Sr. No	Description	Remark
1	Secured and fully covered Store area to keep the material	
2	Scaffolding/Hydra/Crane/Forklift etc - Required for Installation at Site	
3	Electrical Supply on the site single phase/three phase points at different places.	
4	Any civil / masonry/structural work required	
5	All structure support required	
6	In Case of any changes in the layout as per site requirements after the shipment of material , the additional quantities and the wastage.	
7	Conduits, Cables required	
8	Steel structure for Dock House & Sectional Door	

D) Terms & Conditions

Price : Ex Works Pune

Delivery : 4 - 5 weeks for Dock Shelter and Overhead Sectional Door; 12-14 weeks for Dock Leveller from the date of receipt of confirmed purchase order, Advance Payment & Drawing approval.

Payment : 80% Advance along with Confirmed Purchase Order & Balance before dispatch.

Validity : Validity of Offer is 15 days from the date of quotation

Warranty : 12 months from the date of supply.

For any further Clarification /Information in this Concern, Please feel free to Contact **Mr.Shrikant Mirkute on 8551098333**

With Best Regards
Smita Khare
9637991333
For NIHVA Technologies Pvt Ltd