

DOCK LEVELER SIZE	WIDTH (W)	LENGTH (L)	HEIGHT (H)	LIP (C) LENGTH	BUFFER SIZE (OPTIONAL)
	2025	2250	480	400	200X300X100

PIT DIMENSION	WIDTH (W 1)	LENGTH (L 1)	DEPTH (D)	ALL DIMENSIONS ARE IN mm
	2050	2250	485	

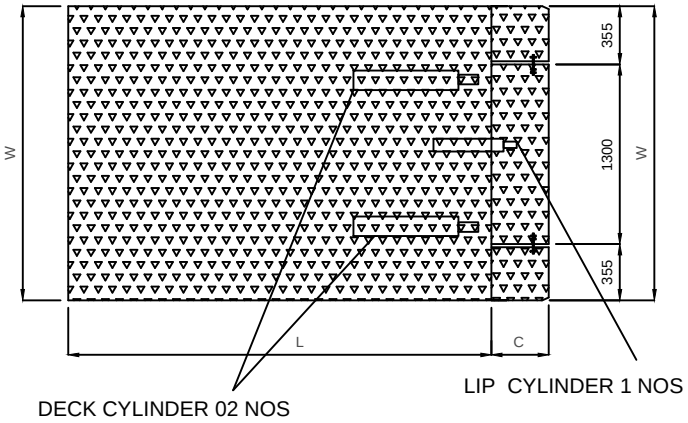



DECK CYLINDER 02 NOS


LIP CYLINDER 1 NOS

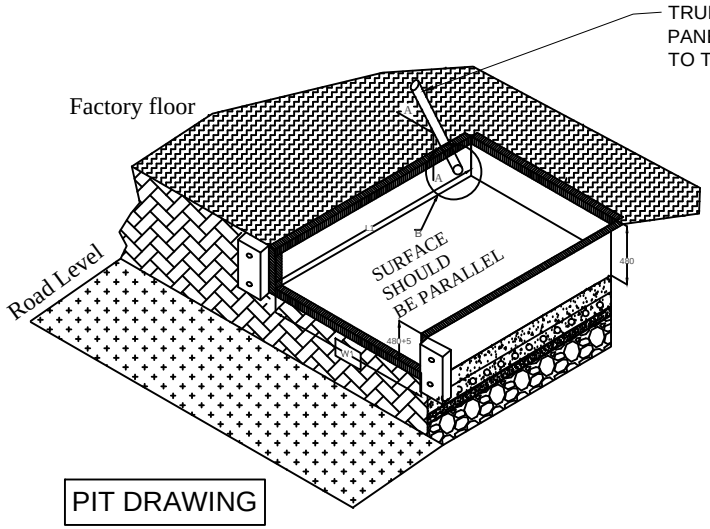

PIT DRAWING

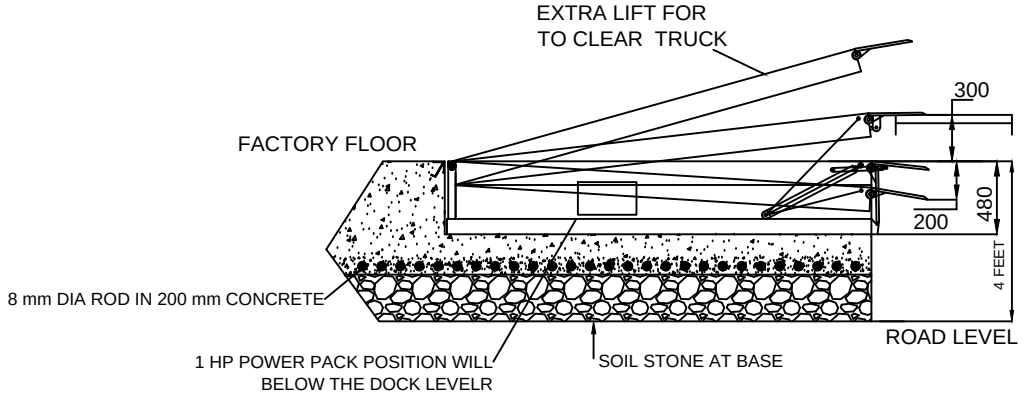



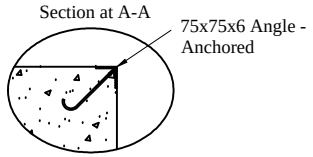

NOTE: -

1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY CABLE LENGTH STD. 5000 MM)
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 12000 KGB FLOOR LOADING
4. MOUNTING ARRANGEMENT FOR BUMPERS SHOULD BE MADE AS PER BUMPER DRAWING (IF ORDERED)
5. FABRICATION TOLERANCE FOR PLATFROM SIZE WILL BE + 10 MM

DOCK LEVELER- 06 TON CAPACITY - 01 NO

IMP NOTE: -

1.PLEASE NOTE THAT THE CAPACITY OF DOCK LEVELER CONSIDERED IS THE CAPACITY AFTER THE LIP IS RESTED ON THE VEHICLE.

2.CYLINDERS PROVIDED ARE INTENDENT TO BE USED ONLY FOR LIFTING OF BARE DOCK & CAN NOT LIFT OTHER LOADS.

TOLERANCE :- ± 10mm

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE

DOCK LEVELER - 6MT

	NAME	SIGN	DATE
DRAWN	SURAJ		30.08.2018
CHECK	P.A		30.08.2018
APPRD.	R.D		30.08.2018

If any queries contact : design@nihva.com

ALL DIMENSION ARE IN mm

NIHVA TECHNOLOGIES PVT. LTD.
Website:- www.nihva.com

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com

CLIENT -

PROJECT -

SITE LOCATION -

DWG. NO. : NIHVA/18-19/0119 | REV- 00

SCALE: NTS | WT: | SHEET: 01 OF 01