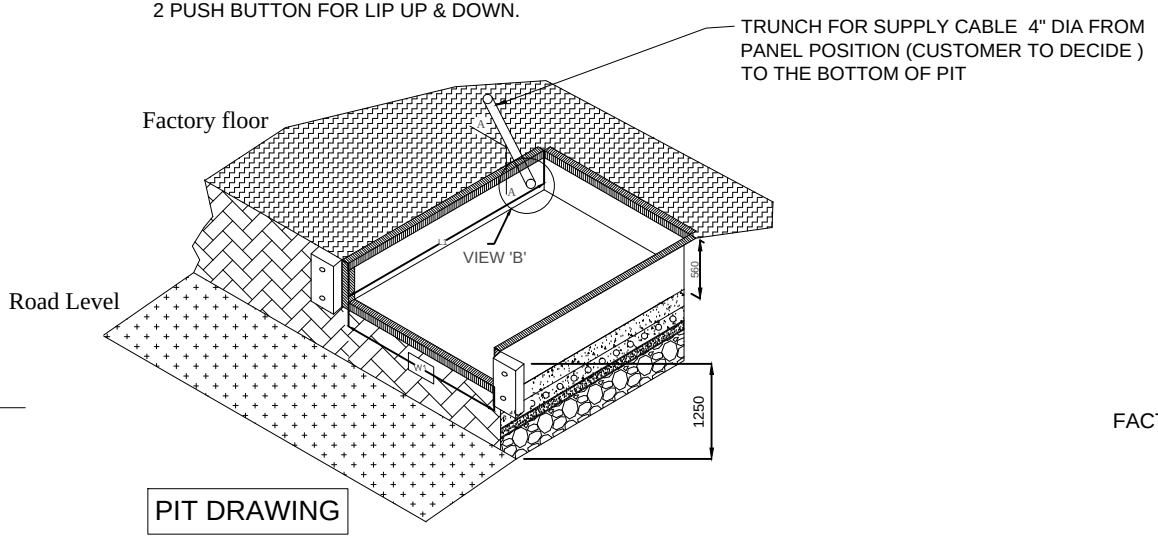
| DOCK LEVELER SIZE | WIDTH (W) | LENGTH ( L) | HEIGHT (H) | LIP (C) LENGTH | BUMPERS SIZE (OPTIONAL) |
|---|---|---|---|---|---|
| | 2000 | 2500 | 550 | 400 | 200X300X100 |

| PIT DIMENSION | WIDTH (W 1) | LENGTH ( L 1) | DEPTH (D) | ALL DIMENSIONS ARE IN mm |
|---|---|---|---|---|
| | 2050 | 2550 | 560 | |

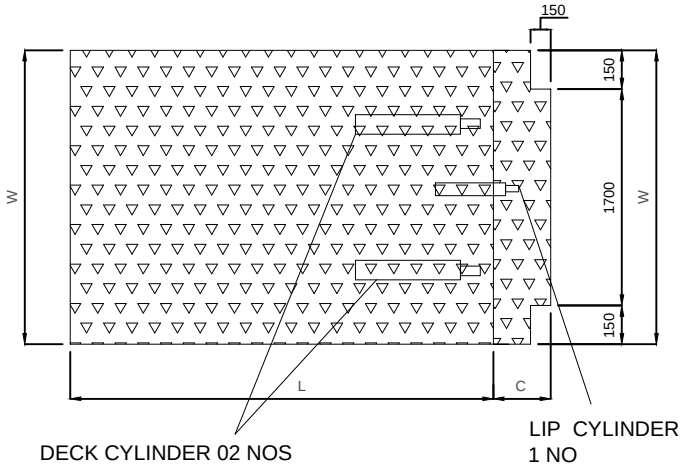
## CAPACITY - 06 TON OR 09 TON OR 15 TON ( QTY - 01 NO )

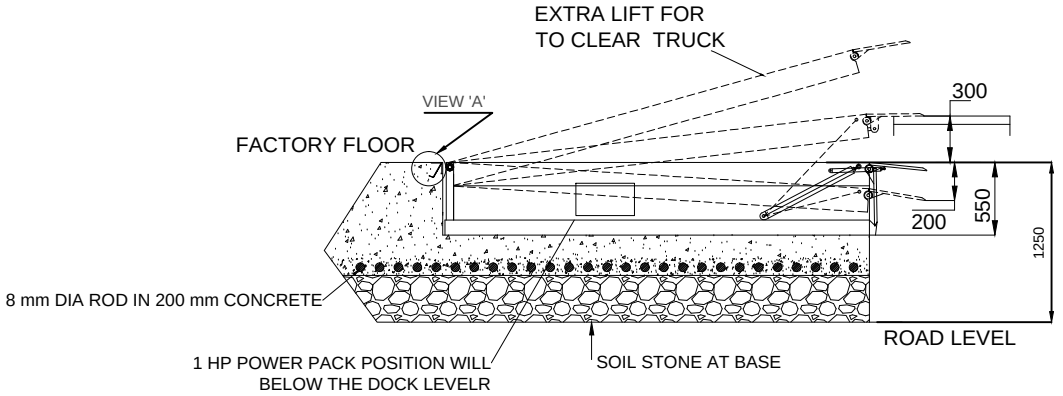
NOTE : INTERNAL DESIGN WILL BE CHANGE AS PER CAPACITY FINALIZED.


CONTROLS : 2 PUSH BUTTONS FOR DECK UP & DOWN.
2 PUSH BUTTON FOR LIP UP & DOWN.

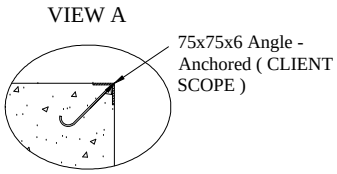



PIT DRAWING




# DOCK LEVELER-

IMP NOTE: -

1.CAPACITY : 06 TON OR 09 TON OR 15 TON ( QTY - 01 NO )
2.PLEASE NOTE THAT THE CAPACITY OF DOCK LEVELER CONSIDERED IS THE CAPACITY AFTER THE LIP IS RESTED ON THE VEHICLE.
3.CYLINDERS PROVIDED ARE INTENDENT TO BE USED ONLY FOR LIFTING OF BARE DOCK & CAN NOT LIFT OTHER LOADS.
4.PROPER DRAINAGE SHOULD BE DONE.
5.TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY CABLE LENGTH STD. 7000 MM).
6.LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 12000 KGB FLOOR LOADING.
7.MOUNTING ARRANGEMENT FOR BUMPERS SHOULD BE MADE AS PER BUMPER DRAWING (IF ORDERED).
8.FABRICATION TOLERANCE WILL BE +/- 10 MM.
9.ALL CIVIL WORK WILL BE IN CLIENT SCOPE.

TOLERANCE :- ± 10mm

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

| TITLE: DOCK LEVELER | | | | NIHVA TECHNOLOGIES PVT. LTD. PUNE |
|---|---|---|---|---|
| | NAME | SIGN | DATE | NIHVA TECHNOLOGIES PVT. LTD. Website:- www.nihva.com Tel : 020 66304033 Email:- info@nihva.com |
| DRAWN | P.A | | 14.02.19 | CLIENT - ARYAN AUTOMATION |
| CHECK | V.T | | 14.02.19 | PROJECT - |
| APPRD. | | | | SITE LOCATION - PUNE |
| If any queries contact : design@nihva.com | | | | DWG. NO. : NIHVA/18-19/0272 REV- 00 |
| ALL DIMENSION ARE IN mm | | | | SCALE: NTS WT: SHEET: 01 OF 01 |