
DOCK LEVELER SIZE	WIDTH (W)	LENGTH (L)	HEIGHT (H)	LIP (C) LENGTH
	2500	3000	560	400


PIT DIMENSION	WIDTH (W 1)	LENGTH (L 1)	DEPTH (D)	ALL DIMENSIONS ARE IN mm
	2525	3025	565	

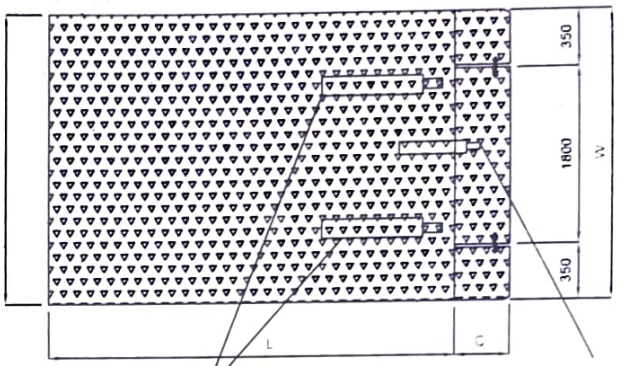


DECK CYLINDER 02 NOS

LIP CYLINDER 1 NOS

TRUNCH FOR SUPPLY CABLE 4" DIA FROM PANEL POSITION (CUSTOMER TO DECIDE) TO THE BOTH SIDE BOTTOM OF PIT.

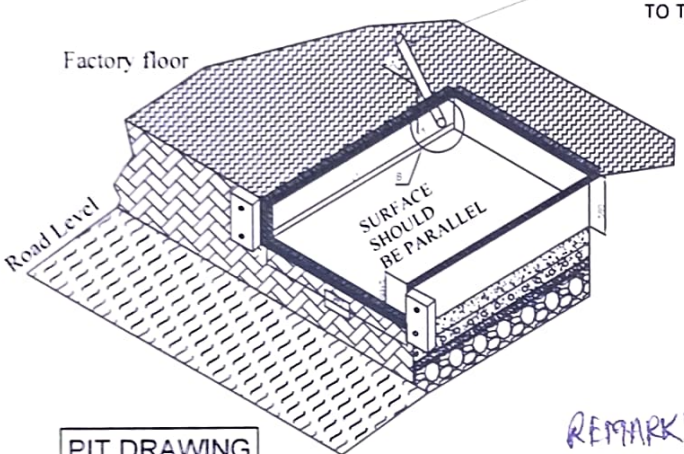


PIT DRAWING

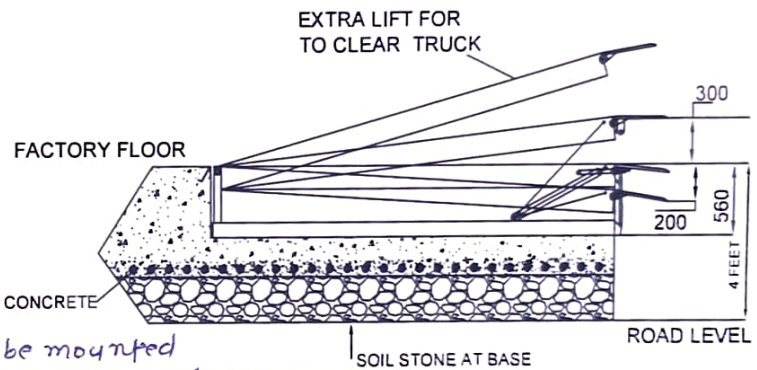


REMARK:>
1) Hydropack and panel should be mounted seperately near the dock leveller (not below the dock)
2) Standard RAL 1004 with the black strips.

Motor - 1 H.P & Control Panel should be flame proof.

DOCK LEVELER- 09 TON CAPACITY - 01 NO





NOTE: -

1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY CABLE LENGTH STD. 5000 MM)
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 12000 KGB FLOOR LOADING
4. MOUNTING ARRANGEMENT FOR BUMPERS SHOULD BE MADE AS PER BUMPER DRAWING (IF ORDERED)
5. FABRICATION TOLERANCE FOR PLATFROM SIZE WILL BE + 20 MM

IMP NOTE: -

1.PLEASE NOTE THAT THE CAPACITY OF DOCK LEVELER CONSIDERED IS THE CAPACITY AFTER THE LIP IS RESTED ON THE VEHICLE.

2.CYLINDERS PROVIDED ARE INTENDENT TO BE USED ONLY FOR LIFTING OF BARE DOCK & CAN NOT LIFT OTHER LOADS.

3.HYDROPACK AND PANEL SHOULD BE MOUNTED SEPARATELY NEAR THE DOCKLEVELLER (NOT BELOW)

Monica 7/2/22

AEGIS INFRASOLUTIONS(INDIA) PVT. LTD. Reg. No 223622 Navi Mumbai

TOLERANCE :- ± 20mm

TITLE	DOCK LEVELER - 9MT			NIHVA TECHNOLOGIES PVT. LTD. PUNE
	NAME	DATE	SIGN	NIHVA TECHNOLOGIES PVT. LTD. Website - www.nihva.com Tel 020 66304033 Email.- info@nihva.com
DRAWN	Sujata	04.02.2022		CLIENT -AEGIS INFRASOLUTIONS (INDIA) PVT LTD
CHECK	A.K	04.02.2022		PROJECT -DOCK LEVELER
APPRD.	V.T	04.02.2022		SITE LOCATION -
If any queries contact : design@nihva.com				DWG. NO. : NIHVA/22-23/CLT/0180 REV- R00
ALL DIMENSION ARE IN mm				SCALE: NTS WT: SHEET: 01 OF 01