NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

PROJECT PROPOSAL

NIHVA TECHNOLOGIES PVT. LTD.


187, G-Block, Thermax chowk, Above Renault Showroom, MIDC
Chinchwad, Pune – 411019.


Customer Name	L & T TECHNOLOGY SERVICES LIMITED
Office Address	3rd Floor, Block – 3, Dlf It Park, Mount Poonamalle Road, Ramapuram
Project Location	Chennai
Contact Person Name	Mr. Ragupathi.m
Email Id	Ragupathi.M@LntTechservices.com
Contact Number	96 8896 6960

Contact Person: Mr. Mayur Derle
Mob No.: 7709209333
Email id: automation@nihva.com
Web: http://www.nihva.com


AUTOMATION SOLUTION-DIVISION


Title: Portable Telescopic Conveyor with Counting System

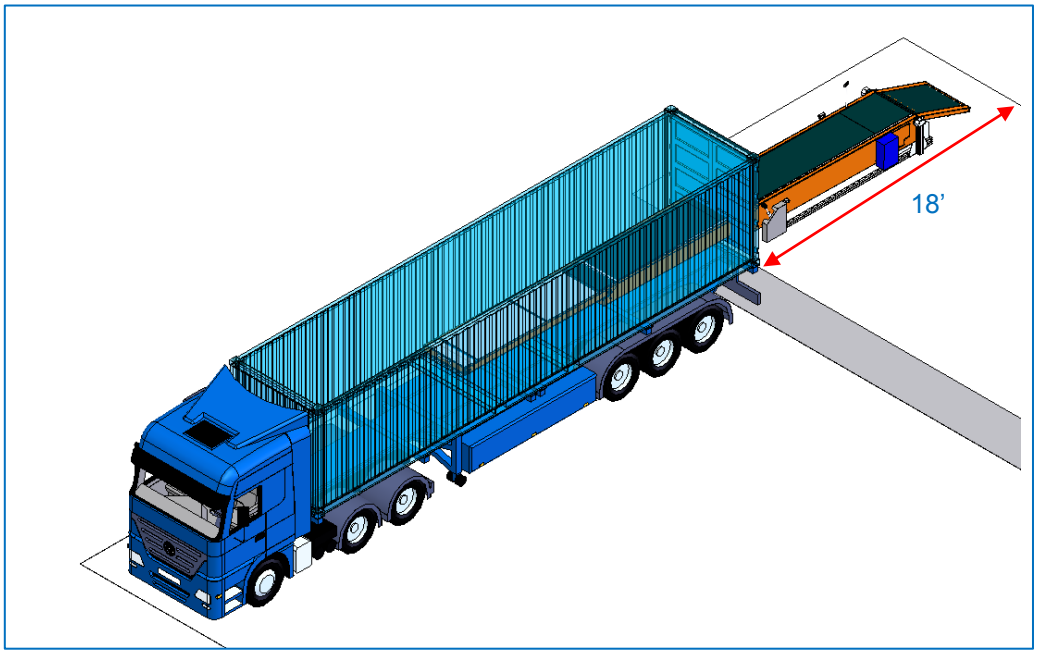

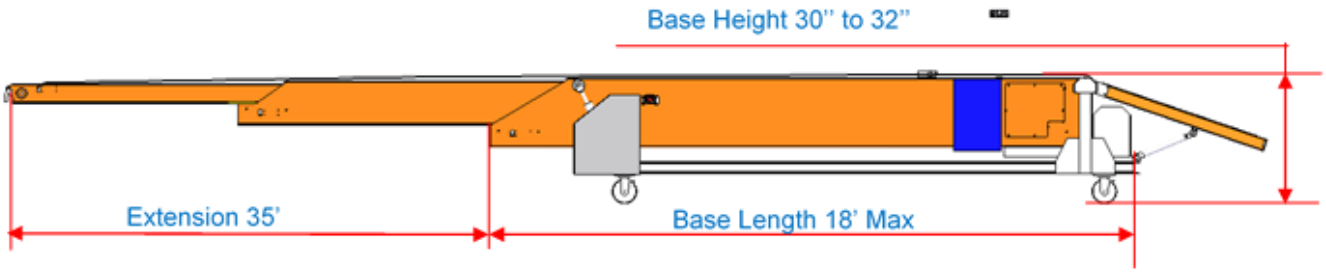

L & T Layout :

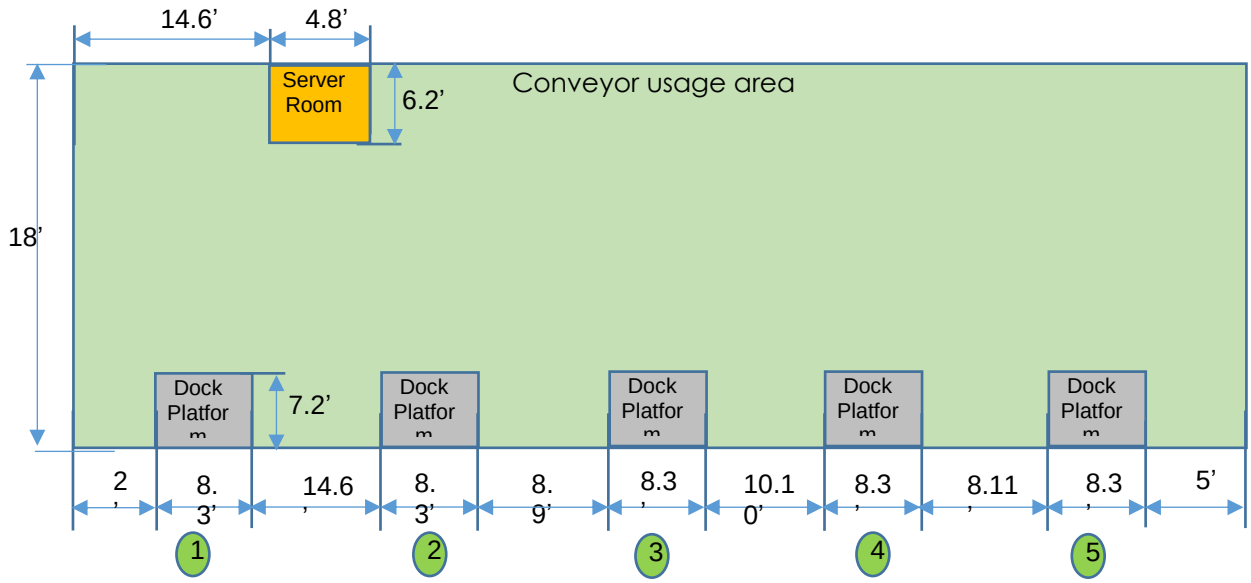

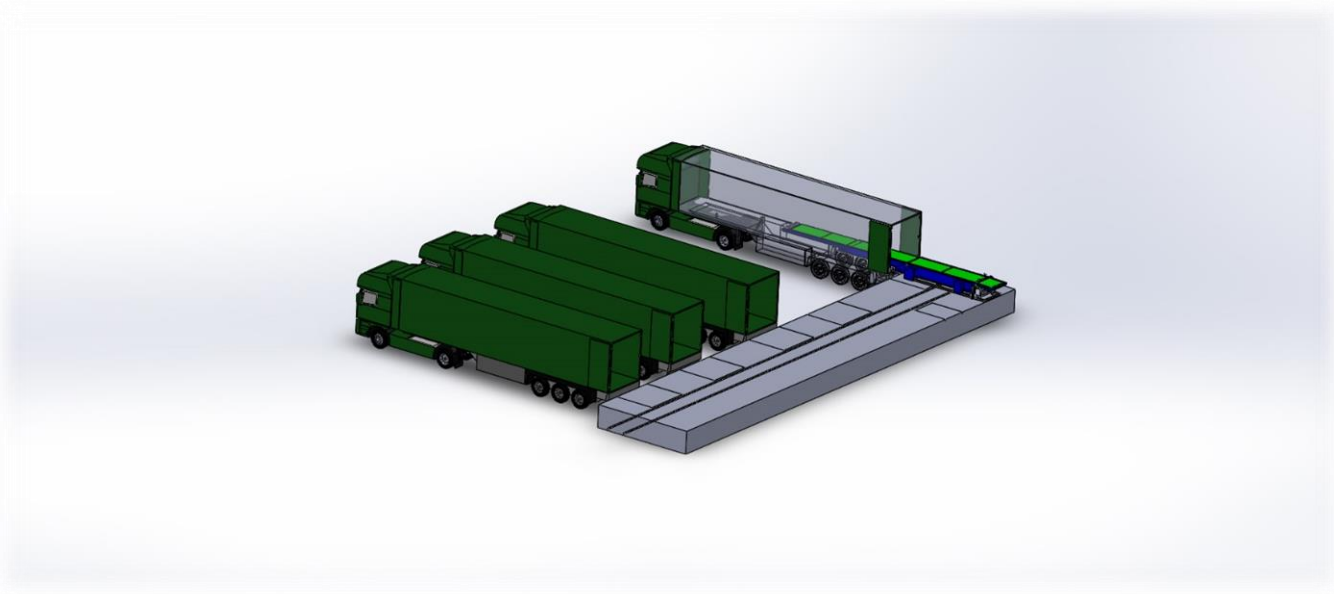

Telescopic conveyor arrangement as per above Layout

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

Date: 18/12/2017

Dear Sir,

Thank you for giving us an opportunity to participate with our offer on the above project. We enclose here with our proposal includes:

1.SCOPE OF SUPPLY

A. Telescopic Conveyor

- Extended Length: 35 Feet
- No of Section: 4
- Base Length(Retract):18 feet Maximum
- Belt Width: 1000mm
- Conveyor Height: 30 inches
- Unloading Height: 30 inches
- Loading Height: 10 Inches to 48 inches
- Adjustable up/down in loading & unloading by: Hydraulic
- Extension & retraction by: Motorized
- Movement of conveyor: One dock to another dock with less efforts.

B. Part Count sensor with Display

- Sensor will count the number of bags loaded to truck from bay area and display it on the display system.

- Display Unit will be at visible & legible position for loading person.
- Inbuilt reset option.
- Sensor will detect and count Overlap Bags and box.
- Sensors & Display will be suitable for working in dust and dust accumulation environment.

C. IMAGES:

Telescopic Conveyor NIHVA





D. Techno – Commercial Offer

Sr no	Description	Qty	Unit	Rate in INR	Net Amount INR
A	Telescopic Conveyor (Length -17 meters) with C track	1	No	17,64,000	17,64,000
B	Part Count Sensors with Display Panel	1	No	1,50,000	1,50,000
C	Installation Charges & training for above System	1	No	50,000	50,000
Total Cost of Project		**1**	**Set**		**19,64,000**

GST PUNE: 27AAECN0437H1ZM	**Amount in Words:**
HSN Code: 84289090	Rupees Nineteen Lacs Sixty-Four Thousand Only

E. Technical Specification for Telescopic Conveyor & System:

Sr No	Description	Specifications
1	Length of conveyor	17000 mm
2	Extended Length	12000 mm
3	Fixed Length	5000 mm
4	Width of conveyor	1000 mm (as bag is 800mm)
5	Material to be Convey	Gunny bags & cardboard
6	Dimension of gunny bags 1	800(L) x 600(W) mm
7	Dimension of gunny bags 2	600(L) x 600(W) mm
8	Dimension of Cardboard Box	600(L) x 280(W)x 330(H) mm
9	Weight of bags & Cardboard	6-30 kg s approximately
10	Material of construction	Mild Steel
11	Loading height from shop level	1200 mm
12	Speed of conveyor	30 meter/min.
13	Temperature	Ambient
14	Drive motor	5 HP Coupled geared motor
15	Control Unit	PLC, Control Panel
16	C track system	For manual movement
17	Counter System	For counting no of bags & box

18	Sensors	To detect, count bags & box
19	7 Segment Display	For display no of count
20	Reset Switch	For Settings of conveyor

E. Drawings Training and warranty

- **Drawing:**

We will issue a full set of drawings for approval within 2 weeks of receiving the confirmed order and finalized design details.

- **Training:**

After installation of the Conveyor system, we will train the Clients personnel in the operation and basic maintenance, including the understanding of the error codes on the control system (if applicable).

- **Warranty:**

I. The warranty period is twelve months from the date of installation and commissioning.

II. If a defect arises within the warranty period stated, which is attributable to faulty design,

III. materials or installation workmanship the product will be repaired at our discretion without charge.

IV. This guarantee is subject to proper use of the product and assumes that the product is regularly serviced and maintained by skilled personnel in accordance with the operation and maintenance instructions supplied.

- **Maintenance & Service Agreement:**

We would suggest that you take advantage of a maintenance and service agreement on the NIHVA products, which will guarantee trouble free operation and speed of response in an emergency. Customized proposals are available on request.

We are pleased to inform that we also undertake AMC for all of our products & for any of your existing facilities.

Maintenance and service aren't about what you get. They're about what you avoid: failures, losses and unplanned interruptions.

- **Client Scope:**

1. Civil work for C track / machineries/structural work required to support are in client scope.
2. Unloading from truck placement on site.
3. Exiting/Repair/ Modification/ Refurbishment charges will be extra.

G. Terms and Conditions: -

1. Price	: Ex. Works Pune
2. P & F	: 3 % Extra at the time of delivery.
3. Freight Notes	: Extra as applicable.
4. Delivery	: Within 9- 10 weeks from date of receipt of confirmed purchase order, advance payment, drawing approval.
5. Payment Terms	: 80% advance along with confirmed purchase order balance before dispatch.
6. Insurance	: Extra as applicable.
7. GST	: 28% Applicable on total supply value.
8. Validity	: 15 days from date of quotation.
9.Warranty	: 12 months from date of supply.

Please feel free to contact Mr. Mayur Derle on 7709209333 for any further clarification in this concern.

With Best Regards,
Pooja Badre
7709209333
For NIHVA Technologies Pvt Ltd