

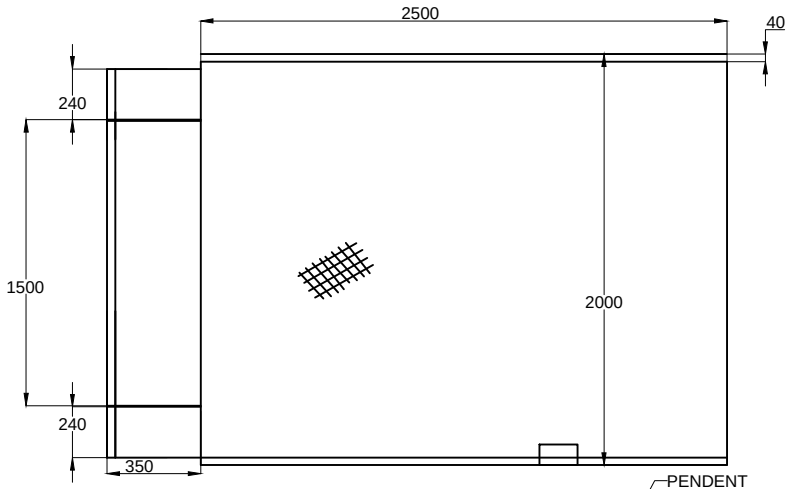


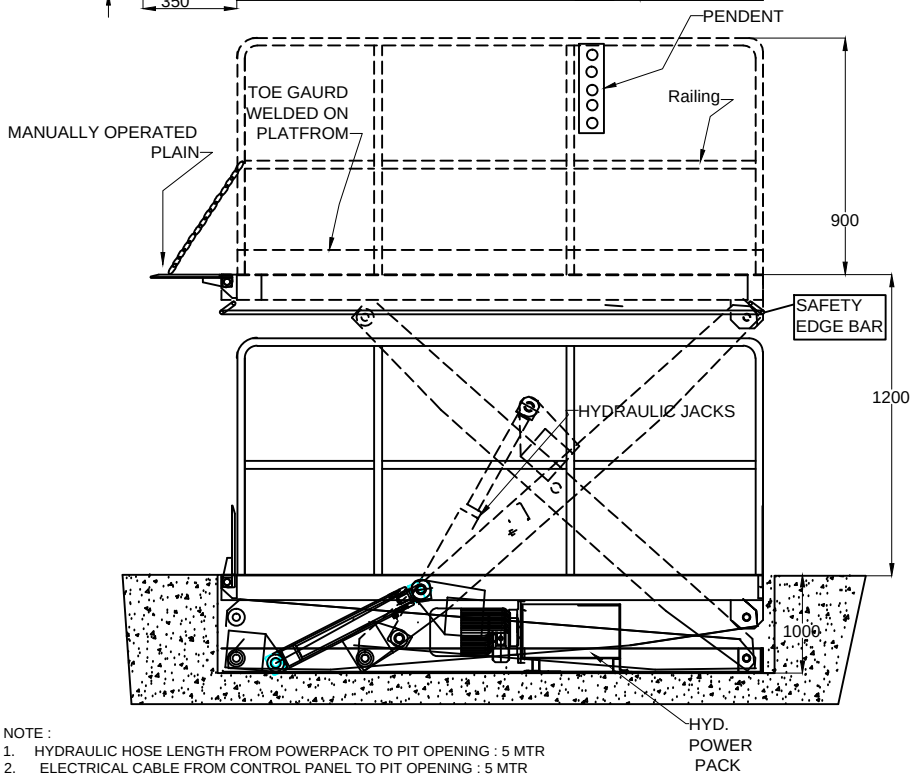

NOTE :
1. HYDRAULIC HOSE LENGTH FROM POWERPACK TO PIT OPENING : 5 MTR
2. ELECTRICAL CABLE FROM CONTROL PANEL TO PIT OPENING : 5 MTR
3. COLOR : GOLDEN YELLOW RAL 1004.
4. INPUT SUPPLY : 3 PHASE 400 VOLT WITH NEUTRAL NEAR POWER PACK LOCATION.
5. PAINTING - ALL PARTS IN GOLDEN YELLOW , ZEBRA MARKS FOR SIDE OF PLATFORM
6. GA DRAWING WITH ALL VIEWS IN SCALE 1:1 TO BE PROVIDED BEFORE MANUFACTURING.
7. OPERATION & MAINTENANCE MANUAL WITH SPARE PARTS LIST TO BE PROVIDED .
8. ALL RAW MATERIAL TEST CERTIFICATES TO BE PROVIDED .
9. INDIVIDUAL TEST CERTIFICATES OF HYDRAULIC CYLINDER & HYDRAULIC POWER-PACK TO BE PROVIDED BY SUPPLIER.
10. LOAD TEST TO BE PROVIDED BEFORE DISPATCH FOR RATED LOAD .

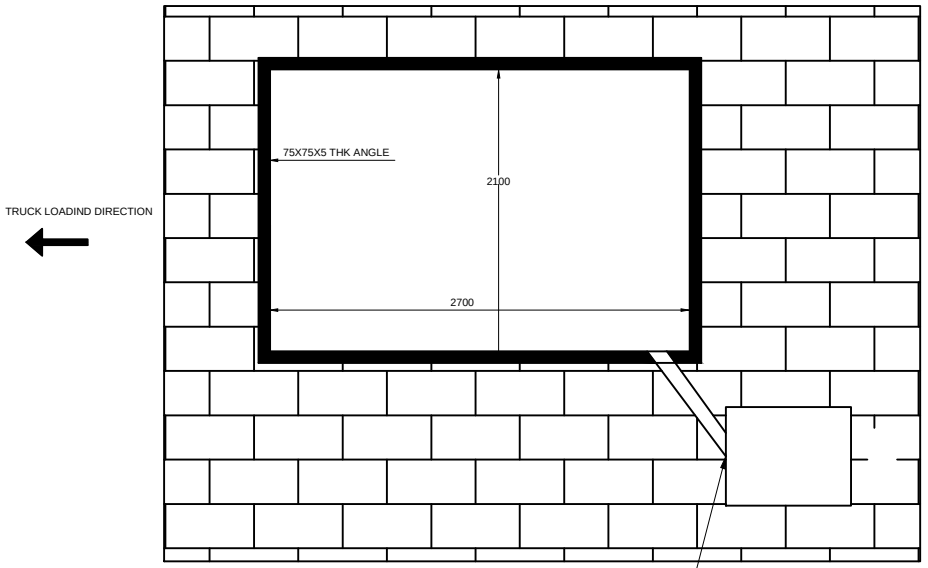

PIT DRAWING

NOTE :
1. PIT FOR SCISSORLIFT HAS TO BE DIAGONALLY WITHIN 3-5 MM
2. BASE OF THE PIT HAS TO BE IN WATER LEVEL AND RIGHT ANGLE TO THE VERTICAL SIDE WALLS
3. PROPER ARRANGEMENT FOR ROUTING HOSES AND CABLES HAVE TO BE MADE DEPENDING ON SITE CONDITIONS AND POSITION OF POWER PACK
4. COVERING REQUIRED FOR HOSES AND CABLES AND RELATED CIVIL WORK IS IN CLIENTS SCOPE
5. WATER DRAINAGE AND PIT CLEANING NEEDS TO BE CONSIDERED AND DONE BY CLIENT

Specifications			
	Equipment		Scissors Lift
	Rated Capacity	W Kgs	6000
Dimensions	Platform Length	mm	2500
	Width	mm	2000
	Overall Length	mm	2150
	Width	mm	2000
	Lip One side	mm	350 x2090
	Lip Operation		Manual
	Lip Type		Single
	Speed Lifting/Lower		3-4 / 2-3
	Heights Closed	mm	1000
	Lift	mm	1200
Drive	Lift Motor 3 Ph AC	H.P.	7.5
	Pendent		1 Nos
	Lift & Lower cut-off - Yes		
	supply hose - 6 m/ Cable - 5m		
	Colour - 1004		

EQUIPMENT - SCISSORS TABLE