

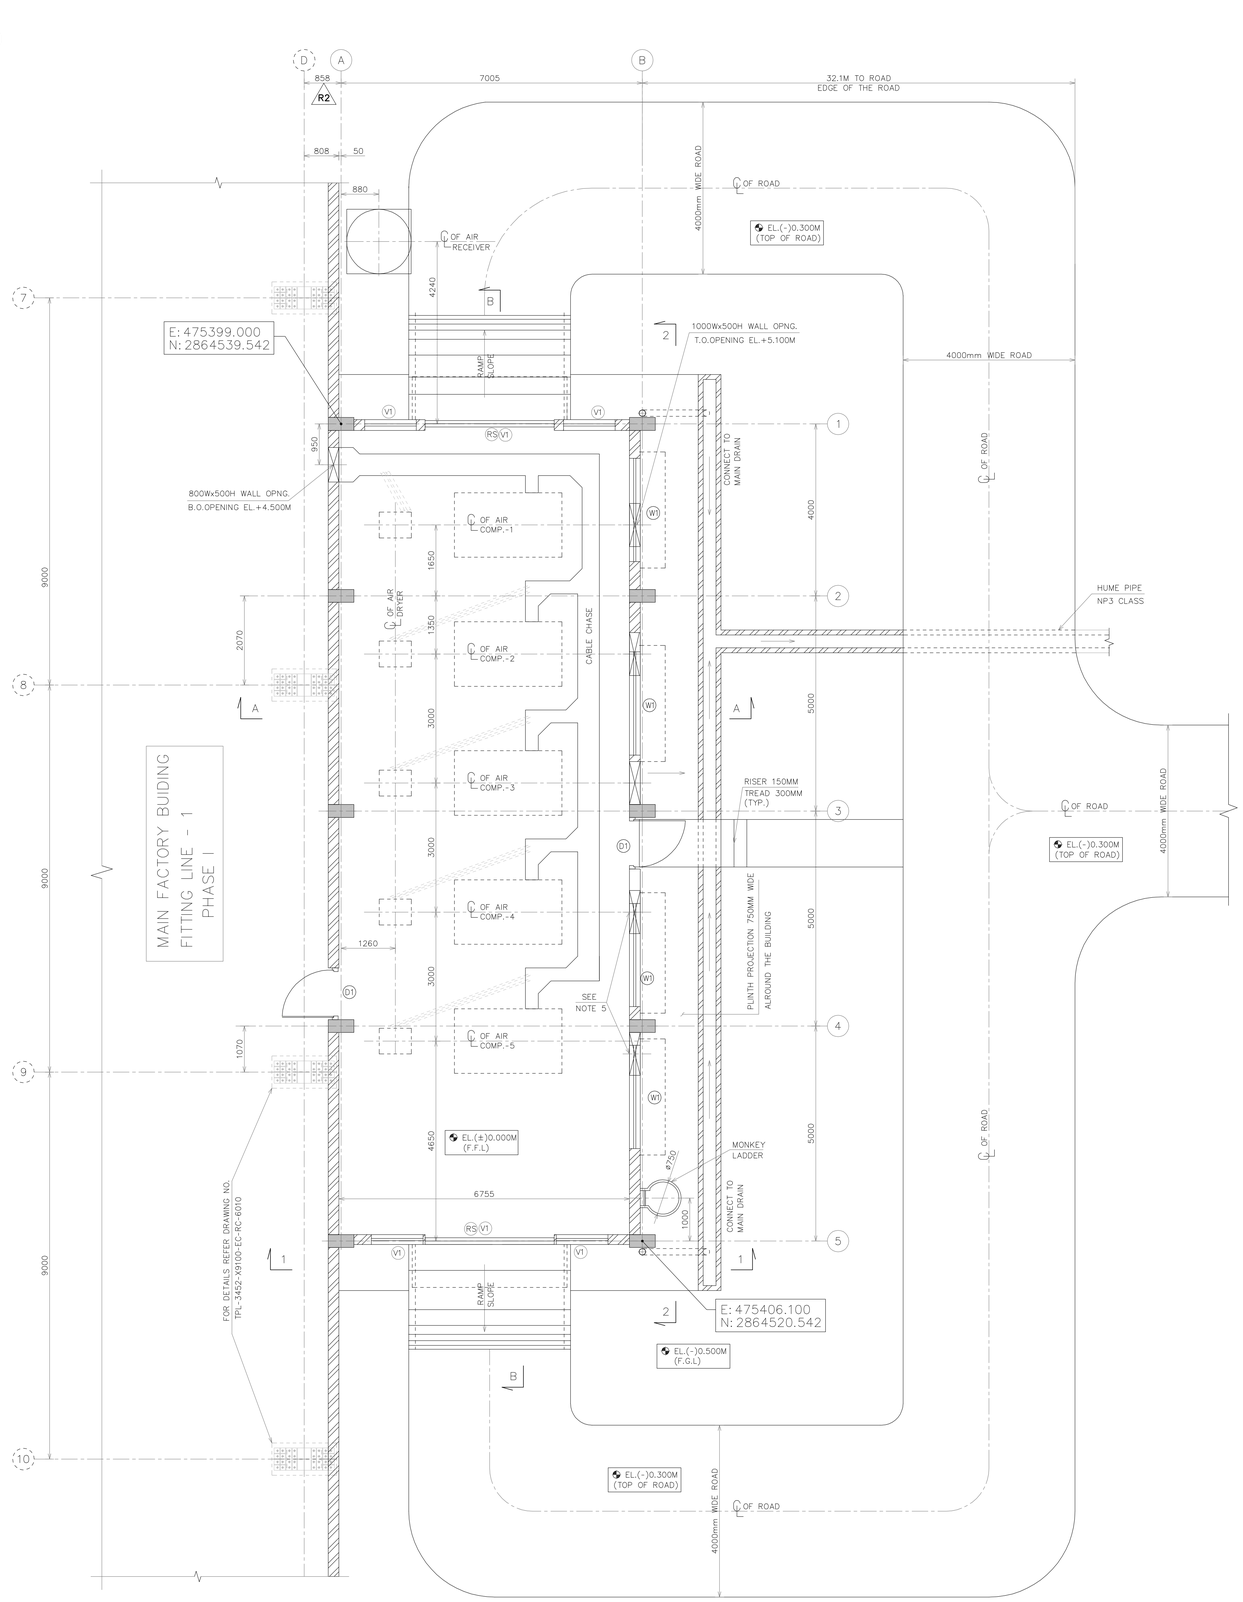


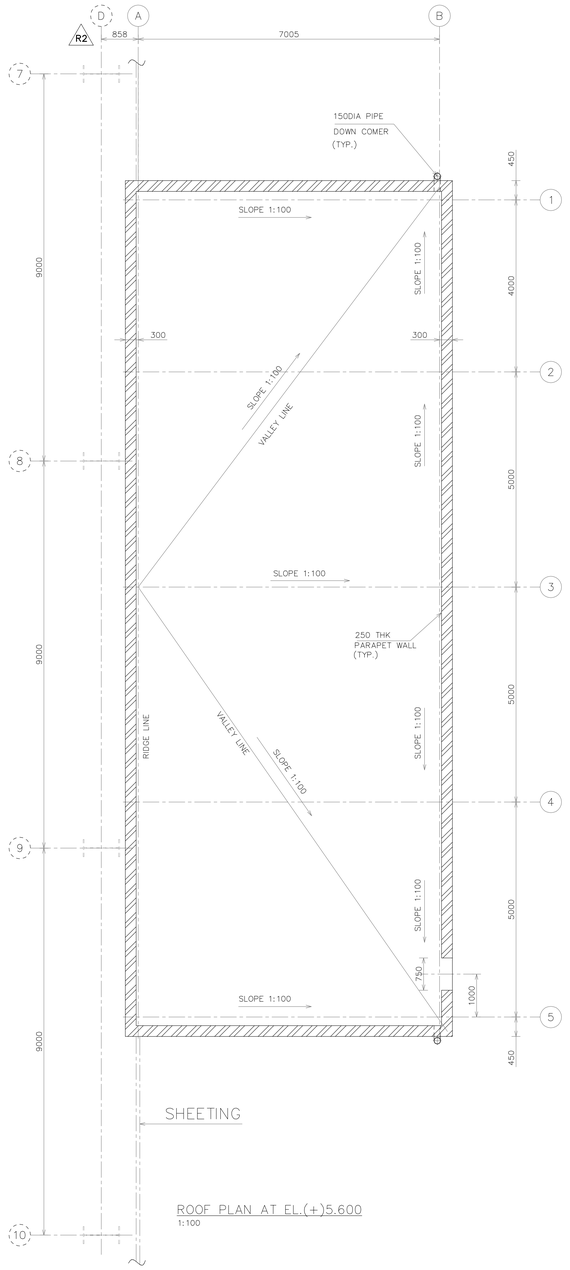

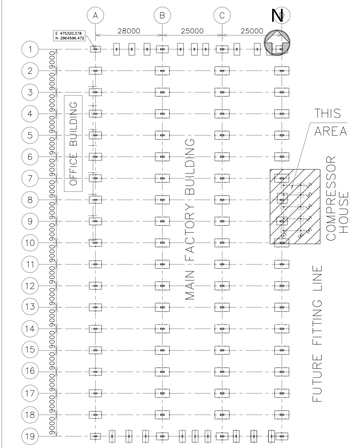

SCHEDULE OF EXTERNAL FINISHES

ROOFING	RCC
WALLS	250THK EXTERNAL BRICK WALLS, OVERALL 18MM THK CEMENT MORTAR PLASTERING WITH AN UNDER LAYER OF 12MM THK IN CM 1:5 AND TOP LAYER OF 6MM THK IN CM 1:5 WITH WEATHER SHIELD PAINT.
RWP	150 mm ø PVC DOWN TAKE PIPES - 2 NOS.
PAINT	TWO COATS OF WEATHER SHIELD PAINT OF BERGER MAKE OR APPROVED EQUIVALENT
WATER PROOFING (TERRACE)	BRICKBAT COBA OR EQUALENT

SCHEDULE OF INTERNAL FINISH:

FLOORING	VDF OVER FLOOR SEAL AND EPOXY (2MM THICK)
WALLS	250THK BRICK WALLS, OVERALL 15MM THK CEMENT MORTAR PLASTERING IN CM 1:5 WITH PLASTIC EMULSION PAINT
CEILING	6MM THK CEMENT MORTAR PLASTERING IN CM 1:5. WITH WATER BOUND DISTEMPER PAINT.
PAINT	TWO COATS OF PLASTIC ACRYLIC EMULSION OVER A COAT OF PRIMER

NOTES

1. ALL DIMENSIONS ARE IN MILLIMETRES AND LEVELS ARE IN METRES, UNO.
2. FFL EL.(±)0.000 CORRESPONDS TO RL. 44.300
3. THICKNESS OF ALL THE WALLS SHOWN IN THE DRAWING SHALL BE 250MM IN CM(1:6)
4. ALL DIMENSIONS OF MASONRY WALL, COLUMNS, BEAMS WALL THICKNESS, DOOR/WINDOW/VENTILATOR/ROLLING SHUTTER OR ANY OTHER OPENINGS, ARE SHOWN EXCLUSIVE OF PLASTER,FINISHING OR FRAMES.
5. HOT AIR DUCT OPENINGS TO BE CONFIRMED BY SEMAC FOR FUTURE COMPRESSORS.
6. OPENINGS FOR LOUVERS,FANS,HOTAIR,EXHAUST,CABLING,PIPING ARE TENTATIVE.
7. LOVERS AND FANS SHALL BE BY HVAC VENDOR.
8. GRADE SLAB SHALL BE UNDER HOLD TILL COMPRESSOR FINALIZATION.
9. FOR RAMP DETAILS REFER GRADE SLAB DETAILS

LEGEND

FGL - FINISHED GROUND LEVEL
FFL - FINISHED FLOOR LEVEL
EL - ELEVATION
TYP - TYPICAL

REFERENCE

1. FOR RC DETAILS OF FOUNDATION, PLINTH & TIE BEAM REFER DWG NO: TPL-3452-X9560-EC-RC-6105.

ENGG. REFERENCE

1. FOR GA OF COMPRESSOR HOUSE(NEAR FITTING LINE 1) REFER DWG NO: TPL-340052 -X5200-EM-GA-1201.

SCHEDULE OF OPENINGS:

S.NO	DESCRIPTION	MARKING	OPENING SIZE WIDTH	OPENING SIZE HEIGHT	MATERIAL	NO'S
1	ROLLING SHUTTER	RS	3000	4000	ROLLING SHUTTER (PARTLY LATHED & PARTLY GRILLED) MECHANICALLY OPERATED	2
2	WINDOWS	W1	2400	1500	MS PROFILED FULLY OPENABLE WINDOWS WITH 6MM GLASS SHUTTERS,	4
3	VENTILATOR	V1	1000	600	VENTILATOR WITH ALU. LOUVERED	6
4	STEEL DOOR	D1	1200	2400	GALVANIZED STEEL FLUSH DOOR CONFIRMING TO IS 277 WITH VISION GLASS SIZE OF 600MMx600MM	2

REV.NO.	DATE	REVISION	CIVIL	MECH	ELEC	INST	APPD	DRAWN
			CLEARED					
2	13.12.16	ISSUED FOR APPROVAL					AS	GMN
1	08.12.16	ISSUED FOR APPROVAL					AS	GMN
0	21.11.16	ISSUED FOR APPROVAL					AS	GMN

THIS DRAWING IS PROPERTY OF **"TATA PROJECTS LIMITED"** MUST NOT BE PASSED ON TO ANY PERSON OR BODY NOT AUTHORIZED BY US TO RECEIVE IT NOR BE COPIED OR OTHERWISE MADE USE EITHER IN FULL OR IN PART BY SUCH PERSON OR BODY WITHOUT OUR PRIOR PERMISSION IN WRITING.

EPC CONTRACTOR
TATA PROJECTS LIMITED
H. NO.1-7-80 TO 87, "MITHONA TOWERS - 1"
PRENDERGHAST ROAD, SECUNDERABAD - 500003.

PROJECT TITLE
PLANT FACILITY FOR
MADHEPURA ELECTRIC LOCOMOTIVE PRIVATE LIMITED
AT MADHEPURA, BIHAR.

OWNER
MADHEPURA ELECTRIC LOCOMOTIVE PRIVATE LIMITED

OWNER A/E CONSULTANT :
SEMAC CONSULTANTS PVT LTD
6-1-276, 2ND FLOOR, ARCHANA BLOCK,
CONJEEVARAM HOUSE, PADMARAO NAGAR
SECUNDERABAD - 500025.

	SIGNATURE	DATE
DRAWN	GMN	21.11.16
DESIGNED	SR	21.11.16
CHECKED	AS	21.11.16
DEPT HEAD	AS	21.11.16

RELEASED FOR: INFORMATION | APPROVAL ✓ | ENGINEERING | CONSTRUCTION

DWG. TITLE:
FACTORY AREA
COMPRESSOR HOUSE
ARCHITECTURAL PLAN

DEPT. CIVIL | JOB NO. 0000 | SCALE: – | SHEET: 1 OF 2 | SIZE : A0
FILE NAME. ALSTOM-M-AR-MFB-107
DWG.NO. TPL-3452-X9100-EC-AC-6206
REV./ISSUE R2